

Gigaset

SL78H

Issued by

Gigaset Communications GmbH

Frankenstr. 2a, D-46395 Bocholt

Manufactured by Gigaset Communications GmbH

under trademark license of Siemens AG.

As of 1 Oct. 2011 Gigaset products bearing the trademark 'Siemens' will exclusively use the trademark 'Gigaset'.

© Gigaset Communications GmbH 2010

All rights reserved. Subject to availability.

Rights of modification reserved.

www.gigaset.com

GIGASET. INSPIRING CONVERSATION.
MADE IN GERMANY

SIEMENS





Brief overview



- 1 **Display** in idle status
- 2 **Battery charge status** (→ page 14)
- 3 **Display keys** (→ page 17)
- 4 **Message key** (→ page 32)
Access to calls and message lists;
flashes: new message or new call
- 5 **End call key, On/Off key**
End call, cancel function, go back one menu level (press briefly), back to idle status (press and hold), activate/deactivate handset (press and hold in idle status)
- 6 **Hash key**
Keypad lock on/off (press and hold in idle status);
toggles between upper/lower case and digits
- 7 **Call-by-call list key** (→ page 27)
Open call-by-call list
- 8 **Charging socket**
- 9 **Microphone**
- 10 **Recall key**
- Consultation call (flash)
- Insert a dialling pause (press and hold)
- 11 **Star key**
Ring tones on/off (press and hold);
with an open connection: switch between dial pulsing/touch tone dialling (press briefly);
for text input: open a table of special characters
- 12 **Key 1**
Dial (network) answering machine (press and hold)
- 13 **Talk key**
Answer a call: open redial list (press briefly), start dialling (press and hold)
- 14 **Speaker key**
Switch between earpiece and speaker mode;
lights up: speaker activated
flashes: incoming call
- 15 **Control key** (→ page 16)
- 16 **Signal strength** (→ page 14)

Display symbols

The following symbols are displayed independently from the settings and the operating status of your phone:

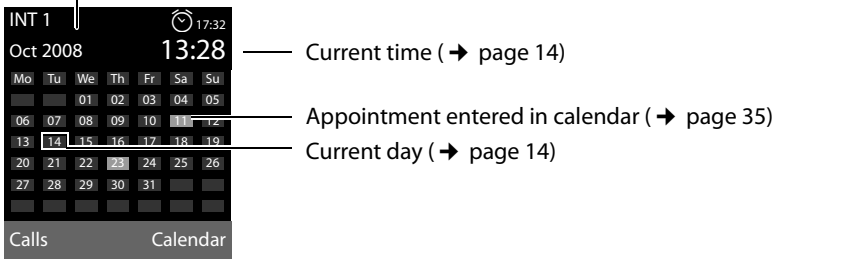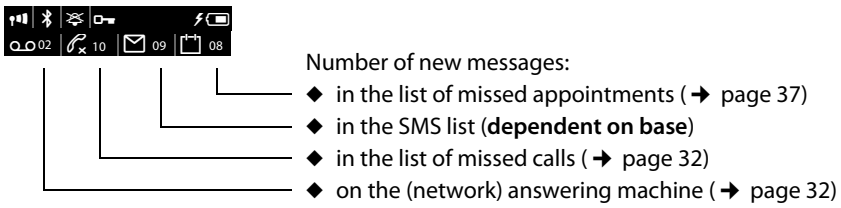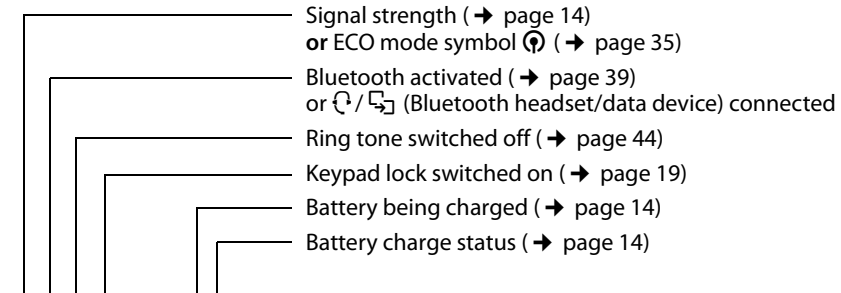

Signalling of

external call (→ page 24)



alarm clock (→ page 37)



internal call (→ page 26)



appointment (→ page 35) / anniversary (→ page 31)



Contents

Brief overview	1
Safety precautions	5
First steps	6
Check the pack contents	6
Installing the charging cradle	7
Setting up the handset for use	8
Setting the date and time	12
Connecting the USB data cable	14
What would you like to do next?	15
Using the phone	16
Control key	16
Display keys	17
Keys on the keypad	17
Correcting incorrect entries	17
Menu guidance	18
Activating/deactivating the handset	19
Activating/deactivating the keypad lock	19
Illustration of operating steps in the user guide	20
Menu tree	22
Making calls	24
Making an external call	24
Switching between pulse dialling and tone (DTMF) dialling	24
Ending a call	24
Accepting a call and Calling line identification (Russian AON or CallerID)	24
Speaker talking	26
Switch to mute	26
Making internal calls	26
Using the directory and lists	27
Directory/call-by-call list	27
Redial list	31
Call lists	31
Opening lists with the message key	32
Using the network mailbox	34
Configuring fast access for the network mailbox	34
Viewing the network mailbox report	34
ECO DECT	35
Setting an appointment (calendar)	35
Displaying missed appointments, anniversaries	37
Setting the alarm clock	37

- Using a handset as a room monitor 38**
- Using Bluetooth devices 39**
- Handset settings 41**
 - Quick access to functions and numbers 41
 - Changing the display language 42
 - Setting the display 42
 - Activating/deactivating auto answer 43
 - Changing the speaker/earpiece volume 43
 - Changing ring tones 44
 - Resource directory 45
 - Activating/deactivating advisory tones 46
 - Setting your own area code 46
 - Restoring the handset default settings 46
 - Questions and answers 48
 - Authorisation 48
- Environment 49**
- Appendix 49**
 - Caring for your telephone 49
 - Contact with liquid 50
 - Specifications 50
 - Writing and editing text 50
- Additional functions via the PC interface 52**
- Accessories 54**
- Index 55**

Safety precautions

Warning

Read the safety precautions and the user guide before use.

Explain their content and the potential hazards associated with using the telephone to your children.



Only use the charging cradle supplied with mains adapter.



Only use **recommended, rechargeable batteries** (→ page 50). Failure to do so could damage your health and cause injury.



The operation of medical appliances may be affected. Be aware of the technical conditions in your particular environment, e.g. doctor's surgery.



Do not hold the rear of the handset to your ear when it is ringing or when the speaker function is activated. Otherwise you risk serious and permanent damage to your hearing.

The handset may cause an unpleasant humming noise in hearing aids.



Do not install the charging cradle in bathrooms or shower rooms. The charging cradle is not splashproof (→ page 50).



Do not use your phone in environments with a potential explosion hazard (e.g. paint shops).



If you give your Gigaset to someone else, make sure you also give them the user guide.



Please remove faulty bases from use or have them repaired by our service, as they could interfere with other wireless services.

Please note

Not all of the functions described in this user guide are available in all countries.

First steps

Check the pack contents



- 1 one Gigaset SL78H handset,
- 2 one battery,
- 3 one battery cover,
- 4 one belt clip,
- 5 one charging cradle with mains adapter,
- 6 one user guide,
- 7 USB data cable,
- 8 CD-ROM (driver for the USB data cable).

Installing the charging cradle

The charging cradle is designed to be operated in enclosed, dry areas at temperatures ranging from +5°C to +45°C.

Please note

Pay attention to the range of the base.

This is up to 300 m in unobstructed outdoor areas and up to 50 m inside buildings. The range is reduced when Eco Mode is activated (→ page 35).

The phone's feet do not usually leave any marks on surfaces. However, due to the multitude of different varnishes and polishes used on today's furnishings, the occurrence of marks on the surfaces cannot be completely ruled out.

Please note:

- ◆ Never expose the telephone to the influence of heat sources, direct sunlight or other electrical devices.
- ◆ Protect your Gigaset from moisture, dust, corrosive liquids and vapours.

Setting up the handset for use

The display and keypad are protected by a plastic film.
Please remove protective film.

Inserting the battery and closing the battery cover

Warning

Use only the rechargeable batteries (→ page 50) recommended by Gigaset Communications GmbH, as this could otherwise result in significant health risks and damage to property. For example, the outer casing of the batteries could be destroyed or the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.

- ▶ First insert the battery at the top **a**.
- ▶ Then press the battery downwards **b** until it clicks into place.




- ▶ First, align the protrusions on the side of the battery cover with the notches on the inside of the housing.
- ▶ Then press the cover until it clicks into place.

If you need to **open the battery cover again** to connect the USB data cable or change the battery:

- ▶ Remove the belt clip (if fitted).
- ▶ Use a fingernail placed into the notch at the bottom of the casing to pull the battery cover upwards.




To **change the battery**, place your fingernail in the cavity on the casing and pull the battery upwards.

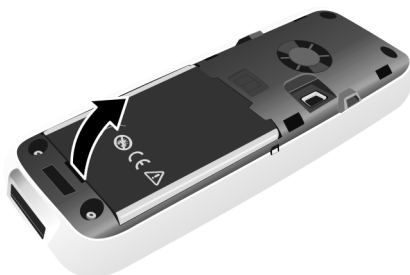

Attaching/removing the belt clip

The handset has notches on each side for mounting the belt clip.

- ▶ **To attach:** Press the belt clip onto the back of the handset so that the protrusions on the belt clip engage with the notches.
- ▶ **To remove:** Use the right thumb to press the belt clip slightly to the right of centre, slide the fingernail of the left hand index finger between the clip and the casing and lift the clip upwards.



Placing the handset in the charging cradle

- ▶ Insert the mains adapter for the charging cradle into the mains socket.
- ▶ Place the handset in the charging cradle with its **display facing forward**.

To charge the battery, leave the handset in the charging cradle.

Please note

Only place the handset in the charging cradle that is intended for it.

Registering handsets

A Gigaset SL78H handset can be registered to up to four bases.

Registration of Gigaset SL78H


You must initiate handset registration on the handset (1) and on the base (2).

Once it has been registered, the handset returns to idle status. The handset's internal number is shown in the display e.g. INT 1. If not, repeat the procedure.


1) On the handset



- ▶ Press the key below **Register** on the display screen to open the input field.

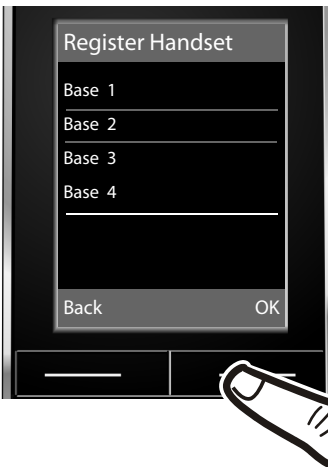

The submenu **Register Handset** is shown in the display.



- ▶ Press **downwards** on the control key to select the required base.

- ▶ Press the key below **OK** on the display screen to start the registration. If requested, enter the system PIN of the base (the default is 0000) and press **OK**.

The display indicates that a base that is ready for registration is being searched for.

Please note

If the handset is already registered to a base, start the registration procedure as follows:

 →  → **Registration** → **Register Handset**

2) On the base

Within 60 seconds press and **hold** the registration/paging key on the base (approx. 3 sec.).

Please note

Information on how to de-register can be found in your user guide for the base.

First battery charge and discharge

The correct charge status can only be displayed if the battery is first fully charged and discharged.



► For this, place the handset in the charging cradle for **six** hours.

► Once the battery is fully charged, remove the handset from the cradle and do not put it back again until the battery is fully discharged.

Please note


- ◆ After the first battery charge **and** discharge, you may place your handset in the charging cradle after every call.
- ◆ Always repeat the charging and discharging procedure if you remove the battery from the handset and reinsert it.
- ◆ The battery may heat up during charging. This is not dangerous.
- ◆ After a time, the charge capacity of the battery will decrease for technical reasons.

Setting the date and time

Set the date and time so that the correct date and time can be assigned to incoming calls, and so that the alarm and the calendar can be used.



- ▶ Press the key below **Time** on the display screen to open the input field. (If you have already entered the date and time, open the input field via the menu → page 23.)



The submenu **Date/Time** is shown in the display.

- ▶ The active input position flashes. Using the keypad, enter the day, month and year using 8 characters, e.g.

1	0	0	4
---	---	---	---

MMDD

1	0	0	+
---	---	---	---


YYMMDD

2	0	0	+
---	---	---	---


MMDD

0	+
---	---

 for 14/10/2008.



Should you wish you change the input position (for example to correct an entry), press **right** or **left** on the control key.



- ▶ Press **downwards** on the control key to skip to the input field for the time.

- ▶ Enter the hours and minutes as four digit numbers via the handset e.g.

0	+	7	15
---	---	---	----

MMDD


1	0	0	+
---	---	---	---

YYMMDD

0	+
---	---

 for 07:15. Change the input position, using the control key if necessary.



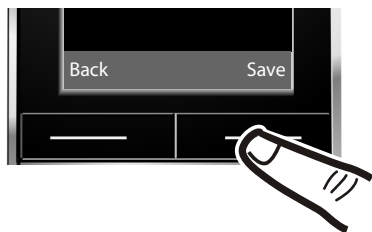

- ▶ Press the key below **Save** on the display screen to save your entries.



The display shows **Saved**. You will hear a confirmation tone.



- ▶ Press the key below **Back** on the display screen to return to idle status.

Display in idle status

Once the phone is registered and the time set, the idle display is shown as in this example. After successful registration the following is displayed:



- ◆ the strength of the reception signal between base and handset:

- good to poor:
- no reception: flashes

- ◆ battery charge status:

outside the charger

- white: charged over 66 %
- white: charged between 33 % and 66 %
- white or red*: charged under 33 %
- flashes red: battery almost empty (less than 10 minutes talktime)

in the charger

- white: battery is charging

* red: older firmware version, please update the handset's firmware (→ page 53)

Your phone is now ready for use!

Please note

- ◆ The range icon is only displayed in idle status if Eco Mode+ is deactivated (→ page 35).
- ◆ In idle status, the calendar display can be switched on and off (→ page 35).

Connecting the USB data cable

You can connect the supplied USB data cable to the back panel of your telephone to connect the telephone to a PC (→ page 52).









- ▶ Remove the belt clip (if fitted) (→ page 9).
- ▶ Remove the battery cover (→ page 9).
- ▶ Connect the USB data cable to USB socket **1**.



What would you like to do next?

Now you have successfully started your Gigaset, you will probably want to adapt it to your personal requirements. Use the following guide to quickly locate the most important subjects.



If you are unfamiliar with menu-driven devices such as other Gigaset telephones, you should first read the section entitled "Using the phone" → page 16.


Information on is located here.
Setting the ring tone and volume	 page 44
Setting the handset volume	 page 43
Switching pulse/tone (DTMF) dialing	 page 24
Calling line identification (number identification or CallerID)	 page 24
Setting Eco Mode / Eco Mode+	 page 35
Transferring directory entries from existing Gigaset handsets to the new handset(s)	 page 29
Using Bluetooth devices	 page 39
Connecting the telephone to a PC	 page 52

If you have any questions about using your phone, please read the tips on troubleshooting (→ page 48) or contact our Customer Care team (→ page 47).

Using the phone





Control key

In the text below, the side of the control key that you must press in the operating situation described is marked in black (top, bottom, right, left, centre), e.g.  for "press right on the control key" or  for "press the centre of the control key".





The control key has a number of different functions:







When the handset is in idle status

-  Open the directory.
-  Open the main menu.
-  Open the list of handsets.
-  Menu for setting the handset's call volume (→ page 43).




In the main menu, in submenus and lists

-  /  Scroll up/down line by line.

In input fields

You can use the control key to move the cursor up , down , right  or left . Press and hold  or  to move the cursor word by word.

During an external call

-  Open the directory.
-  Initiate an internal consultation call.
-  Adjust the loudspeaker volume for earpiece and speaker mode.

Functions when clicking on the middle of the control key

The key has different functions, depending on the operating situation.


- ◆ **In idle status** the main menu is opened.
- ◆ **In the submenus, selection and input fields** the key takes on the function of the display keys **OK**, **Yes**, **Save** or **Change**.

Please note

In this guide, operation is shown via the right control key and the display keys. However, if you prefer, you can also use the control key as described.

Display keys





The function of the display keys changes depending on the particular operating situation. Example:

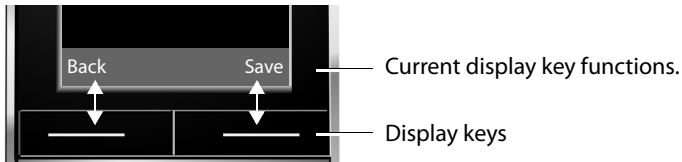

Important display keys include:


Options	Open a context-dependent menu.
OK	Confirm selection.
< C	Delete key: Delete character/word by word from right to left.
Back	Go back one menu level or cancel operation.
Save	Save entry.
→→	Open the redial list.

Keys on the keypad

 /  /  etc.	Press the matching key on the handset.
	Enter digits or letters.

Correcting incorrect entries


You can correct incorrect characters in the input fields by navigating to the incorrect entry using the control key. You can then:

- ◆ Delete the **character** to the left of the cursor with the display key  (press and hold to delete the word)
- ◆ Insert characters to the left of the cursor
- ◆ Overwrite the highlighted (flashing) character, e.g. when entering the time or date.

Menu guidance

Your telephone's functions are accessed using a menu that has a number of levels.


Main menu (first menu level)


- ▶ Press the control key **right**  in the handset's idle status to open the main menu.

The main menu functions are shown in the display using symbols. The selected function is indicated by means of an orange circle around the symbol, and the associated name appears in the header of the display.

To access a function, i.e. to open the corresponding sub-menu (next menu level):

- ▶ Using the control key , navigate to the required function and press the display key **OK**.


Press the display key **Back** or the end call key  **briefly** to return to idle status.





Submenus

The functions in the submenus are displayed in a list form (example to the right).

To access a function:


- ▶ Scroll to the function with the control key  and press **OK**.

Press the display key **Back** or the end call key  **briefly** to return to the previous menu level or to cancel the operation.



Reverting to idle status

You can revert to idle status from anywhere in the menu as follows:

- ▶ Press and **hold** the end call key .

Or:

- ▶ Do not press any key: after 2 minutes the display will **automatically** revert to idle status.

Settings that are not confirmed by pressing the display keys **OK**, **Yes**, **Save** or **Change** will be lost.

An example of the display in idle status is shown on page 14.

Activating/deactivating the handset



With the phone in idle status, press and **hold** the end call key (confirmation tone) to switch off the handset.
Press and **hold** the end call key again to switch the handset on.

Please note


When switching on, an animation of a clock will be displayed for several seconds.

Activating/deactivating the keypad lock

The keypad lock prevents any inadvertent use of the phone.



Press and **hold** the hash key to activate or deactivate the keypad lock. You will hear the confirmation tone.

When the keypad lock is activated you will see the icon  in the display and a message when you press a key.

The keypad lock is deactivated automatically if someone calls you. It is reactivated when the call is finished.

Illustration of operating steps in the user guide


The operating steps are shown in abbreviated form.


Example:

The illustration:


 → **Settings** → **Telephony** → **Auto Answer** (☑ = on)

means:




- ▶ Press **right** on the control key  to open the main menu.



- ▶ Using the control keys, navigate right, left, up and down  until the submenu **Settings** is selected.

- ▶ Press the display key **OK** to confirm your selection.



- ▶ Press the bottom of the control key  until the menu item **Telephony** appears on the display.

- ▶ Press the display key **OK** to confirm your selection.



The **Auto Answer** function is already selected.


- ▶ Press the display key **Change** to activate/deactivate the function.



The change is immediately effective and does not need to be confirmed.

- ▶ Press the key below **Back** on the display screen to return to the previous menu level.

or

Press and **hold** the end call key  to return to idle status.

Menu tree

With the telephone in **idle status**, press  (open main menu):

 **Select Services** (Menu dependent on base)

 **Bluetooth**

Activation	→ page 39
Search for Headset	→ page 40
Search for DataDevice	→ page 40
Known Devices	→ page 40
Own Device	→ page 41

 **Additional Features**

Room Monitor	→ page 38	
Resource Directory	Screensavers	→ page 45
	Caller Pictures	→ page 45
	Sounds	→ page 45
	Capacity	→ page 45

 **Call Lists** → page 31

 **SMS** (Menu dependent on base)

 **Answering Machine** (Menu dependent on base)

 **Organizer**

Calendar	→ page 35
Alarm Clock	→ page 37
Missed Alarms	→ page 37

 **Directory** → page 27



Settings

Date/Time	→ page 12
Audio Settings	Call Volume → page 43
	Ringer Settings → page 44
	Advisory Tones → page 46
	Music on hold (dependent on base)
Display	Screensaver → page 42
	Backlight → page 43
Language	→ page 42
Registration	→ page 10 (Submenu dependent on base)
Telephony	(Submenu dependent on base)
System	(Submenu dependent on base)
Reset	→ page 46 (Submenu dependent on base)

Making calls

If the backlight is deactivated (→ page 43) it is switched on by pressing any key. In this case the pressed key has no other function.

Making an external call

External calls are calls using the public telephone network.




Enter the number and press the talk key (PSTN).

Or:



Press and **hold** the talk key until **Dialling** is displayed, then enter the number.

You can cancel the dialling operation with the end call key .

You are shown the duration of the call while the call is in progress.

Please note

Dialling using the directory, the call-by-call list (page 1, page 27) or the calls and redial list (page 31/page 31) saves you from having to re-enter numbers and network provider prefixes ("call-by-call numbers").

Continuing a call on a Bluetooth headset


Precondition: Bluetooth is activated; a connection has been established between the Bluetooth headset and the handset (→ page 39).

Press the talk key on the Bluetooth headset; it may take up to 5 seconds to establish a connection to the handset.

For further details about your headset, see the user guide issued with it.

Switching between pulse dialling and tone (DTMF) dialling

The default setting is pulse dialling.



- ▶ For temporary activation of tone dialling (for example, to dial an extension or listen to voice mail messages), press the  button after a connection has been made with pulse dialling. When the call is ended, the phone will automatically reset to pulse dialling.
- ▶ Activation of tone dialling instead of pulse dialling if your provider supports tone dialling.

Ending a call



Press the end call key.

Accepting a call and Calling line identification (Russian AON or CallerID)

The handset indicates an incoming call in three ways: by ringing, by a display on the screen and by the flashing speaker key . If necessary, press the display key  to display the number or name of the caller.

Calling line identification is based on either so-called Russian AON or a CallerID function that is standardised for digital PBX (for example, CLIP FSK is number identification coupled with data transfer to the caller using frequency modulation technology or CLIP DTMF, dual-tone multi-frequency modulation).

You should request the CLIP service (also known as Digital AON) from your network provider, if your provider supports it.

This phone model supports Calling Line Identification using both Russian AON and CallerID functions (CLIP FSK and CLIP DTMF). For correct line identification, you should set

your handset to the type of Calling Line Identification used.



Open the main menu

Press these buttons.




Set Calling Line Identification to 0 if you have CLIP (CLIP FSK or CLIP DTMF) and press **OK**.



If you have no CLIP, enter the number of digits (1-9) transmitted and press **OK**. The factory setting is 7 digits. Please ask your provider if you wish to know how many digits of the caller's number are transmitted and identified by the Russian AON.

If the number of the caller is saved in your directory, you will see their name, and if you have assigned a caller picture to that caller, this will also be displayed after a short delay if you have the CallerID service of your provider and identification is successful.

If you have no CallerID (CLIP) service but wish to see the number or the name of a caller, press the left display key **AON** (it appears some seconds after you have started a call) and you will see the caller's number if identification is successful.

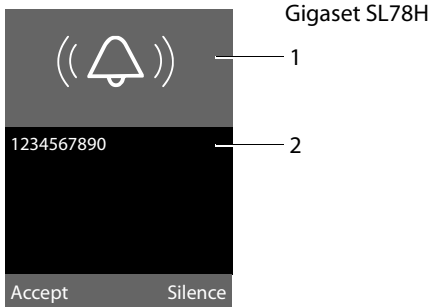

Gigaset SL78H

1 Ringtone icon

2 Number or name of the caller




If you do not have the CLIP service, **External** is displayed instead of the number:

- ◆ If no number is transmitted.
- ◆ If the **AON** key has not been pressed.
- ◆ If the caller has not arranged Calling Line Identification.

If you have the CLIP service, the following is displayed in place of the number:

- ◆ **External**, if no number is transmitted.
- ◆ **Withheld**, if the caller has not arranged Calling Line Identification.

You can accept the call by:

- ▶ Pressing the talk key .
- ▶ Pressing the speaker key .
- ▶ Gigaset SL780: Press the display key **Accept**.
- ▶ Gigaset SL785: Press the display key  to divert the call to the answering machine.

If the handset is in the charging cradle and the **Auto Answer** function is activated (→ page 43), the handset will take a call automatically when you lift it out of the cradle. Please note that to display the caller's phone number or name (see next section), the display key **CLIP** must be pressed **before the call is accepted**.

To deactivate the ring tone, press the **Silence** display key. You can take the call as long as it is displayed on the screen.

Accepting a call on a Bluetooth headset

Precondition: Bluetooth is activated; a connection has been established between the Bluetooth headset and the handset (→ page 39).

Only press the talk key on the headset when the headset rings; it can take up to 5 seconds.

For further details about your headset, see the user guide issued with it.

Speaker talking

In speaker mode, instead of holding the handset to your ear you can put it down, for example on the table in front of you. This allows others to participate in the call.

Activating/deactivating speaker mode

Activating while dialling



Enter the number and press the speaker key.

- ▶ You should inform your caller before you use the speaker function so that they know someone else is listening.



Switching between earpiece and speaker mode



Press the speaker key.

Activate/deactivate speaker during a call.

If you wish to place the handset in the charging cradle during a call:

- ▶ Press and hold the speaker key  while placing the handset in the base. If speaker key  does not light up, press the key again.

For instructions on how to adjust the loud-speaker volume, → page 43.

Switch to mute

You can deactivate the microphone in your handset during an external call.

Mute

Press the display key to mute the handset. The display shows **Microphone is off**.

Mute off

Press the display key to reactivate the microphone.

Making internal calls

Internal calls to other handsets registered on the same base are free.

Calling a specific handset



Initiate internal call.



Enter the number of the handset.

Or:



Initiate internal call.



Select handset.



Press the talk key.

Calling all handsets ("group call")



Initiate internal call.



Press the star key.

or

Call All

Select menu option and



Press the talk key.

All handsets are called.

Ending a call



Press the end call key.

Using the directory and lists

The options are:

- ◆ Directory
- ◆ Call-by-call list
- ◆ Redial list
- ◆ Incoming SMS message list (dependent on base)
- ◆ Call lists
- ◆ List of missed appointments
- ◆ (Network mailbox)/answering machine list.

You create the directory and call-by-call list for your own individual handset. You can also send lists/entries to other handsets (→ page 29).

Directory/call-by-call list

You can save a total of 500 entries in the directory and call-by-call list.


Please note

For quick access to a number from the directory or the call-by-call list (quick dial), you can assign the number to a key (→ page 41).

Directory

In the **directory**, you can save

- ◆ Up to three numbers and associated first names and surnames,
- ◆ e-mail address,
- ◆ anniversaries with reminder,
- ◆ VIP ring tone with VIP symbol,
- ◆ CLIP pictures.

In idle status, open the directory with the  key or via the menu (→ page 22).

Length of the entries


3 numbers: each max. 32 digits

First name and surname:
each max. 16 characters

E-mail address: max. 60 characters

Call-by-call list

The **call-by-call list** is used to store the access codes for network providers ("Call-by-call numbers").

- ▶ Open the call-by-call list in idle status by pressing the  key.

Length of the entries

Number: max. 32 digits

Name: max. 16 characters

Storing a number in the directory

 → **New Entry**

- ▶ Change multiple line input:

First Name: / Surname:

Enter the first and/or surname.




If you do not enter a name in either of the fields, the phone number is also saved and displayed in place of a surname.

(Instructions on entering text and special characters can be found on page 50.)

Phone (Home): / Phone (Office): /

Phone (Mobile):

Enter a number in at least one of the fields.

When scrolling through the directory, the entries are indicated by a preceding symbol:  /  / .

E-Mail:

Enter e-mail address.

Anniversary:

Select **On** or **Off**.


When setting **On**: Enter **Anniversary (Date)** and **Anniversary (Time)** and select reminder type: **Anniversary (Signal)**

→ page 30.

Using the directory and lists

Caller Melody (VIP):

You can mark a directory entry as a VIP (Very Important Person) by assigning a specific ring tone to it. VIP calls can be recognised by the ring tone.


When scrolling through the directory, VIP entries are indicated by the symbol .

Precondition: Calling Line Identification.

Caller Picture:

If required, select a picture to be displayed when the caller calls (see Resource directory, page 45).

Precondition: Calling Line Identification (CLIP).

 Press the display key.

Storing a number in the call-by-call list

 → **New Entry**


▶ Change multiple line input:

Name:

Enter name.

Number:

Enter the number.

 Press the display key.

Order of directory entries



Directory entries are generally sorted alphabetically by surname. Spaces and digits take first priority. If only the first name was entered in the directory, this is incorporated into the sort order instead of the surname.

The sort order is as follows:



1. Space
2. Digits (0–9)
3. Letters (alphabetical)
4. Other characters

To get round the alphabetical order of the entries, insert a space or a digit in front of the first letter of the surname. These entries will then move to the beginning of the directory.

Selecting entries in the directory and call-by-call list

 /  Open the directory or call-by-call list.


You have the following options:

- ◆ Use  to scroll through the entries until the required name is selected.
- ◆ Enter the first letter in the name (max. 8) or use  to scroll to the entry.

The surname is searched for in the directory. Where no surname is entered, the first name is used.

Dialling with the directory/call-by-call list


 /  →  (select entry)


 Press the talk key. The number is dialled.


Managing directory/call-by-call entries

Viewing entries


 /  →  (select entry)

 Press the display key. The entry is displayed.

 Press the display key.

The following functions can be selected with :

Display Number

To edit or add to a saved number, or to save it as a new entry, press  after the number is displayed.

Delete Entry

Delete selected entry.

Copy Entry

to Internal: Send a single entry to a handset (→ page 29).

vCard via SMS: Send a single entry in vCard format via SMS (dependent on base).

vCard via Bluetooth: Send a single entry in vCard format via Bluetooth.

Editing entries

 /  →  (select entry)

View **Edit** Press display keys one after the other.

- ▶ Carry out changes and save.

Using other functions



 /  →  (select entry)

→ **Options** (open menu)

The following functions can be selected with

:

Display Number

Edit or modify a saved number and then dial with  or save as a new entry; to do so, press  after the number appears on the display.

Edit Entry

Edit selected entry.

Delete Entry

Delete selected entry.

Copy Entry

to Internal: Send a single entry to a handset (→ page 29).

vCard via SMS: Send a single entry in vCard format via SMS (dependent on base).

vCard via Bluetooth: Send a single entry in vCard format via Bluetooth.

Delete All

Delete **all** entries in the directory/call-by-call list.

Copy All

to Internal: Send the complete list to a handset (→ page 29).

vCard via Bluetooth: Send the complete list in vCard format via Bluetooth.

Available Memory

Display the available entries in the directory and call-by-call list (→ page 27).

Using quick dial keys

- ▶ Press and **hold** the required quick dial key (→ page 41).

Linking call-by-call numbers with one number

You can insert the dialling code of a network provider ahead of the number ("linking").



Open call-by-call list.



Select entry (call-by-call number).

Options

Press the display key.

Display Number

Select and press **OK**.



Enter number or select number from the directory (→ page 30).



Press the talk key. Both numbers are dialled.

Sending the directory/call-by-call list to another handset

Preconditions:

- ◆ The sending and receiving handsets must both be registered to the same base.
- ◆ The other handset and the base can send and receive directory entries.

 /  →  (select entry)

→ **Options** (open menu) → **Copy Entry / Copy All** → **to Internal**



Select the internal number of the receiving handset and press **OK**.

You can transfer several individual entries one after the other by responding **Yes** to the **Entry copied - Copy next entry?** prompt.



A successful transfer is confirmed by a message and confirmation tone on the receiving handset.

Please note:


- ◆ Entries with identical numbers are not overwritten on the receiving handset.
- ◆ The transfer is cancelled if the phone rings or if the memory of the receiving handset is full.
- ◆ Entered anniversary reminders, pictures and sounds are not sent.

Transferring the directory as a vCard with Bluetooth

In Bluetooth mode (→ page 39), you can transfer directory entries in vCard format, e.g. to exchange entries with your mobile phone.

 →  (Select entry) → **Options**
(Open menu) → **Copy Entry / Copy All**
→ **vCard via Bluetooth**


The list of "Known Devices" (→ page 40) is displayed.

 Select device and press **OK**.

Receiving a vCard with Bluetooth

Where a device sends a vCard to your handset from the "Known Devices" (→ page 40) list, this process takes place automatically. You will be informed via the display.

If the sending device does not appear in the list, you will be asked on the display to enter the device PIN for the sending device:

 Enter the PIN for the **sending** Bluetooth device and press **OK**.

The transferred vCard is available as a directory entry.

Copying a displayed number to the directory

You can copy numbers displayed in a list, e.g. the call list or redial list, to the directory.



A number is displayed:


Options → **Copy to Directory**

▶ Complete the entry → page 27.

Copying a number or e-mail address from the directory

In some operating situations you can open the directory, for example to copy a number or e-mail address. Your handset need not be in idle status.



▶ Depending on the operating situation, open the directory with  or .

 Select entry (→ page 28).


Saving an anniversary in the directory


For each number in the directory, you can save an anniversary and specify a time at which a reminder call should be made on the anniversary (default setting: **Anniversary: Off**).

Anniversaries are automatically recorded in the calendar (→ page 35).

 →  (Select entry)

View **Edit** Press display keys one after the other.

 Scroll to the **Anniversary:** line.

 Select **On**.

▶ Change multiple line input:

Anniversary (Date)

Enter day/month/year in 8-digit format.

Anniversary (Time)

Enter the hour/minute for the reminder call in 4-digit format.

Anniversary (Signal)



Select the type of signal for the reminder.

Save Press the display key.


Please note

A time must be specified for reminder calls. If you select a visual signal, a time is not required and is automatically set to 00.00.

Deactivating anniversaries

 →  (Select entry)

View **Edit** Press display keys one after the other.

 Scroll to the **Anniversary:** line.

 Select **Off**.

Save Press the display key.

Reminder call on an anniversary

In **idle status**, a reminder call is signalled in the handset display (→ page 2) and with the selected ring tone.

You can:

Off Press the display key to acknowledge and end the reminder call.




While you are making calls a reminder call is signalled **once** via an advisory tone to the handset.

Anniversaries that have not been acknowledged and that are signalled during a call are entered in the **Missed Alarms** list (→ page 37).

Redial list



The redial list contains the twenty numbers last dialled with the handset (max. 32 digits). If a number is in the directory or the call-by-call list, then the appropriate name will be displayed.


Manual last number redial

-  Press the key **briefly**.
-  Select entry.
-  Press the talk key again. The number is dialled.

When a name is displayed, you can display the corresponding phone number by pressing the display key **View**.

Managing entries in the redial list

-  Press the key **briefly**.
-  Select entry.
- Options** Open menu.

The following functions can be selected with :

Copy to Directory

Copy an entry to the directory (page 27).

Display Number (as in the directory, page 29)

Delete Entry (as in the directory, page 29)

Delete All (as in the directory, page 29)

Call lists


Precondition: Calling Line Identification (CLIP).

Your telephone saves different types of calls, depending on the base:

- ◆ Answered calls
- ◆ Outgoing calls
- ◆ Missed calls

You can display each type of call individually or have an overall view of all calls. The last 20 entries in each case are displayed.

In idle mode, you can open the call lists using the display key **Calls** or via the menu:




List entry

New messages are displayed at the top.

Example of list entries:



- ◆ List type (in header)
- ◆ Status of entry
Bold: New entry
- ◆ Number or name of caller
- ◆ Date and time of call (if set, page 12)
- ◆ Type of entry:
 - Accepted calls (☎✓)
 - Missed calls (☎x)
 - Outgoing calls (☎→)

Press the talk key  to call the selected caller back.

Press the display key **View** to display additional information, for example the number corresponding to a name.

Press the display key **Options** to select the following functions:

Copy to Directory

Copying a displayed number to the directory.

Delete Entry


Delete selected entry.

Delete All


Delete all entries.




When you quit the call lists, all entries are set to the status "old", i.e. the next time you call the list up they will no longer be shown in bold.

Opening lists with the message key

You can use the message key  to open the following list selection:

- ◆ Network mailbox, if your network provider supports this function and fast access is set for the network mailbox (→ page 34)
- ◆ Incoming SMS message list (dependent on base)
- ◆ List of missed calls
- ◆ List of missed appointments (→ page 37)

An advisory tone sounds as soon as a **new message** arrives in a list. The  key flashes (it goes off when the key is pressed). In **idle status**, the display shows an icon for the new message:

Icon	New message...
	... on the (network) mailbox
	... in the missed call list
	... in the Missed Alarms list


The number of new entries is displayed on the right next to the corresponding symbol.





Please note


If calls are saved in the network mailbox, you will receive a message if the appropriate settings have been made (see your network provider user guide).

List selection

The lists displayed after pressing the message key  depend on whether there are any new messages.

- ◆  **key does not flash**
(no new messages):
You will see all the lists containing messages and the network mailbox.
- ◆  **key flashes**
(new messages received):
You will see all the lists with **new** messages. If only one list contains new messages, this will be opened automatically.

Lists with new messages appear at the top and are indicated by a bold font:



Select a list with . To open, press **OK**.

Using the network mailbox

The network mailbox is your network provider's answering machine within the network. You cannot use the network mailbox unless you have **requested** it from your network provider.



Configuring fast access for the network mailbox

With fast access, you can dial the network mailbox directly.

Fast access is set for the network mailbox. You only need to enter the number of the network mailbox.

Configuring fast access for the network mailbox and entering the network mailbox number

For bases **with** answering machines:

 →  → Set Key 1


Network Mailbox

Select and press **Select**
(● = selected).

For bases **without** answering machines:

 →  → Network Mailbox


To continue:



 Enter the number for the network mailbox.

Save Press the display key.

The setting for fast access applies to all Gigaset SL78H handsets.

Calling the network mailbox

 Press and **hold**. You are connected straight to the network mailbox.

 Press speaker key  if required. You will hear the network mailbox announcement.

Viewing the network mailbox report

When a message is recorded, you receive a call from the network mailbox. If you have requested Calling Line Identification, the network mailbox number will be displayed. If you take the call, the new messages are played back. If you do not take the call, the network mailbox number will be saved in the missed call list and the message key flashes (→ page 32).

ECO DECT

You are helping to protect the environment with your Gigaset SL78H.

Reducing energy consumption

By using a power-saving adapter plug, your telephone consumes less power.

Reducing radiation (dependent on base)

The radiation can only be reduced if your base supports this function.

The transmission power of your telephone is **automatically** reduced depending on the distance to the base.

You can reduce the radiation of the handset and base even further by using **Eco Mode** or **Eco Mode+**. For further information, please refer to your base user guide.

Setting an appointment (calendar)

You can use your handset to remind yourself of up to 30 appointments. Anniversaries (→ page 30) entered in the directory are automatically recorded in the calendar.



You can set whether or not the graphic calendar is to be displayed in idle status. To do this from idle status:


Calendar → **Options** → **Show cal. in idle**
(☑ = display)

Press **Change** to activate/deactivate the function (☑ = on).

Saving an appointment

Precondition: The date and time have already been set (→ page 12).

 →  → **Calendar**



- ◆ The current day is selected (highlighted in orange).
- ◆ Days on which appointments have already been saved are highlighted in orange.



Select the required day in the graphic calendar.

The selected day is highlighted in orange. The current day is highlighted in white.



Press the middle of the control key.

- ◆ If appointments have already been entered, this will open the list of saved appointments for the day.
Use **<New Entry>** → **OK** to open the window for data input.
- ◆ If no appointments have been entered, the data entry window will open immediately to add the new appointment.
- ▶ Change multiple line input:

Appointment:

Select **On** or **Off**.

Date:

Enter day/month/year in 8-digit format.

Time:

Enter hours/minutes in 4-digit format.

Setting an appointment (calendar)

Text:

Enter text (max. of 16 characters). The text appears as the appointment name in the list and will be displayed on the screen during the appointment reminder. If you do not enter any text, only the date and time of the appointment are displayed.


Save Press the display key.

Please note

If you have already saved 30 appointments, you must delete an existing appointment before you can enter a new one.

Signalling of appointments and anniversaries

In idle status, an appointment reminder will be signalled for 60 seconds using the selected ring tone (→ page 44). The name is displayed for anniversaries, while the entered text is displayed for appointments along with the date and time.



You can either answer the appointment reminder or switch it off (depending on the base):

Off Press the display key to deactivate the appointment reminder.



Or (depending on the base):

SMS Press the display key to accept the appointment reminder with an SMS.




Please note

During a call, the appointment reminder is signalled by a short tone.

Managing appointments

 →  → **Calendar**

Editing individual appointments

 /  Select the day in the graphic calendar and press the  control key. (Days on which appointments have already been saved are highlighted in orange in the calendar).

 Select appointment for the day.

You have the following options:

View Select the display key and edit or confirm the entry.

Or:

Options Open the menu for editing, deleting and activating/deactivating.

Deleting all appointments

In the monthly view:


Options → **Delete all appoint.** → **OK**

Confirm the security prompt with **Yes**. All appointments are deleted.


Displaying missed appointments, anniversaries

Missed appointments/anniversaries (→ page 30) are displayed in the **Missed Alarms** list if:

- ◆ You do not accept an appointment/anniversary.
- ◆ The appointment/anniversary was signalled during a phone call.
- ◆ The handset is deactivated at the time of the appointment/anniversary.

The symbol  and the number of **new** entries are indicated in the display. The most recent entry is at the head of the list.

Open the list by pressing the **message key**

 (→ page 32) or via the **menu**:

 →  → **Missed Alarms**

Select appointment/anniversary.

Information about the appointment/anniversary is displayed. A missed appointment is displayed with the appointment name and a missed anniversary is displayed with the last name and first name. The date and time will also be given.

Delete

Delete appointment

SMS

Write an SMS (depending on base).

If 10 entries are already stored in the list, the next appointment reminder will delete the oldest entry.

Setting the alarm clock

Precondition: The date and time have already been set (→ page 12).

Activating/deactivating the alarm clock and setting the wake-up time

 →  → **Alarm Clock**

▶ Change multiple line input:

Activation:

Select **On** or **Off**.

Time:

Enter the wake-up time in 4-digit format.

Occurrence:

Select **Daily** or **Monday-Friday**.

Volume:


Set the volume (1–6).

Melody:

Select melody.

Save

Press the display key.

The  symbol and wake-up time are displayed in idle status.

A wake-up call with the selected ring tone is signalled on the handset (→ page 2). The wake-up call sounds for 60 seconds. If no key is pressed, the wake-up call is repeated twice at five minute intervals and then turned off.

During a call, the wake-up call is only signalled by a short tone.

Deactivating the wake-up call/repeating after a pause (snooze mode)

Precondition: A wake-up call is sounding.

Off

Press the display key. The wake-up call is deactivated.

or

Snooze

Press the display key or any key. The wake-up call is deactivated and then repeated after 5 minutes. After the second repetition the wake-up call is deactivated completely.

Using a handset as a room monitor

If the room monitor is activated, a previously saved destination number is called as soon as a set noise level is reached. You can save an internal or external number in your handset as the destination number. All of the handset keys are deactivated, with the exception of the display keys.

The room monitor call to an external number stops after around 90 seconds. The room monitor call to an internal number (handset) stops after approx. 3 minutes (depending on the base). When the room monitor is activated, all keys are locked except the end call key. The handset's speaker is muted.

When the room monitor is activated, incoming calls to the handset are indicated **without a ring tone** and are only shown on the screen. The display and keypad are not illuminated and advisory tones are also turned off.

If you accept an incoming call, the room monitor is suspended for the duration of the call, but the function **remains** activated.

If you deactivate then reactivate the handset, the room monitor remains activated.

Warning!

- ◆ You should always check the operation of the room monitor before use. For example, test its sensitivity. Check the connection if you are diverting the room monitor to an outside number.
- ◆ When the function is switched on, the handset's operating time is considerably reduced. If necessary, place the handset in the charging cradle. This ensures that the battery does not run down.
- ◆ Ideally the handset should be positioned 1 to 2 metres away from the baby. The microphone must be directed towards the baby.
- ◆ The connection to which the room monitor is forwarded must not be blocked by an activated answering machine.

Activating the room monitor and entering the destination number

 →  → Room Monitor


- ▶ Change multiple line input:

Activation:

Select **On** to activate.

Alarm to:

Select **Internal** or **External**.

External number: Select the number from the directory (press display key ) or enter it directly.

Internal number: Press the **Change** display key → select handset or **Call All**, if all registered handsets are to be called → **OK**.


The destination number or the internal destination number is displayed in the idle display.

Sensitivity:

Select noise level sensitivity (**Low** or **High**).

- ▶ Press **Save** to save the settings.

When the room monitor is activated, the idle display appears as follows:



Changing the set destination number

→ → Room Monitor

- ▶ Enter and save number as described in "Activating the room monitor and entering the destination number" (→ page 38).

Cancel/deactivate room monitor

Press the end call key to cancel the call when the **room monitor is activated**.

In the **idle status** press the display key **Off** to deactivate the room monitor mode.

Deactivating the room monitor remotely

Preconditions: The phone must support touch tone dialling and the room monitor should be set for an external destination number.

- ▶ Accept the call from the room monitor and press keys .

The room monitor function will deactivate after the call ends. There will be no further room monitor calls. All other room monitor settings (e.g. no ring tone) on the handset are retained until you press the display key **Off** on the handset.

To reactivate the room function with the same phone number:

- ▶ Turn on the activation again and save with **Save** (→ page 38).

Using Bluetooth devices

Your Gigaset SL78H handset can communicate wirelessly via Bluetooth™ with other devices using this technology.

Before you can use your Bluetooth devices, you must first activate Bluetooth and then register the devices to the handset.

You can register 1 Bluetooth headset to the handset. You can also register up to 5 data devices (PC, PDA) to send and receive directory entries as vCards or exchange data with the computer (→ page 52).

Area codes (international and local area codes) must be saved on the phone to use the numbers again (→ page 46).

You will find a description of how to operate your Bluetooth devices in the user guides for these devices.

Please note

- ◆ You can operate headsets on your handset that have the **headset** or **speaker profile**. Where both profiles are available, the speaker profile is used for communication.
- ◆ It can take up to 5 seconds to create a connection between your handset and a Bluetooth headset. This applies both when a call is accepted using the headset or transferred to the headset, and when a number is dialled from the headset.

Activating/deactivating Bluetooth mode

→ → Activation

Press **Change** to activate or deactivate Bluetooth mode (= activated).

In idle status, the icon shows that Bluetooth mode is activated (→ page 2).

Registering Bluetooth devices

The distance between the handset in Bluetooth mode and the activated Bluetooth device (headset or data device) should be no more than 10 m.

Please note

- ◆ If you register a headset, any headset that is already registered will be overwritten.
- ◆ If you would like to use a headset with your handset that is already registered to another device (e.g. to a mobile phone), please **deactivate** this connection before you start the registration process.

→ → Search for Headset / Search for Data Device

The search can take up to 30 seconds.

Once the device has been found, its name will be shown on the display.

Options Press the display key.

Trust Device

Select and press **OK**.



Enter the PIN for the Bluetooth device you want to **register** and press **OK**.

Please note

- ◆ Enter a PIN of your choice for the **data device**. Then confirm the PIN on the data device.
- ◆ Enter the preset PIN for the **headset** (usually: **0000**). For further information, please refer to the headset manufacturer's user guide.

The device is saved in the list of known devices.

Cancelling/repeating current search

To cancel search:

Cancel Press the display key.

Repeat search if necessary:

Options Press the display key.

Repeat Search



Select and press **OK**.


Editing the list of known (trusted) devices

Open list

 →  → **Known Devices**

A corresponding icon appears next to each device name in the list displayed:

Icon	Meaning
	Bluetooth headset
	Bluetooth data device

If a device is connected, the display header indicates the corresponding symbol instead of .

Viewing entries

Open list →  (select entry)

Options Press the display key.

View Entry Select and press **OK**.

Device name and address are displayed.

Back with **OK**.

Deregistering Bluetooth devices

Open list →  (select entry)

Options Press the display key.

Delete Entry Select and press **OK**.

Please note

If you deregister an activated Bluetooth device, it may try to reconnect as an "unregistered device".

Changing the name of a Bluetooth device

Open list →  (select entry)

Options Press the display key.

Edit Name Select and press **OK**.



Change the name.

Save

Press the display key

Rejecting/accepting an unregistered Bluetooth device

If a Bluetooth device that is not registered in the list of known devices tries to connect with the handset, you will be prompted on the display to enter the PIN for the Bluetooth device (bonding).

◆ Reject

Back Press the display key.

◆ Accept



Enter the PIN for the Bluetooth device you want to **accept** and press **OK**.



If you have accepted the device, you can use it temporarily (i.e. as long as it is within receiving range or until you deactivate the handset) or save it to the list of known devices.

Once the PIN has been confirmed, save to the list of known devices:

- **Yes** Press the display key.
- **No** Press the display key: use temporarily.

Changing the Bluetooth name of the handset

You can change the handset name used to identify it on the display of another Bluetooth device.

 →  → **Own Device**

Change Press the display key



Change the name.




Save

Press the display key

Handset settings

Your handset is preconfigured, but you can change the settings to suit your individual requirements.

Quick access to functions and numbers

You can assign a number or a function to each of the digit keys  and  to .

The left and right display keys have functions pre-selected by default. You can change the assignment (→ page 42).

The number is then dialled or the function started by simply pressing a key.

Assigning digit keys

Precondition: You have not yet assigned a number or function to the digit key.

▶ **Press and hold** the digit key.

The list of possible key assignments is opened. The following can be selected:

Quick Dial / Call-by-Call

Assign key to a number from the directory or call-by-call list.

The directory or call-by-call list is opened.

▶ Select an entry and press **OK**.

If you delete or edit an entry in the directory or call-by-call list, this has no effect on the assignment to the digit/display key.

Room Monitor

Assign menu for setting and activating the room monitor to a key (→ page 38).

Alarm Clock

Assign menu for setting and activating the alarm clock to a key (→ page 37).

Calendar

Open calendar/enter new appointment.

Bluetooth

Assign the Bluetooth menu to a key.

Handset settings

Redial

Display the redial list.

More Functions...

Depending on your base, further key assignments are also possible.

Starting the function, dialling the number

Press and **hold** the digit key in the idle status of the handset, or **briefly** press the display key.

Depending on the key assignment:

- ◆ Numbers are dialled directly.
- ◆ The function menu is opened.

Changing key assignments

Display key

- ▶ Press and **hold** the left or right display key.

The list of possible key assignments is opened.

- ▶ Proceed as described when assigning functions to the digit keys (→ page 41).

The selected function or name of the phone number in the directory or call-by-call list is displayed (abbreviated if necessary) in the bottom display line above the display key.

Digit key



- ▶ **Briefly** press the digit key.


Change Press the display key. The list of possible key assignments is displayed.

- ▶ Proceed as is described when first assigning the key (→ page 41).

Changing the display language

You can view the display texts in different languages.

 →  → **Language**


The current language is indicated by a .

 Select language and press **Select**.

If you accidentally choose a language you do not understand:

 →  →  →  → 

Press the keys one after the other and confirm using **OK**.


 Select the correct language and press the **right display key**.

Setting the display

Setting the screensaver

When in idle status, a picture, a Slideshow (all the pictures are displayed one after the other) in the **Screensavers** folder of the Resource Directory (→ page 45) or the time can be displayed as a screensaver. This will replace the idle status display and it may conceal the calendar, date, time and name.

The screensaver is not displayed in certain situations, e.g. during a call or if the handset is deregistered.

If a screensaver is activated, the menu option **Screensaver** is marked with .

 →  → **Display** → **Screensaver**

The current setting is displayed.




- ▶ Change multiple line input:

Activation:

Select **On** (screensaver is displayed) or **Off** (no screensaver).

Selection:

Select screensaver or





View  press the display key. The active screensaver is displayed. Select screensaver and press **OK**.**Save**  Press the display key.If the screensaver covers the display, **briefly press**  to show the idle display.**Please note**If the **analogue clock** has been set as screensaver, the **second hand** is shown only when the handset is in the **charger**.**Setting the display backlight**

Depending on whether or not the handset is in the charging cradle, you can activate or deactivate the backlight. If it is activated, the display is permanently dimmed. If the backlight is deactivated it is switched on by pressing any key. In this case the pressed key has no other function.

 →  → **Display** → **Backlight**






The current setting is displayed.

▶ Change multiple line input:




In ChargerSelect **On** or **Off**.**Out of Charger**Select **On** or **Off**.**Please note**With the **On** setting, the standby time of the handset can be significantly reduced.**Save**  Press the display key.**Activating/deactivating auto answer**If you activate this function, when you receive a call you can simply lift the handset out of the charging cradle without having to press the talk key . →  → **Telephony** → **Auto Answer****Change**  Press the display key ( = on).**Changing the speaker/earpiece volume**

You can set the loudspeaker volume for speaker talking and the earpiece volume to five different levels.

In idle status:

 Open the menu for setting the handset volume. Set the earpiece volume. Scroll to the **Speaker** line. Set the speaker volume.**Save**  Press display key if necessary to save the setting permanently.

Setting the volume during a call:

 Press the control key. Select volume.The setting will automatically be saved after approx. 3 seconds, if not then press the display key **Save**.If  is assigned to another function, e.g. toggling:**Options**  Open menu.**Volume**  Select and press **OK**.



Configure setting (see above).

Please note

You can also set the call volume using the menu (→ page 23).

Changing ring tones

◆ **Volume:**

You can choose between five volumes (1–5; e.g. volume 3 = ) and the "crescendo" ring (6; volume increases with each ring = .

◆ **Ring tones:**

You can select various ring tones, melodies or any sound from the resource directory (→ page 45).


You can set different ring tones for the following functions:


- ◆ **Extern. Calls:** for external calls
- ◆ **Intern. Calls:** for internal calls
- ◆ **Appts:** for set appointments (→ page 35)


Set the volume and melody depending on the type of signalling required.

In idle status:

 →  → **Audio Settings** → **Ringer Settings**

 Select setting, e.g. **Extern. Calls**, and press **OK**.

 Set volume (1–6).

 Scroll to the next line.

 Select melody.

Save Press the display key to save the setting.

Additionally for external calls:

After entering a ring tone, you can select a period of time during which your telephone is not to ring, e.g. at night.

Time Control:

Select **On** or **Off**.

Mute ring tone from:

Enter the start of the period in 4-digit format.

Mute ring tone until:

Enter the end of the period in 4-digit format.


Please note

Your telephone will ring during this time period for callers to whom you have assigned your own melody in the directory (VIP).

Activating/deactivating the ring tone


You can deactivate the ring tone on your handset before you answer a call or when the handset is in idle status; the ring tone can be deactivated permanently or only for the current call. The ring tone cannot be re-activated while an external call is in progress.

Deactivating the ring tone permanently

 Press and **hold** the star key.

The  icon appears in the display.

Reactivating the ring tone


 Press and **hold** the star key.

Deactivating the ring tone for the current call


Silence Press the display key.

Activating/deactivating the alert tone

In place of the ring tone you can activate an alert tone. When you get a call, you will hear a **short tone** ("Beep") instead of the ring tone.

 Press and **hold** the star key and **within 3 seconds:**

Beep Press the display key. A call will now be signalled by **one** short alert tone.

The  icon appears in the display.

Resource directory

The resource directory on the handset manages sounds, which you can use as ring tones, and pictures (CLIP pictures and screensavers), which you can use as caller pictures or as screensavers. Precondition: Calling Line Identification (CLIP). The resource directory can manage the following media types:



Sound	Format
Ring tones	Standard
Monophonic	Standard
Polyphonic	Standard
Imported sounds	WMA, MP3, WAV
Picture – CLIP picture – Screensaver	BMP, JPG, GIF 240 x 120 pixels 240 x 320 pixels

The icon is displayed in front of the name in the resource directory. Various mono and polyphonic sounds and pictures are preconfigured on your handset.


You can listen to the available sounds and view the pictures.

You can download pictures and sounds from a PC (→ page 52). If there is not enough memory available, you must first delete one or more pictures or sounds.

Playing back sounds/viewing CLIP pictures


 →  → Resource Directory
→ Screensavers / Caller Pictures / Sounds (select entry)

Pictures:

View Press the display key. The selected picture is displayed. Switch between pictures using the  key.


If you have saved a picture in an invalid file format, you will see an error message after selecting the entry.

Sounds:

The selected sound is played back immediately. Switch between the sounds using the  key.

You can set the volume during playback.

Volume Press the display key.

 Set volume.

Save Press the display key.

Deleting/renameing a picture/sound

You have selected an entry.

Options **Open menu.**

If a picture/sound cannot be deleted, these options are not available. You can select the following functions:

Delete Entry

The selected entry is deleted.

Edit Name

Change the name (max. 16 characters) and press **Save**. The entry is stored with the new name.

Checking the memory

You can check how much memory is available for sounds and pictures.

 →  → Resource Directory
→ Capacity

Activating/deactivating advisory tones

Your handset uses advisory tones to tell you about different activities and statuses. The following advisory tones can be activated/deactivated independently of each other:

- ◆ **Key click:** every key press is confirmed.
- ◆ **Acknowledge tones:**
 - **Confirmation tone** (ascending tone sequence): at the end of an entry/setting and when a new entry arrives in the call list
 - **Error tone** (descending tone sequence): when you make an incorrect entry
 - **Menu end tone:** when scrolling to the end of a menu
- ◆ **Battery low beep:** the battery requires charging.

In idle status:

 →  → **Audio Settings** → **Advisory Tones**

▶ Change multiple line input:

Key Tones:


Select **On** or **Off**.

Confirmation:

Select **On** or **Off**.

Battery:

Select **On**, **Off** or **In Call**. The battery warning tone is only activated/deactivated and only sounds during a call.

 Press the display key.

Setting your own area code

In order to transfer phone numbers (e.g. in vCards), it is essential that your area code (international and local area code) is saved on the phone.

Some of these numbers are already preset.


 →  → **Telephony** → **Area Codes**


Check that the (pre)set area code is correct.


▶ Change multiple line input:

 Select/change input field.

 Navigate in the input field.

 If necessary, delete number: press the display key.

 Enter number.

 Press the display key.

Example:




Restoring the handset default settings

You can reset individual settings and changes that you have made.

The following settings are **not** affected by the reset

- ◆ Registration of the handset to the base
- ◆ Date and time
- ◆ Calendar entries
- ◆ Entries in the directory, call-by-call list, call lists and the content of the resource directory

 →  → **Reset** → **Handset Reset**

 Press the display key.

Customer Service & Assistance

You have questions? As a Gigaset customer, you can take advantage of our comprehensive service offerings. You can find help quickly in this **User Manual** and in the **service pages of our Gigaset online portal**.

Please register your phone right after purchase on www.gigaset.com/ru/service

thus enabling us to provide you even better service in case of questions or in case of a warranty claim. Your personal user account enables you to directly contact our customer service by email

In our constantly updated online service on www.gigaset.com/ru/service you can find:

- ◆ Extensive information about our products
- ◆ FAQ compilations
- ◆ Keyword search to help find topics quickly
- ◆ Compatibility database: Find out which base stations and handsets can be combined.
- ◆ Product comparison: Compare the features of several products with each other.
- ◆ Downloads for user manuals and current software updates
- ◆ E-mail contact to our customer service

Our service representatives are available on the **telephone** for more advanced questions or in-person consultation.

Customer Service for Moscow

+8 (495) 2281312

(free of charge for fixed line Moscow users. For calls from mobile phone networks, other prices may apply.)

Please note that if the Gigaset product is not sold by authorized dealers in the national territory the product may not be fully compatible with the national telephone network. It is clearly mentioned on the box near to the CE mark as well as on the bottom of the base station for which country/countries the equipment has been developed for. If the equipment is used in a manner inconsistent with this advice, with the instructions of the manual and on the product itself, this may have implications on the conditions for warranty or guarantee claims (repair or exchange of product).

In order to make use of the warranty, the product purchaser is asked to submit a receipt which proves the date of purchase (date from which the warranty period starts) and the type of goods that have been purchased.


Questions and answers

If you have any questions about using your phone, visit us at www.gigaset.com/customercare at any time. The table below contains a list of common problems and possible solutions.

Registration or connection problems with a Bluetooth headset.

- ▶ Reset the Bluetooth headset (see the user guide for your headset).
- ▶ Delete registration data from the handset when deregistering the device (→ page 40).
- ▶ Repeat the registration process (→ page 40).

The display is blank.

1. The handset is not switched on.
 - ▶ Press and **hold** the end call key .
2. The battery is flat.
 - ▶ Charge the battery or replace it (→ page 8).

No Base flashes in the display.

1. The handset is outside the range of the base.
 - ▶ Move the handset closer to the base.

The range of the base is reduced because eco mode is activated.

 - ▶ Deactivate eco mode (→ page 35) or reduce the distance between the handset and the base.
2. The base is not turned on.
 - ▶ Check the base mains adapter.

"Please register handset" flashes in the display.

Handset has not yet been registered to the base or has been de-registered.

- ▶ Register the handset (→ page 10).

Handset does not ring.

The ring tone is deactivated.

- ▶ Activate the ring tone (→ page 44).

The other party cannot hear you.

You have pressed the **Mute** display key. The handset is "muted".

- ▶ Activate the microphone again (→ page 26).

You will hear an error tone when inputting (descending tone sequence).

Action has failed/invalid input.

- ▶ Repeat the operation.
 - ▶ Watch the display and refer to the user guide if necessary.

Exclusion of liability

Some displays may contain pixels (picture elements), which remain activated or deactivated. As a pixel is made up of three sub-pixels (red, green, blue), it is possible that pixel colours may vary.

This is completely normal and does not indicate an error.

Authorisation

This device is intended for use within the European Economic Area and Switzerland. If used in other countries, it must first be approved nationally in the country in question.

Replacement or repair services are not offered in countries where our product is not sold by authorised dealers.

We, Gigaset Communications GmbH, declare that this device meets the essential requirements and other relevant regulations laid down in Directive 1999/5/EC.

A copy of the 1999/5/EC Declaration of Conformity is available at this Internet address: www.gigaset.com/docs

 **0682**

Certificate No
POCC DE.MJ05.B00821
valid till 26.10.2011.

Postal address of manufacturer:
Gigaset Communications GmbH,
Hofmannstrasse 61, 81379, Munich,
Germany.

Bluetooth Qualified Design Identity

The Bluetooth QD ID for your Gigaset SL78H is: B013322.

Environment

Our environmental mission statement

We, Gigaset Communications GmbH, carry social responsibility and are actively committed to a better world. Our ideas, technologies and actions serve people, society and the environment. The aim of our global activity is to secure sustainable life resources for humanity. We are committed to a responsibility for our products that comprises their entire life cycle. The environmental impact of products, including their manufacture, procurement, distribution, use, service and disposal, are already evaluated during product and process design.

Further information on environmentally friendly products and processes is available on the Internet under www.gigaset.com.

Environmental management system



Gigaset Communications GmbH is certified pursuant to the international standards EN 14001 and ISO 9001.

ISO 14001 (Environment): certified since September 2007 by TÜV SÜD Management Service GmbH.

ISO 9001 (Quality): certified since 17/02/1994 by TÜV Süd Management Service GmbH.

Ecological energy consumption

The use of ECO DECT (→ page 35) saves energy and is an active contribution towards protecting the environment.

Disposal

Batteries should not be disposed of in general household waste. Observe the local waste disposal regulations, details of which can be obtained from your local authority.

All electrical and electronic equipment must be disposed of separately from general household waste using the sites designated by local authorities.



If a product displays this symbol of a crossed-out rubbish bin, the product is subject to European Directive 2002/96/EC.

The appropriate disposal and separate collection of used equipment serve to prevent potential harm to the environment and to health. They are a precondition for the re-use and recycling of used electrical and electronic equipment.

For further information on disposing of your used equipment, please contact your local authority, your refuse collection service.

Appendix

Caring for your telephone

Wipe the charger and handset with a **damp cloth** (do not use solvent or a microfiber cloth) or an **antistatic cloth**.

Never use a dry cloth as this can cause static.

Contact with liquid

If the handset should come into contact with liquid:

1. **Switch the handset off and remove the battery immediately.**
2. Allow the liquid to drain from the handset.
3. Pat all parts dry, then place the handset with the battery compartment open and the keypad facing down in a dry, warm place **for at least 72 hours** (not in a microwave, oven etc.).
4. **Do not switch on the handset again until it is completely dry.**

When it has fully dried out, you will usually be able to use it again.

Specifications

Recommended batteries

Technology: Lithium ion (Li-Ion):

Voltage: 3.7 V

Capacity: 750 - 830 mAh

Type: V30145-K1310-X444
V30145-K1310-X445

The handset is supplied with the recommended battery. Only an original battery may be used.

Due to the constant progression in battery development, the list of recommended batteries in the FAQ section of the Gigaset Customer Care pages is regularly updated:

www.gigaset.com/customer-care

Handset operating times/charging times

The operating time of your Gigaset depends on the capacity and age of the batteries and the way they are used. (All times are maximum possible times).

	Capacity (mAh) approx. 800
Standby time (hours)*	200/55
Talktime (hours)	14
Operating time for 1.5 hrs of calls per day (hours)**	120
Charging time in charger (hours)	3,0

* without/with display backlight

**without display backlight


(Setting the display backlight → page 43)

Writing and editing text

The following rules apply when writing text:

- ◆ Each key between and is assigned several letters and characters.
- ◆ Control the cursor with . Press and **hold** or to move the cursor **word by word**.
- ◆ Characters are inserted to the left of the cursor.
- ◆ Press the star key to show the table of special characters. Select the required character, press the display key **Insert** to insert the character at the cursor position.
- ◆ Press and **hold** to to enter digits.
- ◆ Press display key to delete the **character** to the left of the cursor. Press and **hold** to delete the **word** to the left of the cursor.
- ◆ The first letter of the name of directory entries is automatically capitalised, followed by lower case letters.

Setting predictive text, upper/lower case or digits

Repeatedly press the hash key  to change the text input mode.

T9Abc	Upper case * with predictive text
T9abc	Lower case with predictive text
123	Writing digits
Abc	Upper case *
abc	Lower case

* 1. letter in capitals, all others in lower case

The active mode is indicated at the top right of the screen.

Writing an SMS (dependent on base)/name (without predictive text)













Predictive text is not activated in "Abc", "abc" or "123" mode.

- ▶ Enter the individual letters/characters by pressing the corresponding key.

The characters assigned to the key are shown in a selection line at the bottom left of the screen. The selected character is highlighted.

- ▶ **Briefly** press the key several times in succession to select the required letter/character.

Standard characters

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x
			1							
	a	b	c	2	ä	á	à	â	ã	ç
	d	e	f	3	ë	é	è	ê		
	g	h	i	4	ï	í	ì	î		
	j	k	l	5						
	m	n	o	6	ö	ñ	ó	ò	ô	õ
	p	q	r	s	7	ß				
	t	u	v	8	ü	ú	ù	û		
	w	x	y	z	9	ÿ	ý	æ	ø	å
	.	,	?	!	0					

- 1) Space
- 2) Line break

Cyrillic

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x
			1							
	а	б	в	г	2	а	б	с		
	д	е	ё	ж	з	3	д	е	ф	
	и	й	к	л	4	г	h	i		
	м	н	о	5	ж	к	л			
	п	р	с	6	м	н	о			
	т	у	ф	х	7	р	q	r	s	
	ц	ч	ш	щ	ъ	8	t	u	v	
	ы	ь	э	ю	я	9	w	x	y	z
	.	,	?	!	0					

- 1) Space
- 2) Line break

Writing an SMS (with predictive text, dependent on base)



T9 predictive text helps you when you are writing text messages. The input language must be set.

T9 is activated in "T9Abc" or "T9abc" mode (→ page 50).

- ▶ Enter all the characters of a word by pressing the corresponding key once. Enter the whole word.

T9 searches the internal dictionary for matching entries. If the list contains at least one entry, this will be displayed; if there is more than one entry, the first will be displayed. The suggested word is highlighted in colour in the text field.



- ▶ To scroll through all the existing words, repeatedly press the display key **Sel. Word**.
- ▶ Press  or  or enter a special character (e.g. space, comma, full stop) to confirm the required word.

If the entry is not saved in the dictionary or the required word cannot be found when scrolling through, the highlighting in the text field will switch to an empty character string. The note "Spell Word" will be displayed at the bottom left of the display.



- ▶ In this case, enter the word one character at a time (→ page 51) and confirm the entry as described.

The general rules for creating text apply when entering digits and special characters and controlling the cursor (→ page 50).

Additional functions via the PC interface

You can connect the handset to your computer via Bluetooth (→ page 39) or via the USB data cable supplied. If you want to use the Bluetooth connection, your computer must be equipped with a suitable dongle. To be able to communicate via the USB interface, you must install the driver software from the supplied CD before connecting the USB data cable (→ page 14).

The program "**Gigaset QuickSync**" must be installed on your computer for your handset to communicate with your computer (free download from www.gigaset.com/gigasetst1780).

Please note

- ◆ If the USB data cable is plugged in, a Bluetooth connection cannot be established.
- ◆ If the enclosed USB data cable is plugged in during an existing Bluetooth connection, the Bluetooth connection is cancelled.

Transfer data

You can

- ◆ synchronise your handset directory with Outlook,
- ◆ download CLIP pictures (.bmp) from the computer to the handset,
- ◆ download pictures (.bmp) as a screen-saver from the computer to the handset
- ◆ download sounds (ring tones) from the computer to the handset.

During the transfer of data between handset and PC, you will see **Data transfer in progress** on the display. During this time the keypad is disabled, and incoming calls will be ignored.



Completing a firmware update

- ▶ Connect your telephone and PC using the **USB data cable** (→ page 14) supplied.
- ▶ Start the "**Gigaset QuickSync**" program on the PC.
- ▶ Set up the connection to the handset.
- ▶ Open the [Device] tab via [Settings] → [Device properties]
- ▶ Click on [Firmware update]

The firmware update starts.

The update procedure can take up to 10 minutes (excluding download time). **Do not interrupt the procedure. Do not remove the USB data cable.**

Data is first loaded from the update server via the Internet. The time required for this depends on the speed of your Internet connection.

Your telephone display is switched off, and the messages key  and the speaker key  flash.



Once the update is complete, your telephone automatically restarts.


Procedure in the event of an error





If the update procedure fails or your phone does not work properly following the update, repeat the update procedure as follows:

- ▶ Close the "**Gigaset QuickSync**" program on the PC.
- ▶ Remove the USB data cable from the telephone.
- ▶ Remove the battery (→ page 9).
- ▶ Replace the battery.
- ▶ Complete the firmware update as described.

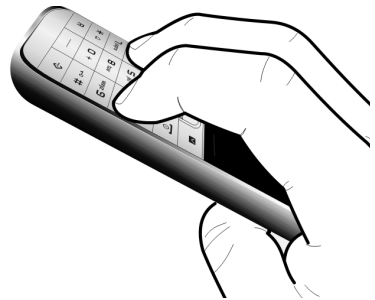If the update procedure fails several times or you can no longer connect to the PC, proceed as follows:

- ▶ Close the "**Gigaset QuickSync**" program on the PC.
- ▶ Remove the USB data cable from the telephone.
- ▶ Remove the battery (→ page 9).
- ▶ Press and hold keys  and  with the index and middle finger.



- ▶ Replace the battery.
- ▶ Release keys  and . The message key  and the speaker key  will flash alternately.
- ▶ Complete the firmware update as described.

Accessories

Ordering Gigaset products

You can order Gigaset products from your specialist retailer.



Only use original accessories. This will avoid possible health risks and damage to property, and also ensure that all the relevant regulations are complied with.

Index

A

- Accepting a call and Calling line identifica-
tion (Russian AON or CallerID) 24
- Accessories 54
- Acknowledge tones 46
- Activating
 - advisory tones 46
 - appointment 35
 - call acceptance 43
 - handset 19
 - keypad lock 19
 - room monitor 38
- Advisory tones 46
- Alarm clock 37
- Alert tone 44
- Anniversary 30
 - deactivating 30
 - display missed 37
 - missed 37
 - saving in directory 30
- Appointments 35
 - activating/deactivating 36
 - deleting 36
 - display missed 37
 - managing 36
- Area code
 - setting own area code 46
- Assigning a number key 41
- Authorisation 48
- Auto answer 25, 43

B

- Battery
 - charging 1, 2, 11
 - display 1, 2
 - icon 1, 2, 14
 - inserting 8
 - recommended batteries 50
 - tone 46
- Birthday, see Anniversary

Bluetooth

- accepting a call 25
- activating 39
- changing device name 41
- deregistering devices 40
- list of known devices 40
- registering devices 40
- setting own area code 46
- transferring directory (vCard) 30

C

- Calendar 35
- Call
 - accepting (Bluetooth) 25
 - ending 24
 - external 24
 - internal 26
 - length 24
 - list 31
- Call acceptance 43
- Call-by-call 27
 - numbers 27, 29
- Call-by-call list key 1
- Calling
 - external 24
 - internal 26
- Caring for your telephone 49
- Changing
 - destination number 39
 - device name (Bluetooth) 41
 - display language 42
 - earpiece volume 43
 - ring tone 44
 - speaker volume 43
- Character set 51
- Charge status display 1, 2
- CLIP picture 28, 45
- Confirmation tone 46
- Control key 1, 16
- Correcting incorrect entries 17
- Customer Care 47
- Customer Service & Assistance 47

Index

D

Deactivating	
advisory tones	46
appointment	35
call acceptance	43
handset	19
keypad lock	19
room monitor	39
Delete key	17
Deleting	
characters	17
Deregistering devices (Bluetooth)	40
Destination number (room monitor)	38
Dialling	
call-by-call list	28
directory	28
quick dial	41
using quick dial keys	29
Directory	27
copying number from text	30
managing entries	28
opening	16
order of entries	28
saving anniversary	30
saving entry	27
sending entry/list to handset	29
transferring a vCard (Bluetooth)	30
using to enter numbers	30
Display	
backlight	43
changing display language	42
in idle status	18
memory (directory/call-by-call)	29
memory (resource directory)	45
missed appointments/anniversaries	37
network mailbox report	34
screensaver	42
setting	42
Display keys	1, 17
assigning	41
Disposal	49

E

Earpiece mode	26
Earpiece volume	43
ECO DECT	35
E-mail address	
copying from the directory	30
End call key	1, 24
Ending, call	24
Entry	
selecting from directory	28
Environment	49
Error tone	46

F

Fast access	
network mailbox	34
Firmware Update	53

G

General troubleshooting	48
Group call	26

H

Handset	
activating/deactivating	19
advisory tones	46
contact with liquid	50
display backlight	43
display language	42
earpiece volume	43
idle status	18
list	16
muting	26
registering	10
restoring to factory settings	46
screensaver	42
setting	41
setting up	8
speaker volume	43
using room monitor	38
Handset operating time	
in room monitor mode	38
Hash key	1, 19
Headset (Bluetooth)	39
Hearing aids	5
Help	48

- I**
- Icon
 - alarm clock 37
 - battery 14
 - display 17
 - for new messages 32
 - keypad lock 19
 - ring tone 44
 - Idle status (display) 18
 - Idle status, returning to 18
 - Incorrect input (correction) 17
 - Installing the base 7
 - Internal call 26
- K**
- Key 1 (fast access) 1
 - Keypad lock 19
 - Keys
 - Call-by-call list 1
 - control key 1, 16
 - delete key 17
 - display keys 1, 17
 - end call key 1, 24
 - fast access 1
 - hash key 1, 19
 - message key 1
 - on/off key 1
 - quick dial keys 29
 - recall key 1
 - speaker key 1
 - star key 1
 - talk key 1, 24
- L**
- Language, display 42
 - Last number redial 31
 - List 27
 - call list 31
 - call-by-call list 27
 - handsets 16
 - known devices (Bluetooth) 40
 - missed calls 31
 - SMS list 32
 - Lock
 - activating/deactivating keypad lock .. 19
- M**
- Mains adapter 5
 - Making calls
 - external 24
 - internal 26
 - Manual last number redial 31
 - Medical appliances 5
 - Memory
 - directory/call-by-call 29
 - resource directory 45
 - Menu
 - end tone 46
 - opening 16
 - overview 22
 - prompting 18
 - Message key 1
 - opening lists 32
 - Microphone 1
 - Missed
 - anniversary 37
 - appointment 37
 - calls 31
 - Muting the handset 26
- N**
- Network mailbox 34
 - Number
 - as destination for room monitor 38
 - copying from directory 30
 - copying to directory 30
 - entering with directory 30
 - saving in the directory 27
- O**
- On/Off key 1
 - Order in directory 28
- P**
- Pack contents 6
 - PC Interface 52
 - Picture
 - deleting 45
 - renaming 45
 - Picture CLIP 28, 45
 - Predictive text T9 52

Index

Q

- Questions and answers 48
- Quick dial..... 27, 41

R

- Range7
- Recall key.....1
- Registering
 - devices (Bluetooth)..... 40
 - handset 10
- Reminder call 31
- Resource directory 45
- Ring tone
 - changing..... 44
 - setting volume..... 44
- Room monitor 38

S

- Screensaver..... 42
- Searching in directory 28
- Sending
 - directory entry to handset 29
- Sensitivity (room monitor) 38
- Setting
 - date 12, 23
 - screensaver..... 42
 - time 12, 23
- Setting up
 - handset8
- Signal tone, see Advisory tones
- SMS list..... 32
- SMS list (depending on base)..... 31
- Snooze mode 37
- Sound, see Ring tone
- Speaker
 - key1
 - talking 26
- Specifications 50
- Star key1

T

- T9 (predictive text) 52
- Talk key 1, 24

U

- Update 53
- USB connection..... 14

V

- Viewing the network mailbox report... 34
- VIP (directory entry) 28
- Volume
 - earpiece..... 43
 - earpiece volume 43
 - handset speaker volume..... 43
 - loudspeaker 43
 - ring tone 44
 - setting 44

W

- Warning tone, see Advisory tones
- Writing an SMS (depending on base) ... 50
- Writing and editing text 50