

JVC®

The Perfect Experience / —

10" (9"V) COLOR MONITOR

TM-1051DG

Monitor with Dual SDI Inputs for Relay and Studio Applications

SDI

Serial Digital Interface



Compact yet rugged, the TM-1051DG is engineered for the professionals. For instance, the OSM (on-screen menu) contains a very extensive monitor set-up area where virtually every operational feature and function can be switched or adjusted to suit the most sophisticated and wide-ranging of viewing requirements

- Dual SDI Inputs
- Audio Level Meter
- Two Audio Outputs
- Compact Design for Rack Mounting
- Safe Area Marker
- Aspect Ratio Select
- Underscan
- Color Adjustment
- Two-color Tally Lamp
- Wired Remote

Packing the Power Demanded by Today's Broadcast and Production Professionals

Dual SDI Inputs

Dual SDI inputs with embedded audio are available. SDI inputs are compatible with 480/60i and 576/50i signals.

Audio Level Meter

For extra convenience, SDI input enables display of an on-screen audio level meter. Remotely switchable by RJ-45 trigger.

Two Audio Outputs

Two audio output connectors are provided for embedding digital audio into digital video streams, which are then converted and output as analog audio.

Compact Design for Rack Mounting

Thanks to the 5U height specifications, rack mounting of the TM-1051DG is possible individually or two monitors side by side on any EIA 19" rack using optional rack mount adapter RK-C101E.


Safe Area Marker

Displays dotted lines to indicate the areas corresponding to 80%, 88% and 90% of the screen size.

Specifications

Model	TM-1051DG	
Type	Color Video Monitor	
Picture Tube	10" (9"V) (diagonally measured), stripepitch 0.50 mm	
Horizontal Resolution	more than 280 TV lines	
Scanning Frequency	H: 15.75 kHz (NTSC)/ 15.625 kHz (PAL); V: 50 Hz/60 Hz	
Power Requirement	120V/220V-240V AC, 50 Hz/60 Hz	
Power Consumption	0.9A (120V AC)/ 0.6A (220V-240V AC)	
Compliant Video Signal	INPUT A/B: NTSC (3.58 MHz), PAL (4.43 MHz), B/W (50 Hz/60 Hz) INPUT C/D: 480/60i, 576/50i (compatible with EMBEDDED AUDIO signal)	
Format	SD SDI	ITU-R BT. 656: 525/625 SMPTE 259M: 525
	EMBEDDED AUDIO	SMPTE 272M
Color Temperature	6,500K / 9,300K (switchable)	
Input/Output terminal A	Composite	Input: BNC x 1 (1.0V(p-p), 75 Ω, negative sync., auto-termination) Output: BNC x 1 (Bridged Out)
Input/Output terminal B		Input: BNC x 1 (1.0V(p-p), 75 Ω, negative sync., auto-termination) Output: BNC x 1 (Bridged Out)
Input/Output terminal C-D	SDI	Input: BNC x 2 Output: BNC x 1 (Switched Out) RCA x 2 (EMBEDDED AUDIO Monitor Out, CH1 and CH2)
Dimensions (W x H x D)	8-3/4" x 8-3/4" x 14-1/4" (222 x 220 x 360.3mm)	
Weight	17.4 lbs./ 7.9kg	

Remote Pin Assign



Caution:
This is a female connector.

NO.		Functions to be controlled
1	INP. A	Changes the input to INPUT A
2	INP. C	Changes the input to INPUT C
3	MARKER	Turns on/off MARKER
4	ASPECT	Changes ASPECT
5	TALLY	Controls the tally lamp
6	L. METER	Turns on/off AUDIO LEVEL METER
7		External control
8		GND

Factory preset. Six control functions are user adjustable.

Aspect Ratio Select

Scanning can be changed between 4:3 and 16:9 aspect ratios by using the on-screen menu or RJ-45 trigger.

Underscan

To allow viewing of the entire active picture, underscan mode can be selected by pushing the appropriate switch on the front panel.

Color Adjustment, Blue Check, and Color Off

The Screens Check mode allows selection of the above for setting hue & saturation, checking noise in the blue channel, and setting white balance.

Two-color Tally Lamp

Easily visible tally lamp is located on the monitor's front panel. Red or green operational color is selectable via the on-screen menu.

Wired Remote Control Facility

An RJ-45 connector located on the rear panel allows remote on/off control of several selectable functions, including Tally, Aspect Ratio, Input A or C, Audio Level Meter, and Marker.

Other features


- NTSC/ PAL Compatibility
- Digital Comb Filter

Front/Rear View


Front Control Panel View



Rear Panel View

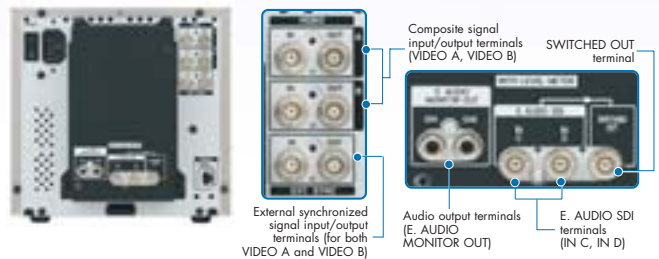

Dimensions

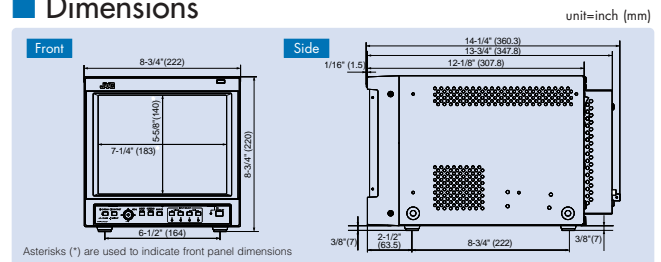

E. & O.E Design and specifications are subject to change without notice.
All brand or product names may be trademarks and/or registered trademarks of their respective owners.
All rights not expressly granted herein are reserved.
Copyright © 2006 Victor Company of Japan, Limited (JVC). All Rights Reserved.

JVC®

DISTRIBUTED BY

JVC PROFESSIONAL PRODUCTS COMPANY
DIVISION OF JVC AMERICAS CORP.
1700 Valley Road, Wayne, N.J. 07470
TEL: (973) 317-5000, (800) 582-5825 FAX: (973) 317-5030
Internet Web Site <http://www.jvc.com/pro>
E-mail: proinfo@jvc.com

JVC CANADA INC.
21 Finchdene Square, Scarborough, Ontario M1X 1A7
TEL: (416) 293-1311 FAX: (416) 293-8208
Internet Web Site <http://www.jvc.ca/en/pro/>

Printed in Japan
ICN-0336

"JVC" is the trademark or registered trademark of Victor Company of Japan, Limited.