ACCESSORY

Hospital Grade



interactive system provider interface box with integrated HD tuner

DESIGNED SPECIFICALLY FOR THE HEALTHCARE INDUSTRY

COMPATIBLE LCD MONITORS M3701C-BH M3702C-BH M4210C-BH M4212C-BH (monitor speakers are optional)

INTEGRATED Pro:Idiom® to unlock secured premium content

HD INTERFACE Provides the High Definition Interface with interactive system providers

> BUILT-IN TUNER ATSC/NTSC/Clear QAM

REMOTE MONITOR CONTROL Control monitor power on/off, input sources, adjust volume settings and change channels directly or through the MPI™ and RS-232C interfaces

REMOTE DISPLAY MONITORING The status of the display can be monitored through the MPI port (using special equipment (**sold separately**)), providing information to verify the status of the monitor such as on/off status, signal state, and the currently tuned channel.

> HDMI™ WITH HDCP INTERFACE Backward compatible with monitors with DVI input via HDMI to DVI-M cable (included)

> > BUILT-IN PILLOW SPEAKER PORT

CLONING CAPABLE When used with optional Zenith QuickSet II "Clone" programmer model LT2002

> 1 YEAR LIMITED WARRANTY (parts/labor)


NOTES: Zenith "Setup Remote" model #124-213-07 (sold separately) is required to configure the HCS5650.

The HCS5650 is only compatible with the LG compatible models listed. The HCS5650 is not compatible with non-LG televisions.



www.LGcommercial.com

CCESSOR

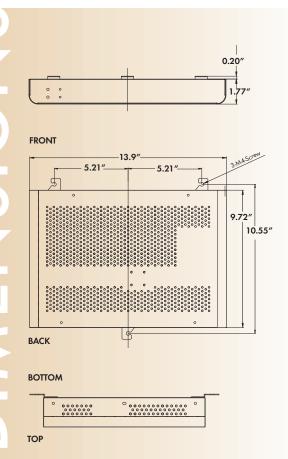

REAR JACK PANEL



Product Dimensions (D×W×H)	9.7"×13.9"×1.8"
Weight	7.7 lbs.
Carton Dimensions (D×W×H)	14.9"×17.5"×5.1"
Shipping Weight	7.9 lbs.
UPC Code	044642702526
Connector (MPI)	Standard RJ-11
Able to Address Up To	1 Display
Computer Requirements	Control Software and
	Standard Serial (RS-232) Interface Yes
Integrated Pro:Idiom Built-in ATSC/NTSC/Clear QAM	
Source Selection	
	Any valid input source
Command Set	Digital MPI – Power On, Power Off,
	Volume Up, Volume Down, Set Maximum
	Volume, Set Minimum Volume
Request TV Status	Signal Strength, Power Status, TV Volume Leve
	Channel Number
Rating	AC 100-240V~50/60Hz, 40W
AC Input	AC 120V~60Hz, Max. 8A
AC Output	AC 120V~60Hz, Max. 8A
HDMI RF	2 Inputs
	1 In (Antenna / Cable)
Pillow Speaker	1 ln
AC	1 ln
Audio	3.5mm Stereo Jack
MPI (on Superport card)	RJ-11 Modular Jack
Service	RS-232C (9-pin D-Sub Male)
Remote In	3.5mm Jack (for IR Receiver)
OUTPUTS	10
HDMI	1 Out
AC	1 Out
Audio	3.5mm Stereo Jack (use with DVI)
Digital Audio	Digital Audio Out (Optical) SPDIF
Display Control	RS-232C 9-pin D-Sub Female
Aux Control	3.5mm jack
	Yes
UL, cUL LIMITED WARRANTY	
INCLUDED IN CARTON	1 year (parts/labor)
HCS5650 ISP Interface Box v	with Integrated HD Tuner
Installation and Operating Gu	
6 ft. AC Power Cord (UL Hospit 5 ft. RS-232C M-to-F Cable (H	
	Cable accepts above cable for HDMI-to-HDMI
5 ft. HDMI to DVI-M Cable (H	
Five (5) brackets with screws for	
3 ft. IR Receiver Cable	
	x (2 5)
5 ft. Stereo plug to stereo plug	-
OPTIONAL MOUNTS/ACCE	
	200
Peerless® Wall Mount PWMT	
PWMT300-AC1 Peerless Acc	
	emote and batteries







LG Electronics U.S.A., Inc. Commercial Products Division 2000 Millbrook Drive Lincolnshire, IL 60069

Customer Service: 888.865.3026 Contact your LG Regional Sales Representative Healthcare: 877.793.6484 Design, features and specifications subject to change without notice.

© Copyright 2008 LG Electronics USA, Inc. All Rights Reserved. Pro:Idiom is a registered trademark and MPI is a trademark of Zenith Electronics Corporation. The lightning bolt 'z' is a registered trademark of Zenith Electronics Corporation. Zenithbrand products are sold and serviced by LG Electronics, USA, Inc. All other product and brand names are trademarks or registered trademarks of their respective companies.

SPEC_HCS5650 LG070815_PR