

# FUSION®

USER / INSTALLATION MANUAL

## Marine Wired Remote Control

MS-WR600C



# FUSION®

[www.fusionelectronics.com](http://www.fusionelectronics.com)

FUSION Electronics New Zealand Ph: +64 9 369 2900

FUSION Electronics Australia Ph: +61 1300 736 012

FUSION Electronics Europe Ph: +44 845 299 7586

FUSION Electronics USA Ph: +1 623 580 9000

PUBLISHED BY FUSION ELECTRONICS LIMITED:  
©Copyright 2010 by FUSION Electronics Limited. All rights reserved.  
Specifications and design are subject to change without notice.



YOU CAN HELP PROTECT THE ENVIRONMENT!  
Please remember to respect the local regulations: Hand in the non-working electrical equipment to an appropriate waste disposal center.

Compatible with MS-CD600, MS-AV600, MS-IP600 and MS-RA200

# Button Description



## POWER

Press to turn the unit ON/OFF.



## SOURCE

Press to select the desired source.  
Radio (FM-AM-SIRIUS) - DVD/CD/MP3 - iPod - AUX (SIRIUS - USA only)



## MUTE

### Short Press

Press to Mute/Un-Mute sound in all zones.

### Press and Hold

To enter configuration menu.



## MENU

Press to enter menu system. Press to return to previous screen.



## PLAY/PAUSE

Play/Pause track in DVD/CD/MP3 and iPod mode. MS-RA200 only - Press to cycle tuner station search. Manual/Auto/Presets



## ROTARY ENCODER

### Turn

To adjust volume, move up or down a menu structure, or adjust a specific setting item.

### Press

To select a highlighted option, confirm a setting.



## BACK/PREVIOUS

### Short Press

DVD/CD/MP3/iPod - Select the previous track.

AM/FM/Sirius - Start tuning down the frequency spectrum. (Auto/Manual tuning mode) or previous preset (Preset mode).

### Press and Hold

DVD/CD/MP3/iPod - Rewind the current track.



## FORWARD/NEXT

### Short Press

DVD/CD/MP3/iPod - Select the next track. AM/FM/Sirius - Start tuning up the frequency spectrum. (Auto/Manual tuning mode) or next preset (Preset mode).

### Press and Hold

DVD/CD/MP3/iPod - Fast forward the current track.

# Operation

## ASSIGNING THE REMOTE TO A ZONE

Press and hold the 'Mute' button for 5-6 seconds. Select 'Assign Zone'. Select zone to allocate remote too. (Zone 1, Zone 2, Zone 3, Zone 123). Press the 'Menu' button to exit.

**Note:** The MS-RA200 is a 2 Zone Marine Stereo, Zone 3 is not available.

## SUB LIMIT

Press the 'Menu' button and select 'Sub Limit'. Turn the 'Rotary Encoder' to adjust level. Press the 'Menu' button to exit.

## ZONE VOLUME

Turn the 'Rotary Encoder' to adjust the volume in the assigned zone.

## BACKLIGHT BRIGHTNESS

Press and hold the 'Menu' button while turning the 'Rotary Encoder' to adjust.

### Standby Mode

After a period of inactivity the remote enters standby mode, reducing the backlight brightness. (Default) To switch the backlight off in standby mode (Power save), press and hold the 'Mute' button for 5-6 seconds. Select 'Backlight'. Select 'Off'. Press the 'Menu' button to exit.

# Installation

To complete the ultimate marine audio experience, a total of three MS-WR600 Marine Wired Remote Controls can be installed in various locations, creating a flexible zone control solution throughout a vessel. The MS-WR600 is a plug and play device. Connect to the CANbus cable connection on your FUSION Marine Stereo. Please refer to the MS-CD600/MS-AV600/MS-IP600/MS-RA200 Marine Stereo manual for further detailed operation instructions.


**Option 1:** Recommended installation.

**Option 2:** Requires a Y Splitter Cable (MS-WR600Y, sold separately). Cables from the splitter (\*) to each remote must be of equal length to ensure correct operation.



**Note:** The supplied 'Terminator Plug' must be fixed to the last remote. Failure to do so could effect operation.

**Optional Accessory:** MS-WR600EXT6 - 6m extension lead.  
MS-WR600Y - Y Splitter Cable


## OPTION 1

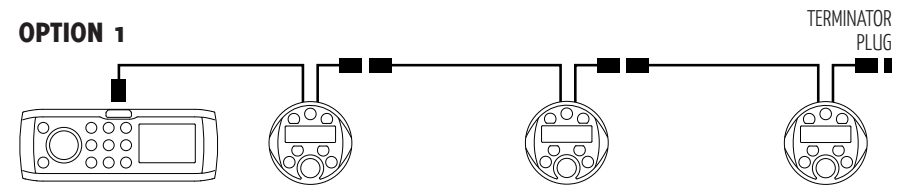

## OPTION 2

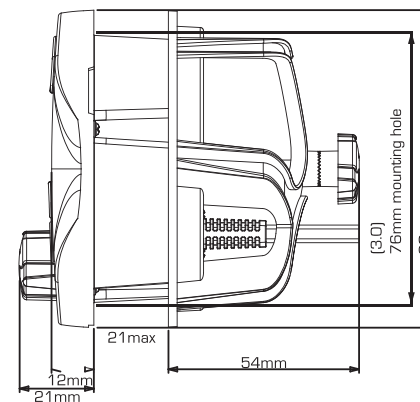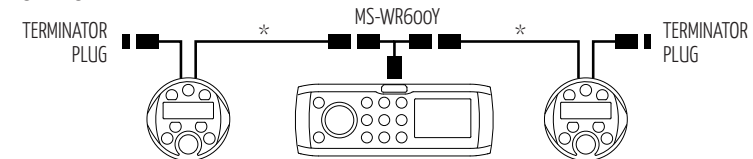

**Note:** The remote should be mounted on no more than a 45° angle from the vertical plane.



## RECORD YOUR PRODUCT DETAILS HERE:

Model Number .....  
Date Of Purchase .....  
Affix Receipt Here