

# SSC-1000

## IC SERIES CAMERA CONTROLLER



### FEATURES

- Long Distance Control: Up to 1.2km On RS-485 Communication.
- IC (Intelligent Camera) Series Controller For:
  - SCC-641-Color Pan Tilt Zoom Dome Camera
  - SCC-C6403-Day/Night Pan Tilt Zoom Dome Camera
  - SCC-C6407- WDR, Day/Night, Pan Tilt Zoom Dome Camera
  - SCC-C6475- IP, WDR, Day/Night, Pan Tilt Zoom Dome Camera
  - SCC-C4301- Low Light, Motorized Zoom Camera
  - SCC-C4307- WDR, Day/Night, Motorized Zoom Camera
  - SCC-931T- High Impact, Color Dome Camera
  - SCC-C9302(F)- WDR, Day/Night, High Impact Dome Cameras
- Controls Up To 128 Pan Tilt Zoom, Dome Cameras
- Up To 8 Qty. Of SSC-1000 Controllers In Each System


### SUMMARY

The SSC-1000 controller can be used to easily control the Samsung Electronics SmartDome or zoom Series cameras which include the Pan Tilt Zoom Series Dome Cameras, the High Impact Dome Cameras and Motorized Zoom Lens Cameras.

The SSC-1000 controller features a backlit LCD, four direction joystick, camera call up and camera programming buttons. The controller will manipulate up to 128 devices. It utilizes RS-485 in full or half duplex communication and up to eight SSC-1000 devices can be used in one system configuration. Programming of switching and control functions such as video switching, pan/tilt lens control, and external machinery control of the cameras in the system can be accomplished through the SSC-1000 controller.

# SSC-1000 | TECHNICAL SPECIFICATIONS

Dimensions (unit : mm)

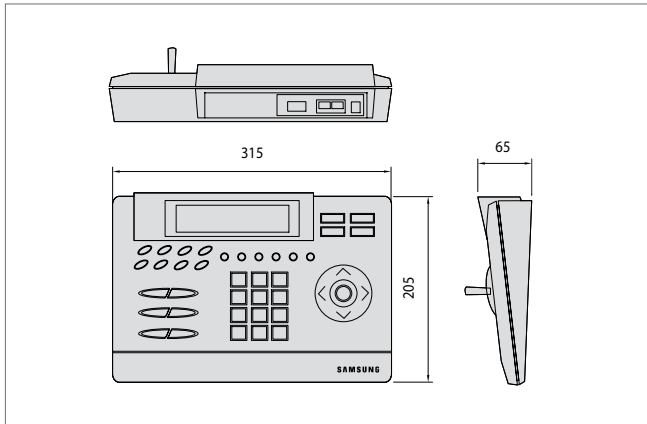

Rear Panel



## SPECIFICATIONS

Communication	Interface Type	RS-485
	Connector Type	Modular Type x 2, D-Sub x 1
	Baud Rate	4,800/9,600/19,200/38,400 bps
	RS-485 Connector	No 3: (Yellow): DATA "+", No 5: (Red): DATA "-"
	D-SUB Connector	No 2: DATA "+", No 3: DATA "-"
Display	LCD	2x4 Line
	LED	Menu, Preset, Pattern, Scan, Auto Pan
Switching & Control	Video Switching	Auto Pan, Reset
	Pan/Tilt & Lens Control	Sequence, Tour, Salvo
		Pan Left/Right
		Tilt Up/Down
		Iris Open/ Close
		Focus Far/ Near
		Zoom Tele/Wide
		Preset, Auto Pan, Scan, Pattern
External Machinery Control	Aux1, Aux2, Aux3, Aux4	
Power Requirement	Power Source	DC 9V, 500mA
Physical Specification	Dimensions (W x H x D)	12.4" x 2.6" x 8" / 315 x 65 x 205 mm
	Weight	2.4lb / 1.1Kg
	Certifications	UL, FCC