

# Product Catalog

www.ikey.com



# Introduction

iKey has the solution for your rugged peripheral requirements.

For over two decades, iKey has provided customers around the world with keyboards, displays and pointing devices tailored for their specific needs. iKey's fully sealed, NEMA-rated peripherals are resistant to dirt, dust, water and cleaning agents typically found in the following environments:

- Industrial
- Medical
- Military
- Public Safety
- Food & Beverage Processing
- Material Handling
- Pharmaceutical
- Mobile Computing
- Outdoor / Kiosk

Product features include backlit keys for low-light areas, built-in mounting holes and integrated pointing devices. iKey can customize keyboard solutions to meet unique specifications and offers layouts in 17 languages.



Call **(800) 866-6506** or visit **[www.ikey.com](http://www.ikey.com)** to receive additional details on any iKey product or service. Founded on the principles of superior innovation, quality and service, iKey is the world leader in premium input devices.

## Click to Skip to Section

- Desktop Keyboards
- Wireless Keyboards
- Mobile Keyboards
- Medical Keyboards & Pointing Devices
- Specialized Keyboards
- Panel Mount Keyboards
- OEM Keyboard Kits
- Rackdrawer Keyboards
- Intrinsically Safe and Nonincendive Products
- Pointing Devices
- Flat Panel Monitors
- Cursor Controls
- RAM Mounts
- Glossary of Terms

# Desktop Keyboards

iKey's rugged desktop keyboards stand up to the severe conditions that exist in industrial environments. All of the desktop keyboards are certified to NEMA 4X specifications, which means they are resistant to dirt, liquids and corrosives.

## DU-5K



14.94" x 6.63" x 1.81" (W-H-D)  
379.5 x 168.4 x 45.9 (mm)

- Desktop Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case
- Mounting Holes in Case
  - Other Models:
    - \* DU-5K-IS
    - \* DU-5K-NI
    - \* PMU-5K
    - \* DU-5K-OEM
    - \* DW-5K

Dimensions (W-H-D)	14.94" x 6.63" x 1.81"
Dimensions (mm)	379.5 x 168.4 x 45.9
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2, USB, or STD
Cable Type/Length	10' straight (3 m)

## DU-5K-TP2



14.94" x 6.62" x 1.81" (W-H-D)  
379.5 x 168.1 x 45.9 (mm)

- Desktop Rubber Keyboard with Touchpad in ABS Polycarbonate Case
- Mounting Holes in Case
  - Other Models:
    - \* PMU-5K-TP2

Dimensions (W-H-D)	14.94" x 6.62" x 1.81"
Dimensions (mm)	379.5 x 168.1 x 45.9
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## DT-5K



16.25" x 7.88" x 1.80" (W-H-D)  
412.8 x 200.2 x 45.7 (mm)

- Desktop Rubber Keyboard with HulaPoint II™ in Stainless Steel Case
- Optional Mounting Holes in Case
  - Other Models:
    - \* DT-5K-IS
    - \* DT-5K-NI
    - \* PM-5K
    - \* 5K-OEM

Dimensions (W-H-D)	16.25" x 7.88" x 1.80"
Dimensions (mm)	412.8 x 200.2 x 45.7
Total Keys	113
Function Keys	20
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

## DT-5K-MEM-TP



16.25" x 7.88" x 1.80" (W-H-D)  
412.8 x 200.2 x 45.7 (mm)

- Desktop Membrane Keyboard with Touchpad in Stainless Steel Case
- Hardcoated, Textured Polyester Film Keypad
  - Other Models:
    - \* PM-5K-MEM-TP
    - \* KYB-5K-MEM-TP-OEM

Dimensions (W-H-D)	16.25" x 7.88" x 1.80"
Dimensions (mm)	412.8 x 200.2 x 45.7
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)



# Desktop Keyboards

Dimensions (W-H-D)	14.94" x 6.63" x 1.81"
Dimensions (mm)	379.5 x 168.4 x 45.9
Total Keys	104
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Keyboard in ABS Polycarbonate Case
- Mounting Holes in Case
- Other Models:
  - \* PMU-1K



**DU-1K**

14.94" x 6.63" x 1.81" (W-H-D)  
379.5 x 168.4 x 45.9 (mm)

Dimensions (W-H-D)	16.25" x 7.88" x 1.80"
Dimensions (mm)	412.8 x 200.2 x 45.7
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Keyboard in Stainless Steel Case
- Optional Mounting Holes in Case
- Other Models:
  - \* PM-1000
  - \* DT-1000-IS
  - \* DT-1000-NI



**DT-1000**

16.25" x 7.88" x 1.80" (W-H-D)  
412.8 x 200.2 x 45.7 (mm)

Dimensions (W-H-D)	20.25" x 7.88" x 1.80"
Dimensions (mm)	514.4 x 200.2 x 45.7
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Keyboard with HulaPoint II™ in Stainless Steel Case
- Optional Mounting Holes in Case
- Other Models:
  - \* PM-2000
  - \* DT-2000-IS
  - \* DT-2000-NI



**DT-2000**

20.25" x 7.88" x 1.80" (W-H-D)  
514.4 x 200.2 x 45.7 (mm)

Dimensions (W-H-D)	20.25" x 7.9" x 2.2"
Dimensions (mm)	514.4 x 200.7 x 55.9
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +85°C
Operating Temp	0°C ~ +55°C
Sealing	NEMA 4X
Integrated Pointer	Trackball
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Keyboard with Integrated Trackball in Stainless Steel Case
- Removable Trackball for Easy Cleaning
- 38-mm Laser Trackball
- Other Models:
  - \* PM-2000-TB



**DT-2000-TB**

20.25" x 7.9" x 2.2" (W-H-D)  
514.4 x 200.7 x 55.9 (mm)

# Desktop Keyboards

## DT-81 / DBL-81



13.25" x 6.94" x 1.75" (W-H-D)  
336.6 x 176.3 x 44.5 (mm)

- Desktop Rubber Keyboard in Stainless Steel Case
- Compact Design
  - Other Models:
    - \* PM-81 / SLP-81
    - \* KYB-81-OEM / SL-81-OEM

Dimensions (W-H-D)	13.25" x 6.94" x 1.75"
Dimensions (mm)	336.6 x 176.3 x 44.5
Total Keys	81
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red/Green LED (DBL-81 only)
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

## DT-810/DBL-810



16.12" x 7.02" x 1.74" (W-H-D)  
409.4 x 178.3 x 44.2 (mm)

- Rubber Keyboard with HulaPoint II™ in Stainless Steel Case

Dimensions (W-H-D)	16.12" x 7.02" x 1.74"
Dimensions (mm)	409.4 x 178.3 x 44.2
Total Keys	81
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Red/Green LED (DBL-810 only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## DT-810-TB/DBL-810-TB



14.80" x 5.72" x 1.32" (W-H-D)  
376.0 x 145.3 x 33.5 (mm)

- Desktop Rubber Keyboard with Integrated Trackball in Stainless Steel Case
- 25-mm Laser Trackball

Dimensions (W-H-D)	14.80" x 5.72" x 1.32"
Dimensions (mm)	376.0 x 145.3 x 33.5
Total Keys	81
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +85°C
Operating Temp	0°C ~ +65°C
Sealing	NEMA 4X
Integrated Pointer	Trackball
Backlighting	Red/Green LED (DBL-810-TB only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## DP-88/SL-88



11.40" x 6.30" x 1.86" (W-H-D)  
289.6 x 160.0 x 47.2 (mm)

- Desktop Rubber Keyboard in ABS Polycarbonate Case
- Compact Design
  - Other Models:
    - \* PM-88 / SLP-88
    - \* DP-88-OEM / SL-88-OEM

Dimensions (W-H-D)	11.40" x 6.30" x 1.86"
Dimensions (mm)	289.6 x 160.0 x 47.2
Total Keys	88
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED (SL-88 only)
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

# Desktop Keyboards

Dimensions (W-H-D)	11.40" x 6.30" x 1.86"
Dimensions (mm)	289.6 x 160.0 x 47.2
Total Keys	84
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

- Desktop Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case
- Other Models:
  - \* PM-860
  - \* DP-860-OEM
  - \* DW-860



**DP-860**

11.40" x 6.30" x 1.86" (W-H-D)  
289.6 x 160.0 x 47.2 (mm)

Dimensions (W-H-D)	5.29" x 6.02" x 1.07"
Dimensions (mm)	134.4 x 152.9 x 27.2
Total Keys	18
Function Keys	-
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Number Pad Keyboard in Stainless Steel Case
- Other Models:
  - \* PM-18
  - \* KYB-18-OEM



**DT-18**

5.29" x 6.02" x 1.07" (W-H-D)  
134.4 x 152.9 x 27.2 (mm)

Dimensions (W-H-D)	14.44" x 5.40" x 0.89"
Dimensions (mm)	366.8 x 137.2 x 22.6
Total Keys	97
Function Keys	12
Number Pad	Full Size
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	Red LED (on SLK-97-TP only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Keyboard with Touchpad in ABS Polycarbonate Case



**SK-97-TP / SLK-97-TP**

14.44" x 5.40" x 0.89" (W-H-D)  
366.8 x 137.2 x 22.6 (mm)

# Desktop Keyboards

## SK-79/SLK-79



9.25" x 3.85" x 0.99" (W-H-D)  
235.0 x 97.8 x 25.1 (mm)

- Desktop Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case
- Ultra-Compact Design
  - Other Models:
    - \* SK-79-M / SLK-79-M
    - \* SK-79-OEM/SLK-79-OEM

Dimensions (W-H-D)	9.25" x 3.85" x 0.99"
Dimensions (mm)	235.0 x 97.8 x 25.1
Total Keys	79
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Red LED (SLK-79 only)
Cable	PS/2 or USB
Cable Type/Length	3' straight (0.91 m)

## SLK-77



9.25" x 3.85" x 0.87" (W-H-D)  
235.0 x 97.8 x 22.1 (mm)

- Desktop Rubber Keyboard in ABS Polycarbonate Case
- Ultra-Compact Design
  - Other Models:
    - \* SLK-77-M

Dimensions (W-H-D)	9.25" x 3.85" x 0.87"
Dimensions (mm)	235.0 x 97.8 x 22.1
Total Keys	77
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED
Cable	USB
Cable Type/Length	3' straight (0.91 m)

## SK-102/SLK-102



14.60" x 5.55" x 1.05" (W-H-D)  
370.8 x 141.0 x 26.7 (mm)

- Desktop Rubber Keyboard with HulaPoint™ in ABS Polycarbonate Case
  - Other Models:
    - \* SK-102-M / SLK-102-M

Dimensions (W-H-D)	14.60" x 5.55" x 1.05"
Dimensions (mm)	370.8 x 141.0 x 26.7
Total Keys	102
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint™
Backlighting	Red LED (SLK-102 only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## SK-102-TP/SLK-102-TP



14.60" x 5.55" x 0.91" (W-H-D)  
370.8 x 141.0 x 23.1 (mm)

- Desktop Rubber Keyboard with Touchpad in ABS Polycarbonate Case
  - Other Models:
    - \* SLK-102-TP-M

Dimensions (W-H-D)	14.60" x 5.55" x 0.91"
Dimensions (mm)	370.8 x 141.0 x 23.1
Total Keys	102
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	Red LED (SLK-102-TP only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)



# Desktop Keyboards

Dimensions (W-H-D)	14.60" x 5.55" x 0.92"
Dimensions (mm)	370.8 x 141.0 x 23.4
Total Keys	101
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED (SLK-101 only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Keyboard in ABS Polycarbonate Case  
- Other Models:  
\* SK-101-M / SLK-101-M

## SK-101/SLK-101



14.60" x 5.55" x 0.92" (W-H-D)  
370.8 x 141.0 x 23.4 (mm)

Dimensions (W-H-D)	14.94" x 6.63" x 1.81"
Dimensions (mm)	379.5 x 168.4 x 46.0
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +85°C
Operating Temp	0°C ~ +65°C
Sealing	NEMA 4X
Integrated Pointer	Trackball
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Keyboard with Integrated Trackball in ABS Polycarbonate Case
- 25-mm Laser Trackball

## DU-5K-TB



14.94" x 6.63" x 1.81" (W-H-D)  
379.5 x 168.4 x 46.0 (mm)

Dimensions (W-H-D)	15.18" x 7.07" x 1.72"
Dimensions (mm)	385.6 x 179.6 x 43.7
Total Keys	102
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Desktop Stainless Steel Keyboard with Integrated Touchpad

## DT-102-SS



15.18" x 7.07" x 1.72" (W-H-D)  
385.6 x 179.6 x 43.7 (mm)

# Wireless Keyboards

iKey's wireless keyboards offer convenience and functionality while maintaining the rugged standards of all iKey products. Models include the DW-5K and DW-860, which feature wireless USB technology, and the Bluetooth®-compatible BT-87-TP.

## DW-5K



14.97" x 6.61" x 1.91" (W-H-D)  
380.2 x 167.9 x 48.5 (mm)

- Wireless Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case
- 30-foot RF Range – No Line-of-Site Limitations
- Requires 3 AA Batteries – 6 Month Average Battery Life
- Other Models:
  - \*DW-5K-IS
  - \*DW-5K-NI

Dimensions (W-H-D)	14.97" x 6.61" x 1.91"
Dimensions (mm)	380.2 x 167.9 x 48.5
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	Wireless
Cable Type/Length	USB dongle

## DW-860



11.40" x 6.30" x 1.86" (W-H-D)  
289.6 x 181.0 x 47.2 (mm)

- Wireless Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case
- Compact Design
- 30-foot RF Range – No Line-of-Site Limitations
- Requires 3 AA Batteries – 6 Month Average Battery Life

Dimensions (W-H-D)	11.40" x 6.30" x 1.86"
Dimensions (mm)	289.6 x 181.0 x 47.2
Total Keys	84
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	Wireless
Cable Type/Length	USB dongle

## BT-87-TP



12.01" x 7.75" x 2.03" (W-H-D)  
305.1 x 196.9 x 51.6 (mm)

- Wireless Bluetooth®-Compatible Rubber Keyboard with Touchpad in ABS Polycarbonate Case
- Compact Design
- Submersible
- 30-foot RF Range
- Requires 2 AA Batteries
- Other Models:
  - \*BT-87-TP-IS
  - \*BT-87-TP-NI

Dimensions (W-H-D)	12.01" x 7.75" x 2.03"
Dimensions (mm)	305.1 x 196.9 x 51.6
Total Keys	87
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	Wireless

# Mobile Keyboards

iKey's mobile keyboards are easily integrated into vehicle, aircraft and marine applications. Each keyboard features mounting holes in its case and is resistant to dirt, dust and liquids. The rugged, mobile keyboards are often used in material handling, public safety, and military applications.

Dimensions (W-H-D)	11.40" x 6.30" x 1.86"
Dimensions (mm)	289.6 x 160.0 x 47.2
Total Keys	72
Function Keys	8
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

- Mobile Rubber Keyboard with Oversize Keys in ABS Polycarbonate Case
- Compact Design and Alphabetic Layout  
- Other Models:  
\*PM-72

**DP-72**



11.40" x 6.30" x 1.86" (W-H-D)  
289.6 x 160.0 x 47.2 (mm)

Dimensions (W-H-D)	8.25" x 4.4" x 1.05"
Dimensions (mm)	209.6 x 111.3 x 26.7
Total Keys	75
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 12
Integrated Pointer	-
Backlighting	Red LED
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Mobile Rubber Keyboard in Black Aluminum Case
- Backlit Keys for Low-Light Environments  
- Other Models:  
\*SL-75-OEM

**SL-75**



8.25" x 4.4" x 1.05" (W-H-D)  
209.6 x 111.3 x 26.7 (mm)

Dimensions (W-H-D)	9.25" x 3.85" x 1.60"
Dimensions (mm)	235.0 x 97.8 x 40.6
Total Keys	77
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED
Cable	USB
Cable Type/Length	3' straight (0.91 m)

- Mobile Rubber Keyboard in ABS Polycarbonate Case
- Ultra-Compact Design  
- Other Models:  
\*SLK-77

**SLK-77-M**



9.25" x 3.85" x 1.60" (W-H-D)  
235.0 x 97.8 x 40.6 (mm)

Dimensions (W-H-D)	11.40" x 6.30" x 1.90"
Dimensions (mm)	289.6 x 160.0 x 48.3
Total Keys	91
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2m)

- Mobile Rubber Keyboard with Epoxy Keycaps in ABS Polycarbonate Case
- Backlit Keys for Low-Light Environments  
- Other Models:  
\*SLP-91

**SL-91**



11.40" x 6.30" x 1.90" (W-H-D)  
289.6 x 160.0 x 48.3 (mm)

# Mobile Keyboards

## SK-79-M / SLK-79-M



9.25" x 3.85" x 1.67" (W-H-D)  
235.0 x 97.8 x 42.4 (mm)

- Mobile Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case
- Ultra-Compact Design
  - Other Models:
    - \* SK-79 / SLK-79
    - \* SK-79-OEM/SLK-79-OEM

Dimensions (W-H-D)	9.25" x 3.85" x 1.67"
Dimensions (mm)	235.0 x 97.8 x 42.4
Total Keys	79
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Red LED (SLK-79-M only)
Cable	PS/2 or USB
Cable Type/Length	3' straight (0.91 m)

## SK-101-M / SLK-101-M



14.50" x 5.50" x 1.56" (W-H-D)  
368.3 x 139.7 x 39.6 (mm)

- Mobile Rubber Keyboard in ABS Polycarbonate Case
  - Other Models:
    - \* SK-101 / SLK-101

Dimensions (W-H-D)	14.50" x 5.50" x 1.56"
Dimensions (mm)	368.3 x 139.7 x 39.6
Total Keys	101
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED (SLK-101-M only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## SK-102-M / SLK-102-M



14.50" x 5.50" x 1.56" (W-H-D)  
368.3 x 139.7 x 39.6 (mm)

- Mobile Rubber Keyboard with HulaPoint™ in ABS Polycarbonate Case
  - Other Models:
    - \* SK-102 / SLK-102

Dimensions (W-H-D)	14.50" x 5.50" x 1.56"
Dimensions (mm)	368.3 x 139.7 x 39.6
Total Keys	102
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint™
Backlighting	Red LED (SLK-102-M only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)



# Mobile Keyboards

## SLK-102-TP-M

Dimensions (W-H-D)	14.50" x 5.50" x 1.56"
Dimensions (mm)	368.3 x 139.7 x 39.6
Total Keys	102
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Mobile Rubber Keyboard with Touchpad in ABS Polycarbonate Case
- Other Models:  
\* SK-102-TP / SLK-102-TP



14.50" x 5.50" x 1.56" (W-H-D)  
368.3 x 139.7 x 39.6 (mm)

Dimensions (W-H-D)	9.69" x 3.78" x 1.14"
Dimensions (mm)	246.1 x 96.0 x 29.0
Total Keys	80
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	IP68
Integrated Pointer	HulaPoint II™
Backlighting	Green LED/NVIS Green B
Cable	USB
Cable Type/Length	5.9' straight (1.8 m)

- Industrial Silicone Rubber Keyboard with HulaPoint II™ in Conductive Plastic Case
- Designed to meet MIL-STD-461-E (high EMI standards)
- Submersible version available
- Adjustable green backlighting that is also available in a night vision (NVIS) compatible configuration
- Thin keyboard design
- Other Models:  
\* SLK-80-OEM

## SLK-80



9.69" x 3.78" x 1.14" (W-H-D)  
246.1 x 96.0 x 29.0 (mm)

Dimensions (W-H-D)	11.45" x 6.84" x 1.15"
Dimensions (mm)	290.8 x 173.7 x 29.2
Total Keys	88
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +75°C
Operating Temp	-40°C ~ +70°C
Sealing	IP68
Integrated Pointer	Force Sensing Resistor (FSR)
Backlighting	Green LED/NVIS Green B
Cable	USB
Cable Type/Length	5.9' straight (1.8 m)

- Industrial Silicone Rubber Keyboard with Force Sensing Resistor™ (FSR) in Conductive Plastic Case
- Designed for use in harsh EMI environments meeting 461 standards
- Submersible version available
- Adjustable green backlighting that is also available in a night vision (NVIS) compatible configuration
- Integrated blackout key
- Integrated holes for mobile applications
- Thin keyboard design

## SLK-880-FSR



11.45" x 6.84" x 1.15" (W-H-D)  
290.8 x 173.7 x 29.2 (mm)

# Mobile Keyboards

## SL-86-911



11.40" x 6.30" x 1.86" (W-H-D)  
289.6 x 160.0 x 47.2 (mm)

- Mobile Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case
- One-Touch Emergency Key
  - Other Models:
    - \* SLP-86-911
    - \* SL-86-911-OEM

Dimensions (W-H-D)	11.40" x 6.30" x 1.86"
Dimensions (mm)	289.6 x 160.0 x 47.2
Total Keys	86
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

## SL-86-911-TP



11.40" x 7.30" x 1.86" (W-H-D)  
289.6 x 185.4 x 47.2 (mm)

- Mobile Rubber Keyboard with Touchpad in ABS Polycarbonate Case
- One-Touch Emergency Key
  - Other Models:
    - \* The Thin SL-86-911-TP-FL

Dimensions (W-H-D)	11.40" x 7.30" x 1.86"
Dimensions (mm)	289.6 x 185.4 x 47.2
Total Keys	86
Function Keys	10
Number Pad	NumLock Access
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

## FT-86-911-TP



11.94" x 7.69" x 1.68" (W-H-D)  
303.3 x 195.3 x 42.7 (mm)

- Mobile ABS Polycarbonate Keyboard with Touchpad in ABS Polycarbonate Case
- Full-Travel Keystroke
- One-Touch Emergency Key
- Detachable Cable

Dimensions (W-H-D)	11.94" x 7.69" x 1.68"
Dimensions (mm)	303.3 x 195.3 x 42.7
Total Keys	88
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 12
Integrated Pointer	Touchpad
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

## FT-88-911-TP



11.94" x 7.69" x 1.20" (W-H-D)  
303.3 x 195.3 x 30.5 (mm)

- Mobile ABS Polycarbonate Keyboard with Touchpad in ABS Polycarbonate Case
- Full-Travel Keystroke
- One-Touch Emergency Key
- Thinner depth dimension than FT-86-911-TP

Dimensions (W-H-D)	11.94" x 7.69" x 1.20"
Dimensions (mm)	303.3 x 195.3 x 30.5
Total Keys	88
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4
Integrated Pointer	Touchpad
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

# Medical Keyboards & Pointing Devices

iKey's medical keyboards and pointing devices feature liquid-proof designs that are easily cleaned with any hospital disinfectant. They are excellent tools in the prevention of cross-contamination.

Dimensions (W-H-D)	14.85" x 5.87" x 0.86"
Dimensions (mm)	377.2 x 149.1 x 21.9
Total Keys	101
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED
Cable	USB
Cable Type/Length	10' straight (3 m)

- Slim-KeyMD™ Rubber Medical Keyboard in ABS Polycarbonate Case



**SLK-101-FL**

14.85" x 5.87" x 0.86" (W-H-D)  
377.2 x 149.1 x 21.9 (mm)

Dimensions (W-H-D)	14.85" x 5.87" x 0.86"
Dimensions (mm)	377.2 x 149.1 x 21.9
Total Keys	102
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	Red LED
Cable	USB
Cable Type/Length	10' straight (3 m)

- Slim-KeyMD™ Rubber Medical Keyboard with Touchpad in ABS Polycarbonate Case



**SLK-102-TP-FL**

14.85" x 5.87" x 0.86" (W-H-D)  
377.2 x 149.1 x 21.9 (mm)

Dimensions (W-H-D)	14.44" x 5.40" x 0.89"
Dimensions (mm)	366.8 x 137.2 x 22.6
Total Keys	97
Function Keys	12
Number Pad	Full Size
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	Red LED (on SLK-97-TP only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Desktop Rubber Keyboard with Touchpad in ABS Polycarbonate Case



**SK-97-TP / SLK-97-TP**

14.44" x 5.40" x 0.89" (W-H-D)  
366.8 x 137.2 x 22.6 (mm)

Dimensions (W-H-D)	2.58" x 5" x 1.56"
Dimensions (mm)	65.5 x 127.0 x 39.6
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +60°C
Sealing	NEMA 4X
Cable	USB or PS/2 Adapter
Cable Type/Length	6' straight (1.8 m)

- AquaPoint™ Sealed Medical Optical Mouse



**DT-OM-FL**

2.58" x 5" x 1.56" (W-H-D)  
65.5 x 127.0 x 39.6 (mm)

# Specialized Keyboards

iKey's specialized keyboards have unique features that are commonly used in military applications. Each specialized keyboard maintains the rugged characteristics that are standard in all iKey products.

## SL-86-911-461



11.40" x 6.30" x 1.86" (W-H-D)  
289.6 x 160.0 x 47.2 (mm)

- Mobile Rubber Keyboard with HulaPoint™ in ABS Polycarbonate Case
- MIL-STD-461E Approved
- Integrated Blackout Key

Dimensions (W-H-D)	11.40" x 6.30" x 1.86"
Dimensions (mm)	289.6 x 160.0 x 47.2
Total Keys	86
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint™
Backlighting	Red LED
Cable	PS/2
Cable Type/Length	4' coiled (1.2 m)

## SL-88-NV



11.40" x 6.30" x 1.86" (W-H-D)  
289.6 x 160.0 x 47.2 (mm)

- NVIS Green B Compliant, Mobile Rubber Keyboard with ABS Polycarbonate Case
- Green B Backlighting Reduces Bloom Effect When Wearing Night Vision Goggles

Dimensions (W-H-D)	11.40" x 6.30" x 1.86"
Dimensions (mm)	289.6 x 160.0 x 47.2
Total Keys	88
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	NVIS Green B
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

## AK-39



6.65" x 3.06" x 0.81" (W-H-D)  
168.9 x 77.7 x 20.6 (mm)

- Wearable Keyboard with Force Sensing Resistor™ (FSR)
- Fits easily onto user's forearm
- Removable snap-on faceplate
- Designed to meet MIL-STD-461E (high EMI standards)
- Adjustable green backlighting that is also available in a night vision (NVIS) compatible configuration

Dimensions (W-H-D)	6.65" x 3.06" x 0.81"
Dimensions (mm)	168.9 x 77.7 x 20.6
Total Keys	39
Function Keys	-
Number Pad	NumLock Access
Storage Temp	-40°C ~ +75°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	Force Sensing Resistor (FSR)
Backlighting	Green LED/NVIS Green B
Cable	USB
Cable Type/Length	5.4' straight (1.6 m)

## SL-89



9.88" x 7.84" x 0.62" (W-H-D)  
251.0 x 199.1 x 15.7 (mm)

- Industrial Silicone Rubber Keyboard in Aluminum Backplate
- Thin keyboard design
- Adjustable green backlighting that is also available in a night vision (NVIS) compatible configuration
- Integrated mounting holes

Dimensions (W-H-D)	9.88" x 7.84" x 0.62"
Dimensions (mm)	251.0 x 199.1 x 15.7
Total Keys	89
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Green LED/NVIS Green B
Cable	Right Angle USB
Cable Type/Length	14.5" coiled (0.4 m) Stretches to 59" (1.5 m)



# Panel Mount Keyboards

iKey's panel mount keyboards are designed for easy integration into workstations, kiosks and industrial environments. They are built to withstand harsh environments, either indoors or outdoors.

Dimensions (W-H-D)	17.70" x 9.20" x 1.58"
Dimensions (mm)	449.6 x 233.7 x 40.1
Total Keys	113
Function Keys	20
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Panel Mount Rubber Keyboard with HulaPoint II™ in Stainless Steel Bezel
  - Other Models:
    - \* DT-5K
    - \* PM-5K-IS
    - \* PM-5K-NI



**PM-5K**

17.70" x 9.20" x 1.58" (W-H-D)  
449.6 x 233.7 x 40.1 (mm)

Dimensions (W-H-D)	15.40" x 7.060" x 0.525"
Dimensions (mm)	391.2 x 179.3 x 13.3
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Panel Mount Rubber Keyboard with HulaPoint II™
  - Other Models:
    - \* DU-5K
    - \* DU-5K-OEM



**PMU-5K**

15.40" x 7.060" x 0.525" (W-H-D)  
391.2 x 179.3 x 13.3 (mm)

Dimensions (W-H-D)	15.14" x 6.80" x 0.53"
Dimensions (mm)	384.6 x 172.7 x 13.5
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Panel Mount Rubber Keyboard with Touchpad
  - Other Models:
    - \* DU-5K-TP2



**PMU-5K-TP2**

15.14" x 6.80" x 0.53" (W-H-D)  
384.6 x 172.7 x 13.5 (mm)

Dimensions (W-H-D)	17.70" x 9.20" x 1.58"
Dimensions (mm)	449.6 x 233.7 x 40.1
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Panel Mount Membrane Keyboard with Touchpad in Stainless Steel Bezel
- Hardcoated, Textured Polyester Film Keypad
  - Other Models:
    - \* DT-5K-MEM-TP
    - \* KYB-5K-MEM-TP-OEM



**PM-5K-MEM-TP**

17.70" x 9.20" x 1.58" (W-H-D)  
449.6 x 233.7 x 40.1 (mm)

# Panel Mount Keyboards

## PM-101 / SLP-101



15.10" x 6.05" x 0.58" (W-H-D)  
383.5 x 153.7 x 14.7 (mm)

- Rubber Desktop Keyboard in ABS Polycarbonate Case
  - Other Models:
    - \* SK-101
    - \* SK-101-M

Dimensions (W-H-D)	15.10" x 6.05" x 0.58"
Dimensions (mm)	383.5 x 153.7 x 14.7
Total Keys	101
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED (SLP-101 only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## PM-102 / SLP-102



15.10" x 6.05" x 0.58" (W-H-D)  
383.5 x 153.7 x 14.7 (mm)

- Rubber Desktop Keyboard with HulaPoint II™ in ABS Polycarbonate Case
  - Other Models:
    - \* SK-102
    - \* SK-102-M

Dimensions (W-H-D)	15.10" x 6.05" x 0.58"
Dimensions (mm)	383.5 x 153.7 x 14.7
Total Keys	102
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Red LED (SLP-102 only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## PM-102-TP / SLP- 102-TP



15.10" x 6.05" x 0.58" (W-H-D)  
383.5 x 153.7 x 14.7 (mm)

- Rubber Desktop Keyboard with Touchpad in ABS Polycarbonate Case
  - Other Models:
    - \* SK-102-TP
    - \* SLK-102-TP-M

Dimensions (W-H-D)	15.10" x 6.05" x 0.58"
Dimensions (mm)	383.5 x 153.7 x 14.7
Total Keys	102
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	-40°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	Red LED (SLP-102-TP only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

# Panel Mount Keyboards

Dimensions (W-H-D)	17.70" x 9.20" x 1.58"
Dimensions (mm)	449.6 x 233.7 x 40.1
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Panel Mount Rubber Keyboard in Stainless Steel Bezel

- Other Models:

- \* DT-1000
- \* PM-1000-IS
- \* PM-1000-NI

## PM-1000



17.70" x 9.20" x 1.58" (W-H-D)  
449.6 x 233.7 x 40.1 (mm)

Dimensions (W-H-D)	15.40" x 7.060" x 0.525"
Dimensions (mm)	391.2 x 179.3 x 13.3
Total Keys	104
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Panel Mount Rubber Keyboard

- Other Models:

- \* DU-1K

## PMU-1K



15.40" x 7.060" x 0.525" (W-H-D)  
391.2 x 179.3 x 13.3 (mm)

Dimensions (W-H-D)	21.8" x 9.2" x 1.86"
Dimensions (mm)	553.7 x 233.7 x 47.2
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Panel Mount Rubber Keyboard with HulaPoint II™ in Stainless Steel Bezel

- Other Models:

- \* DT-2000
- \* PM-2000-IS
- \* PM-2000-NI

## PM-2000



21.8" x 9.2" x 1.86" (W-H-D)  
553.7 x 233.7 x 47.2 (mm)

Dimensions (W-H-D)	21.80" x 9.20" x 2.02"
Dimensions (mm)	553.7 x 233.7 x 51.3
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +85°C
Operating Temp	0°C ~ +55°C
Sealing	NEMA 4X
Integrated Pointer	Trackball
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Panel Mount Rubber Keyboard with Trackball in Stainless Steel Bezel

- 38-mm Laser Trackball

- Other Models:

- \* DT-2000-TB

## PM-2000-TB



21.80" x 9.20" x 2.02" (W-H-D)  
553.7 x 233.7 x 51.3 (mm)

# Panel Mount Keyboards

## PM-81 / SLP-81



14.05" x 7.81" x 1.58" (W-H-D)  
356.9 x 198.4 x 40.1 (mm)

- Panel Mount Rubber Keyboard in Stainless Steel Bezel
- Compact Design
  - Other Models:
    - \* DT-81 / DBL-81
    - \* KYB-81-OEM / SL-81-OEM

Dimensions (W-H-D)	14.05" x 7.81" x 1.58"
Dimensions (mm)	356.9 x 198.4 x 40.1
Total Keys	81
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED (SLP-81 only)
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

## PM-88 / SLP-88



11.80" x 6.80" x 0.62" (W-H-D)  
300.0 x 172.7 x 15.7 (mm)

- Panel Mount Rubber Keyboard
- Compact Design
  - Other Models:
    - \* DP-88 / SL-88
    - \* DP-88-OEM / SL-88-OEM

Dimensions (W-H-D)	11.80" x 6.80" x 0.62"
Dimensions (mm)	300.0 x 172.7 x 15.7
Total Keys	88
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED (SLP-88 only)
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## PM-860



11.80" x 6.80" x 0.62" (W-H-D)  
300.0 x 172.7 x 15.7 (mm)

- Panel Mount Rubber Keyboard with HulaPoint II™
- Compact Design
  - Other Models:
    - \* DP-860
    - \* DW-860
    - \* DP-860-OEM

Dimensions (W-H-D)	11.80" x 6.80" x 0.62"
Dimensions (mm)	300.0 x 172.7 x 15.7
Total Keys	84
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)



# Panel Mount Keyboards

Dimensions (W-H-D)	11.80" x 6.80" x 0.62"
Dimensions (mm)	300.0 x 172.7 x 15.7
Total Keys	86
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

- Panel Mount Rubber Keyboard with HulaPoint II™
- Compact Design
- One-Touch Emergency Key
  - Other Models:
    - \* SL-86-911
    - \* SL-86-911-OEM

**SLP-86-911**



11.80" x 6.80" x 0.62" (W-H-D)  
300.0 x 172.7 x 15.7 (mm)

Dimensions (W-H-D)	11.80" x 6.79" x 0.70"
Dimensions (mm)	299.7 x 172.5 x 17.8
Total Keys	91
Function Keys	12
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

- Panel Mount Rubber Keyboard with Epoxy Keycaps
  - Other Models:
    - \* SL-91

**SLP-91**



11.80" x 6.79" x 0.70" (W-H-D)  
299.7 x 172.5 x 17.8 (mm)

Dimensions (W-H-D)	11.80" x 6.79" x 0.61"
Dimensions (mm)	299.7 x 172.5 x 15.5
Total Keys	72
Function Keys	8
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

- Panel Mount Rubber Keyboard with Oversize Keys in ABS Polycarbonate Case
- Compact Design and Alphabetic Layout
  - Other Models:
    - \* DP-72

**PM-72**



11.80" x 6.79" x 0.61" (W-H-D)  
299.7 x 172.5 x 15.5 (mm)

# Panel Mount Keyboards

## PM-18



5.85" x 7.05" x 0.70" (W-H-D)  
148.6 x 179.1 x 17.8 (mm)

- Panel Mount Rubber Numeric Keypad with Stainless Steel Bezel

- Other Models:  
\* DT-18  
\* KYB-18-OEM

Dimensions (W-H-D)	5.85" x 7.05" x 0.70"
Dimensions (mm)	148.6 x 179.1 x 17.8
Total Keys	18
Function Keys	-
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## PM-18-HP



5.85" x 8.51" x 0.81" (W-H-D)  
148.6 x 216.2 x 20.6 (mm)

- Panel Mount Rubber Numeric Keypad and HulaPoint™ with Stainless Steel Bezel

Dimensions (W-H-D)	5.85" x 8.51" x 0.81"
Dimensions (mm)	148.6 x 216.2 x 20.6
Total Keys	18
Function Keys	-
Number Pad	10-Key
Storage Temp	-40°C ~ +60°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint™
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## PM-65-TP-SS



16.25" x 5.12" x 1.425" (W-H-D)  
412.8 x 130.0 x 36.2 (mm)

- Panel Mount Stainless Steel Keyboard with Touchpad

Dimensions (W-H-D)	16.25" x 5.12" x 1.425"
Dimensions (mm)	412.8 x 130.0 x 36.2
Total Keys	65
Function Keys	-
Number Pad	-
Storage Temp	-40°C ~ +90°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	USB
Cable Type/Length	7' straight (2.13 m)

## PM-65-TB-SS



16.25" x 5.12" x 1.425" (W-H-D)  
412.8 x 130.0 x 36.2 (mm)

- Panel Mount Stainless Steel Keyboard with Trackball

Dimensions (W-H-D)	16.25" x 5.12" x 1.425"
Dimensions (mm)	412.8 x 130.0 x 36.2
Total Keys	65
Function Keys	-
Number Pad	-
Storage Temp	-20°C ~ +65°C
Operating Temp	0°C ~ +55°C
Sealing	NEMA 4
Integrated Pointer	Trackball
Backlighting	-
Cable	USB
Cable Type/Length	7' straight (2.13 m)

# OEM Keyboard Kits

iKey's OEM kits can be easily integrated into OEM applications. Each kit consists of the keypad, a PCB, and an optional cable.

Dimensions (W-H-D)	15.00" x 6.50" x 0.42"
Dimensions (mm)	381.0 x 165.1 x 10.7
Total Keys	113
Function Keys	20
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- OEM Rubber Keyboard with HulaPoint II™
  - Other Models:
    - \* DT-5K
    - \* PM-5K

## 5K-OEM



15.00" x 6.50" x 0.42" (W-H-D)  
381.0 x 165.1 x 10.7 (mm)

Dimensions (W-H-D)	14.75" x 6.43" x 0.35"
Dimensions (mm)	374.7 x 163.3 x 8.9
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- OEM Rubber Keyboard with HulaPoint II™
  - Other Models:
    - \* DU-5K
    - \* PMU-5K

## DU-5K-OEM



14.75" x 6.43" x 0.35" (W-H-D)  
374.7 x 163.3 x 8.9 (mm)

Dimensions (W-H-D)	15.05" x 6.55" x 0.53"
Dimensions (mm)	382.3 x 166.4 x 13.5
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- OEM Membrane Keyboard with Touchpad
- Hardcoated, Textured Polyester Film Keypad
  - Other Models:
    - \* DT-5K-MEM-TP
    - \* PM-5K-MEM-TP

## KYB-5K-MEM-TP-OEM



15.05" x 6.55" x 0.53" (W-H-D)  
382.3 x 166.4 x 13.5 (mm)

Dimensions (W-H-D)	15.00" x 6.50" x 0.42"
Dimensions (mm)	381.0 x 165.1 x 10.7
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- OEM Rubber Keyboard

## KYB-114-OEM



15.00" x 6.50" x 0.42" (W-H-D)  
381.0 x 165.1 x 10.7 (mm)

# OEM Keyboard Kits

## MEM-114-OEM



15.0" x 6.25" x 0.75" (W-H-D)  
381.0 x 158.8 x 19.1 (mm)

- OEM Membrane Keyboard

Dimensions (W-H-D)	15.0" x 6.25" x 0.75"
Dimensions (mm)	381.0 x 158.8 x 19.1
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

## SL-75-OEM



7.85" x 3.85" x 0.67" (W-H-D)  
199.4 x 97.8 x 16.9 (mm)

- OEM Rubber Keyboard with Backlighting
- Compact Design
  - Other Models:
    - \* SL-75

Dimensions (W-H-D)	7.85" x 3.85" x 0.67"
Dimensions (mm)	199.4 x 97.8 x 16.9
Total Keys	75
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

## SK-79-OEM/SLK-79-OEM



9.00" x 3.60" x 0.45" (W-H-D)  
228.6 x 91.4 x 11.4 (mm)

- OEM Rubber Keyboard with HulaPoint II™
- Ultra-Compact Design
  - Other Models:
    - \* SK-79 / SLK-79
    - \* SK-79-M/SLK-79-M

Dimensions (W-H-D)	9.00" x 3.60" x 0.45"
Dimensions (mm)	228.6 x 91.4 x 11.4
Total Keys	79
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Red LED (SLK-79-OEM only)
Cable	PS/2 or USB
Cable Type/Length	3' straight (0.91 m)

## SL-86-911-OEM



11.12" x 6.05" x 0.72" (W-H-D)  
282.4 x 153.7 x 18.3 (mm)

- OEM Rubber Keyboard with HulaPoint II™ and Backlighting
- One-Touch Emergency Key
  - Other Models:
    - \* SL-86-911
    - \* SLP-86-911

Dimensions (W-H-D)	11.12" x 6.05" x 0.72"
Dimensions (mm)	282.4 x 153.7 x 18.3
Total Keys	86
Function Keys	10
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Red LED
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)



# OEM Keyboard Kits

## DP-88-OEM / SL-88-OEM



11.12" x 6.05" x 0.75" (W-H-D)  
282.5 x 153.7 x 19.1 (mm)

Dimensions (W-H-D)	11.12" x 6.05" x 0.75"
Dimensions (mm)	282.5 x 153.7 x 19.1
Total Keys	88
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED (SL-88-OEM only)
Cable	PS/2 or USB
Cable Type/Length	4' coiled (1.2 m)

- OEM Rubber Keyboard
- Compact Design
  - Other Models:
    - \* DP-88 / SL-88
    - \* PM-88 / SLP-88

## DP-860-OEM



11.12" x 6.05" x 0.75" (W-H-D)  
282.5 x 153.7 x 18.3 (mm)

Dimensions (W-H-D)	11.12" x 6.05" x 0.75"
Dimensions (mm)	282.5 x 153.7 x 18.3
Total Keys	84
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- OEM Rubber Keyboard with HulaPoint II™
- Compact Design
  - Other Models:
    - \* DP-860
    - \* DW-860
    - \* PM-860

## SL-880-OEM



11.10" x 6.10" x 0.42" (W-H-D)  
281.9 x 154.9 x 10.7 (mm)

Dimensions (W-H-D)	11.10" x 6.10" x 0.42"
Dimensions (mm)	281.9 x 154.9 x 10.7
Total Keys	88
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Green LED
Cable	USB
Cable Type/Length	6.7' straight (2 m)

- Industrial Silicone Rubber OEM Keyboard with HulaPoint II™ and Backlighting

## SLK-80-OEM



9.50" x 3.60" x 0.45" (W-H-D)  
241.3 x 91.4 x 11.4 (mm)

Dimensions (W-H-D)	9.50" x 3.60" x 0.45"
Dimensions (mm)	241.3 x 91.4 x 11.4
Total Keys	80
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	Green LED
Cable	USB
Cable Type/Length	6.7' straight (2 m)

- Industrial Silicone Rubber OEM Keyboard with HulaPoint II™
- Designed to meet MIL-STD-461E
  - Other Models:
    - \* SLK-80

# OEM Keyboard Kits

## KYB-81-OEM / SL-81-OEM



11.35" x 5.11" x 0.42" (W-H-D)  
288.3 x 129.8 x 10.7 (mm)

- OEM Rubber Keyboard
- Compact Design
  - Other Models:
    - \* DT-81 / DBL-81
    - \* PM-81 / SLP-81

Dimensions (W-H-D)	11.35" x 5.11" x 0.42"
Dimensions (mm)	288.3 x 129.8 x 10.7
Total Keys	81
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	Red LED (SL-81-OEM only)
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

## KYB-42-KIOSK



9.17" x 4.45" x 0.43" (W-H-D)  
232.9 x 113.0 x 10.9 (mm)

- OEM Kiosk Rubber Keyboard

Dimensions (W-H-D)	9.17" x 4.45" x 0.43"
Dimensions (mm)	232.9 x 113.0 x 10.9
Total Keys	42
Function Keys	-
Number Pad	-
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

## KYB-18-OEM



4.44" x 5.17" x 0.36" (W-H-D)  
112.8 x 131.3 x 9.1 (mm)

- OEM Rubber Number Pad
  - Other Models:
    - \* DT-18
    - \* PM-18

Dimensions (W-H-D)	4.44" x 5.17" x 0.36"
Dimensions (mm)	112.8 x 131.3 x 9.1
Total Keys	18
Function Keys	-
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

# Rackdrawer Keyboards

iKey corners the market on rugged rackdrawer keyboards. Each unit features a 19"-wide rackdrawer with a 1U (1.75") rack height. A standard size rackdrawer has 14" rails (15" deep drawer), and comes with a chrome handle or pull slot. The large rackdrawer has 16" rails (17" deep drawer) and comes with a T-handle or locking T-handle. Each drawer has a CRS steel construction, coated with black epoxy paint, and chrome-plated, ball-bearing slides.

Dimensions (W-H-D)	19" x 15" x 1.75"
Dimensions (mm)	482.6 x 381.0 x 44.5
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 12
Integrated Pointer	-
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Rackdrawer Rubber Keyboard (Pull Slot shown in photo)



## RDC-1000

19" x 15" x 1.75" (W-H-D)  
482.6 x 381.0 x 44.5 (mm)

Dimensions (W-H-D)	19" x 15" x 1.75"
Dimensions (mm)	482.6 x 381.0 x 44.5
Total Keys	101-Key IBM Keyboard
Function Keys	12
Number Pad	10-Key
Sealing	-
Integrated Pointer	HulaPoint™
Backlighting	-
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Rackdrawer with Keyboard and HulaPoint™
- Desktop IBM Keyboard Included (Chrome Handle shown in photo)



## RDC-1535

19" x 15" x 1.75" (W-H-D)  
482.6 x 381.0 x 44.5 (mm)

Dimensions (W-H-D)	19" x 15" x 1.75"
Dimensions (mm)	482.6 x 381.0 x 44.5
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +60°C
Sealing	NEMA 12
Integrated Pointer	HulaPoint™
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Rackdrawer Rubber Keyboard with HulaPoint™ (T-Handle shown in photo)



## RDC-3000

19" x 15" x 1.75" (W-H-D)  
482.6 x 381.0 x 44.5 (mm)

Dimensions (W-H-D)	19" x 15" x 1.75"
Dimensions (mm)	482.6 x 381.0 x 44.5
Total Keys	113
Function Keys	20
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 12
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- Rackdrawer Rubber Keyboard with HulaPoint II™ (T-Handle with Key shown in photo)



## RDC-5K

19" x 15" x 1.75" (W-H-D)  
482.6 x 381.0 x 44.5 (mm)

# Intrinsically Safe and Nonincendive Products

Hazardous environments require equipment designed for safety and reliability. iKey's intrinsically safe (IS) and nonincendive (NI) keyboards and pointing devices meet the required specifications to properly function in potentially volatile locations. Each IS product has Factory Mutual certification for Class I, II, and III, Division I, Groups C, D, E, F and G. Each NI product has Factory Mutual certification for Class I, Division II.

## DT-1000-IS (Intrinsically Safe) DT-1000-NI (Nonincendive)



16.25" x 7.88" x 1.80" (W-H-D)  
412.8 x 200.2 x 45.7 (mm)

- IS / NI Desktop Rubber Keyboard in Stainless Steel Case

Dimensions (W-H-D)	16.25" x 7.88" x 1.80"
Dimensions (mm)	412.8 x 200.2 x 45.7
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2 (or USB for NI only)
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables

## DT-2000-IS (Intrinsically Safe) DT-2000-NI (Nonincendive)



20.25" x 7.88" x 1.80" (W-H-D)  
514.4 x 200.2 x 45.7 (mm)

- IS / NI Desktop Rubber Keyboard with HulaPoint II™ in Stainless Steel Case

Dimensions (W-H-D)	20.25" x 7.88" x 1.80"
Dimensions (mm)	514.4 x 200.2 x 45.7
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 (or USB for NI only)
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables

## DP-860-IS (Intrinsically Safe)



11.40" x 6.30" x 1.86" (W-H-D)  
289.6 x 160.0 x 47.2 (mm)

- IS / NI Desktop Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case

Dimensions (W-H-D)	11.40" x 6.30" x 1.86"
Dimensions (mm)	289.6 x 160.0 x 47.2
Total Keys	84
Function Keys	12
Number Pad	-
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables



# Intrinsically Safe and Nonincendive Products

Dimensions (W-H-D)	14.94" x 6.63" x 1.81"
Dimensions (mm)	379.5 x 168.4 x 45.9
Total Keys	116
Function Keys	20
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 (or USB for NI only)
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables

- IS / NI Desktop Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case

## DU-5K-IS (Intrinsically Safe) DU-5K-NI (Nonincendive)



14.94" x 6.63" x 1.81" (W-H-D)  
379.5 x 168.4 x 45.9 (mm)

Dimensions (W-H-D)	16.25" x 7.88" x 1.80"
Dimensions (mm)	412.8 x 200.2 x 45.7
Total Keys	113
Function Keys	20
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 (or USB for NI only)
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables

- IS / NI Desktop Rubber Keyboard with HulaPoint II™ in Stainless

## DT-5K-IS (Intrinsically Safe) DT-5K-NI (Nonincendive)



16.25" x 7.88" x 1.80" (W-H-D)  
412.8 x 200.2 x 45.7 (mm)

Dimensions (W-H-D)	4.90" x 4.90" x 1.13"
Dimensions (mm)	124.5 x 124.5 x 28.7
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Cable	PS/2 (or USB for NI only)
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables

- IS / NI Desktop Rubber HulaPoint II™ Pointing Device in Stainless Steel Case

## HP-DT-IS (Intrinsically Safe) HP-DT-NI (Nonincendive)



4.90" x 4.90" x 1.13" (W-H-D)  
124.5 x 124.5 x 28.7 (mm)

# Intrinsically Safe and Nonincendive Products

## PM-1000-IS (Intrinsically Safe) PM-1000-NI (Nonincendive)



17.70" x 9.20" x 1.58" (W-H-D)  
449.6 x 233.7 x 40.1 (mm)

- IS / NI Panel Mount Rubber Keyboard in Stainless Steel Bezel

Dimensions (W-H-D)	17.70" x 9.20" x 1.58"
Dimensions (mm)	449.6 x 233.7 x 40.1
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	-
Backlighting	-
Cable	PS/2 (or USB for NI only)
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables

## PM-2000-IS (Intrinsically Safe) PM-2000-NI (Nonincendive)



21.80" x 9.20" x 1.86" (W-H-D)  
553.7 x 233.7 x 47.2 (mm)

- IS / NI Panel Mount Rubber Keyboard with HulaPoint II™ in Stainless Steel Bezel

Dimensions (W-H-D)	21.80" x 9.20" x 1.86"
Dimensions (mm)	553.7 x 233.7 x 47.2
Total Keys	114
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 (or USB for NI only)
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables

## PM-5K-IS (Intrinsically Safe) PM-5K-NI (Nonincendive)



17.70" x 9.20" x 1.58" (W-H-D)  
449.6 x 233.7 x 40.1 (mm)

- IS / NI Panel Mount Rubber Keyboard with HulaPoint II™ in Stainless Steel Bezel

Dimensions (W-H-D)	17.70" x 9.20" x 1.58"
Dimensions (mm)	449.6 x 233.7 x 40.1
Total Keys	113
Function Keys	20
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	PS/2 (or USB for NI only)
Cable Type/Length	5' (1.5m) from keyboard to Bulkhead Connector, 2 separate cables

# Intrinsically Safe and Nonincendive Wireless

iKey's wireless line of intrinsically safe (IS) and nonincendive (NI) keyboards meet the required specifications to properly function in potentially volatile locations. Advantages of wireless products include no connection at the bulkhead, no need for barriers, and the elimination of virtually all configuration issues.

Dimensions (W-H-D)	12.01" x 7.75" x 2.03"
Dimensions (mm)	305.1 x 196.9 x 51.6
Total Keys	87
Function Keys	12
Number Pad	NumLock Access
Storage Temp	-40°C ~ +65°C
Operating Temp	0°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	Touchpad
Backlighting	-
Cable	Wireless

- IS Wireless Bluetooth®-Compatible Rubber Keyboard with Touchpad in ABS Polycarbonate Case
- Compact Design
- Submersible
- 30-foot RF Range
- Requires 2 AA Batteries

## **BT-87-TP-IS** (Intrinsically Safe) **BT-87-TP-NI** (Nonincendive)



12.01" x 7.75" x 2.03" (W-H-D)  
305.1 x 196.9 x 51.6 (mm)

Dimensions (W-H-D)	14.97" x 6.61" x 1.91"
Dimensions (mm)	380.2 x 167.9 x 48.5
Total Keys	116
Function Keys	24
Number Pad	10-Key
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Backlighting	-
Cable	Wireless
Cable Type/Length	USB dongle

- Wireless Rubber Keyboard with HulaPoint II™ in ABS Polycarbonate Case
- 30-foot RF Range – No Line-of-Site Limitations
- Requires 3 AA Batteries – 6 Month Average Battery Life

## **DW-5K-IS** (Intrinsically Safe) **DW-5K-NI** (Nonincendive)



14.97" x 6.61" x 1.91" (W-H-D)  
380.2 x 167.9 x 48.5 (mm)

# Pointing Devices

iKey's rugged and versatile pointing devices range from stainless steel encased trackballs to waterproof optical mice. Options include desktop models, panel mount models and OEM kits.

## DT-OM / DT-OM-FL



DT-OM



DT-OM-FL

- AquaPoint™ Sealed Optical Mouse

Dimensions (W-H-D)	2.58" x 5" x 1.56"
Dimensions (mm)	65.5 x 127.0 x 39.6
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +60°C
Sealing	NEMA 4X
Cable	USB or PS/2 Adapter
Cable Type/Length	6' straight (1.8 m)

## DT-TB



4.0" x 6.0" x 2.0" (W-H-D)  
101.6 x 152.4 x 50.8 (mm)

- Desktop Laser Trackball in Stainless Steel Case
- 38-mm Trackball

Dimensions (W-H-D)	4.0" x 6.0" x 2.0"
Dimensions (mm)	101.6 x 152.4 x 50.8
Storage Temp	-40°C ~ +85°C
Operating Temp	0°C ~ +55°C
Sealing	NEMA 4X
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

## HP-DT




4.90" x 4.90" x 1.13" (W-H-D)  
124.5 x 124.5 x 28.7 (mm)

- Desktop HulaPoint II™ in Stainless Steel Case
- Other Models:
- \* HP-DT-IS
- \* HP-DT-NI

Dimensions (W-H-D)	4.90" x 4.90" x 1.13"
Dimensions (mm)	124.5 x 124.5 x 28.7
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

## HP-PM

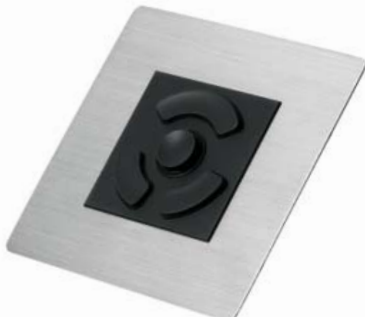

6.0" x 6.0" x 1.12" (W-H-D)  
152.4 x 152.4 x 28.4 (mm)

- Panel Mount HulaPoint II™ in Stainless Steel Bezel

Dimensions (W-H-D)	6.0" x 6.0" x 1.12"
Dimensions (mm)	152.4 x 152.4 x 28.4
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)



# Pointing Devices

Dimensions (W-H-D)	6.0" x 6.0" x 1.78"
Dimensions (mm)	152.4 x 152.4 x 45.2
Storage Temp	-40°C ~ +85°C
Operating Temp	0°C ~ +55°C
Sealing	NEMA 4X
Integrated Pointer	Trackball
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- Panel Mount Laser Trackball in Stainless Steel Bezel
- 38-mm Trackball



6.0" x 6.0" x 1.78" (W-H-D)  
152.4 x 152.4 x 45.2 (mm)

Dimensions (W-H-D)	3.10" x 1.40" x 0.45"
Dimensions (mm)	78.7 x 35.6 x 11.4
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint™
Cable	PS/2 or USB
Cable Type/Length	10' straight (3 m)

- OEM HulaPoint™ Pointing Device



3.10" x 1.40" x 0.45" (W-H-D)  
78.7 x 35.6 x 11.4 (mm)

Dimensions (W-H-D)	3.70" x 3.70" x 0.54"
Dimensions (mm)	94.0 x 94.0 x 13.7
Storage Temp	-40°C ~ +70°C
Operating Temp	-20°C ~ +60°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint II™
Cable	PS/2, USB or STD
Cable Type/Length	10' straight (3 m)

- OEM HulaPoint II™ Pointing Device



3.70" x 3.70" x 0.54" (W-H-D)  
94.0 x 94.0 x 13.7 (mm)

Dimensions (W-H-D)	3.5" x 1.5" x 0.5"
Dimensions (mm)	88.9 x 38.1 x 12.7
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint™
Cable	PS/2 or STD
Cable Type/Length	6' straight (1.8 m)

- OEM HulaPoint™ Pointing Device



3.5" x 1.5" x 0.5" (W-H-D)  
88.9 x 38.1 x 12.7 (mm)

# Pointing Devices / Flat Panel Monitors

## uHP-2020



- OEM HulaPoint™ Pointing Device

Dimensions (W-H-D)	1.80" x 1.90" x 0.98"
Dimensions (mm)	45.7 x 48.3 x 24.9
Storage Temp	-40°C ~ +90°C
Operating Temp	-40°C ~ +70°C
Sealing	NEMA 4X
Integrated Pointer	HulaPoint™
Cable	PS/2 or STD
Cable Type/Length	6' straight (1.8 m)

1.80" x 1.90" x 0.98" (W-H-D)  
45.7 x 48.3 x 24.9 (mm)

iKey's line of high quality, compact, flat panel display monitors are ideal solutions for industrial computing environments. They can be easily integrated into new or existing systems.

## FP15-PM / FP15-PMT



- Flat Panel Monitor with 15.1" display screen
- FP15-PMT Model Features Resistive Touchscreen
- Stainless Steel Bezel
- 1024 x 768 Maximum Screen Resolution
- 350 Nits of Brightness
- 40,000 Hour Backlight Life
- Bracket Mounting
- SVGA AutoSynch

Dimensions (W-H-D)	17.7" x 14.6" x 3.08"
Dimensions (mm)	449.6 x 371.6 x 78.2
Storage Temp	-20°C ~ +60°C
Operating Temp	0°C ~ +50°C
Sealing	NEMA 4X
Cable Type/Length	Monitor: 15 Pin video cable, Touchscreen (FP15-PMT only): 9 Pin serial

17.7" x 14.6" x 3.08" (W-H-D)  
449.6 x 371.6 x 78.2 (mm)

## FP17-PM / FP17-PMT



- Flat Panel Monitor with 17.1" screen
- FP17-PMT Model Features Resistive Touchscreen
- Stainless Steel Bezel
- 1280 x 1024 Maximum Screen Resolution
- 250 Nits of Brightness
- 40,000 Hour Backlight Life
- Stud Mounting
- SVGA AutoSynch

Dimensions (W-H-D)	18.74" x 15.56" x 3.08"
Dimensions (mm)	476.0 x 395.2 x 78.2
Storage Temp	-20°C ~ +60°C
Operating Temp	0°C ~ +50°C
Sealing	NEMA 4X
Cable Type/Length	Monitor: 15 Pin video cable, Touchscreen (FP17-PMT only): 9 Pin serial

18.74" x 15.56" x 3.08" (W-H-D)  
476.0 x 395.2 x 78.2 (mm)

# Cursor Controls

iKey is the authorized U.S. distributor for Cursor Controls, a British company that is the leader in designing and manufacturing robust trackball solutions for medical, military and industrial applications. For more information on Cursor Controls trackballs and options available from iKey, call (800) 866-6506.



- 19-mm Trackball
- Laser Trackball



- 25-mm Trackball
- Laser or Mechanical Trackball



- 38-mm Trackball
- Laser, Optical or Mechanical Trackball



- 50-mm Trackball
- Laser, Optical or Mechanical Trackball



- F60 Military Trackball
- 63-mm
- Ideal for Military Applications


# RAM Mounts

iKey is an authorized distributor of RAM Mounts, the world leader in mounting systems and solutions. RAM Mounts are the perfect fit for mounting iKey's mobile keyboards.


the **models**



- a: RAM-101U-B - 5.24"
- b: RAM-101U - 7.35"
- c: RAM-101U-D - 10.73"
- d: RAM-101U-246
- e: RAM-108BU
- f: RAM-271U-12
- g: RAM-201U
- h: RAM-202U
- i: RAM-101-IN10
- j: RAM-109V-3
- k: RAM-109H-3



4-hole mounting pattern





# Glossary of Terms

**HulaPoint™** – The HulaPoint™ is a pointing device that functions similar to a joystick. Products with the HulaPoint™ have the original version of this pointing device.

**HulaPoint II™** – As with the original HulaPoint™, the HulaPoint II™ pointing device functions similar to a joystick. The HulaPoint II™ is an upgraded pointing device that offers improved sensitivity and increased durability.

**Intrinsically Safe (IS)** – IS keyboards and pointing devices are built for use in hazardous locations. FM Approval requires that no spark or thermal effect produced either normally or in specified fault conditions is capable of causing ignition of a flammable or combustible gas-in-air or vapor-in-air mixture atmosphere under prescribed test conditions. This low energy transfer in the hazardous area is controlled by barriers that the signals pass through in a safe area. Our IS products have a Factory Mutual approval for Class I, II, and III, Division I, Groups C, D, E, F, and G.

**NEMA 4** – NEMA 4 certified products are designed for either indoor or outdoor use, and provide protection against falling dirt, rain, sleet, snow, windblown dust, splashing water, and hose-directed water. NEMA 4 products will also remain undamaged by the external formation of ice on the enclosure.

**NEMA 4X** – NEMA 4X products are designed for either indoor or outdoor use, and provide protection against falling dirt, rain, sleet, snow, windblown dust, and external formations of ice on the enclosure. NEMA 4X certified products are also protected from splashing water, hose-directed water, and are resistant to corrosion.

**NEMA 12** – NEMA 12 products are designed for indoor use, and provide protection against dripping and light splashing of liquids, as well as falling dirt, circulating dust, lint and fibers.

**Nonincendive (NI)** – NI keyboards and pointing devices are built for use in hazardous locations. NI products are incapable of igniting surrounding flammable or explosive gas-in-air or vapor-in-air mixture atmosphere under normal operation according to specified test conditions. Our NI products have a Factory Mutual approval for Class I, Division II, Groups A, B, C, and D.

**NumLock Access** – Keyboards with NumLock Access require pressing the NumLock Key to access the integrated 10-key number pad.

2621 Ridgpoint Drive | Suite 235

Austin, TX 78754

**Tel:** 512-837-0283

**Toll Free:** 800-866-6506

**Fax:** 512-927-8530

