



RP-WR5441

Wireless-N/b/g 4-P AP Router, 1T1R

RP-WR5441 is the wireless 11N Broadband Router dedicated to Small Office/Home Office wireless network solution. It is 4 in 1 network device, which combines wireless access point, firewall, 4-ports Switch and the NAT-Router. Its wireless data transmission rate is up to 150Mbps in 11n mode which enables to support wireless LAN up to 128-bit WEP, WPA/ WPA2 encryption security. RP-WR5441 provides WEB and Remote Management and system log so that network administrators can manage and monitor the network in real time.

The RP-WR5441 comes a hardware WPS (Wi-Fi protected setup) button, which helps you setup a secure wireless network in a snap. The button lets you activate the wireless protection easily


Feature

- Supports 2.4 GHz frequency band, high speed transfer TX/RX rate up to 150 Mbps
- Operation Mode: AP, Client, WDS, AP+WDS & Repeater
- Support DHCP Client, PPPoE Client, Static IP
- Support MAC filtering, IP access control, DNS filter
- Support PPTP and L2TP pass through
- Support UPNP (universal plug and play)
- Support WPS (WI-FI protection setup)
- Support data encryption mode: WEP, WPA, WPA2
- Supports firmware upgrade function via Web

Specification

| | |
|---------------------------|--|
| Standards | <ul style="list-style-type: none"> • IEEE 802.11b, IEEE 802.11g, IEEE 802.11n • IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX |
| Interface | <ul style="list-style-type: none"> • 4 * RJ-45 10/100Mbps LAN Port • 1 * RJ-45 WAN Port • 1 * Detachable 2dbi Antenna • 1 * reset to factory default • 1 * button for WPS |
| Security | <ul style="list-style-type: none"> • 28-bit WEP, WPA/ WPA2 • MAC Filter • IP Access Control • DNS Filter |
| Data Rates | <ul style="list-style-type: none"> • IEEE 802.11b: 1, 2, 5.5 and 11 Mbps • IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • IEEE 802.11n: up to 150Mbps |
| Operating Channels | <ul style="list-style-type: none"> • USA, Canada: 11 channels (2.412GHz-2.462GHz) • Europe: 13 channels (2.412GHz-2.472GHz) • Japan: 14 channels (2.412GHz-2.4835GHz) |
| LED indicators | <ul style="list-style-type: none"> • SYS/ WPS • WAN • LAN |
| Power Supply | <ul style="list-style-type: none"> • External power adapter DC9V |
| Environment | <ul style="list-style-type: none"> • Operating temperature : 0°C to 40°C • Operating Humidity: 10% to 90% (Non-Condensing) |
| Dimension | <ul style="list-style-type: none"> • 183 * 100.2 * 20.5 mm |
| Certification | <ul style="list-style-type: none"> • FCC, CE |

Application

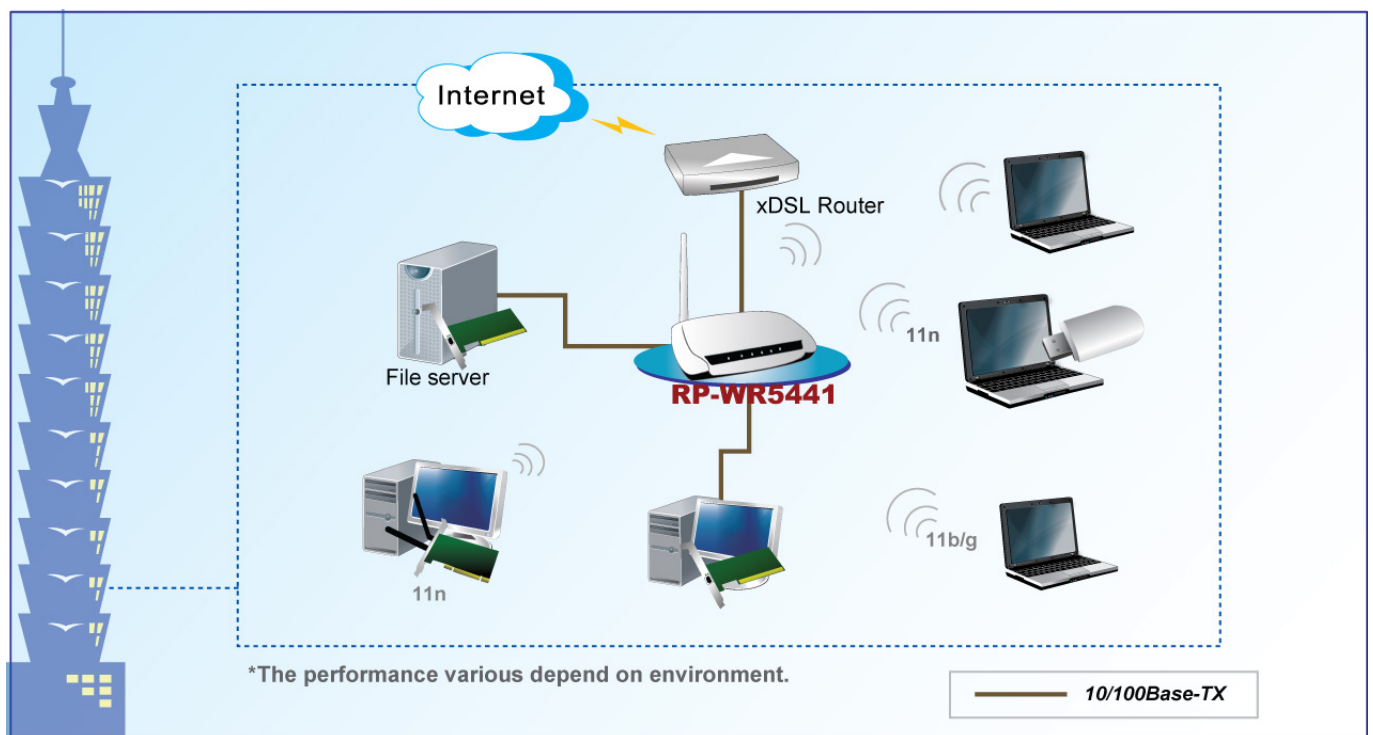

Ordering information

RP-WR5441 Wireless-N/b/g 4-P AP Router, 1T1R