



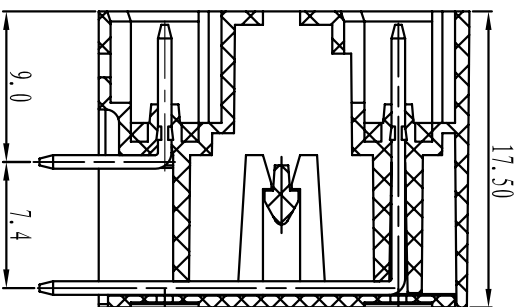


# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
product specification

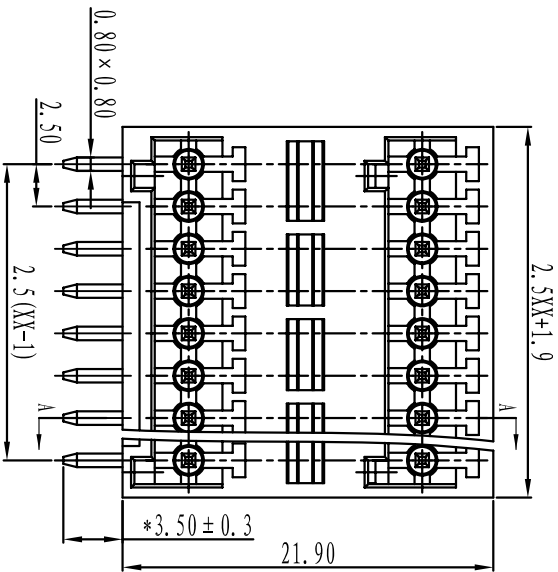


SECTION A-A

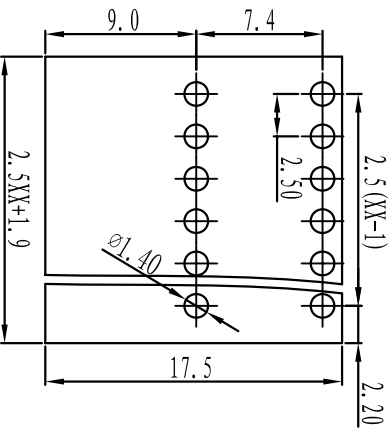

TOLERANCES EXCEPT AS NOTED

订购方式：  
HOW TO ORDER

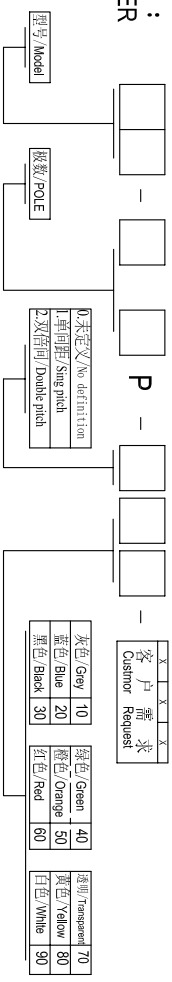

- 电气性能/Electrical**
- 参考标准/Standard: UL IEC
  - 额定电压/Rated voltage: 150V 250V
  - 额定电流/Rated current: 5A 5A
  - 接触电阻/Contact resistance: 20mΩ
  - 耐电压/Withstanding voltage: AC2000V/1Min
  - 绝缘电阻/Insulation resistance: 500MΩ/DC500V
- 机械性能/Mechanical**
- 温度范围/Temp.Range: -40°C~+105°C
  - 瞬间温度/MAX Soldering: +250°C, for 5 Sec
- 尺寸/Dimensions**
- 间距/Pitch: 2.5mm
  - 极数/Poles: 2\*2P-2\*24P
- 材质及电镀/Material**
- 塑件/Housing: PA66, UL94-0
  - 焊针/Pin header: Brass, Tin plated

	linear dimension	fillet	chamfer	short angle sid	≡	—	□	//	⊥
variable range	6 to 30 6 to 30 30 to 120 120 to 480	over 6 to 30 over 30 to 120 over 120 to 480	all to 6	over 6 to 10 over 10 to 50 over 50 to 120	all to 10	to 5	over 5 to 30 over 30 to 120	over 120 to 120	
tolerance	±0.1 to ±0.2 ±0.2 to ±0.3 ±0.3 to ±0.5 ±0.5 to ±0.9	±0.1 to ±0.2 ±0.2 to ±0.3 ±0.3 to ±0.5 ±0.5 to ±0.9	±0.2 to ±0.5	±1 to 1° 30' to 20'	0.5 to 0.125	0.06 to 0.12	0.12 to 0.4		

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	
名称/NAME	WJ115ENGRH-2.5-2*XXP-11"-00A				



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD