





CHATSWORTH PRODUCTS, INC.

Optimize.
Store.
Secure.



Cable Pathway Products

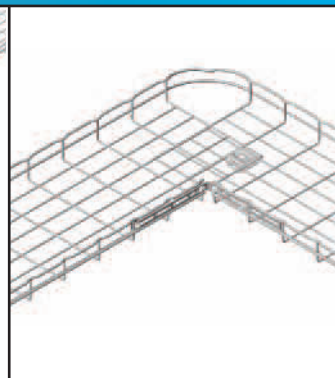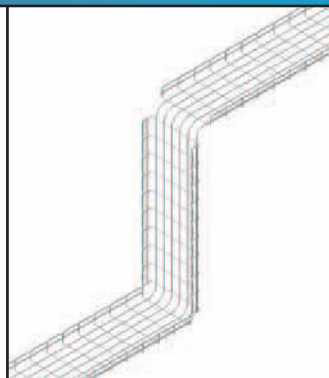

Universal Cable Runway

TELCO-Style Cable Runway


UL Classified Cable Runway

Runway Splices, Turns & Supports

OnTrac™ Wire Mesh Cable Tray

OnTrac™ Splices, Turns & Supports

<p>Application: Use in telecommunication rooms, equipment rooms, and data centers</p>	<p>Application: Supports traditional telephone central office applications</p>	<p>Application: Simplifies the cable runway grounding and bonding process</p>	<p>Application: Connect and support Cable Runway to form a continuous pathway for cables</p>	<p>Application: Use for premise cable distribution and in network equipment rooms and data centers</p>	<p>Application: Connect and support OnTrac Cable Tray to form a continuous pathway for cables</p>
<p>Key Features:</p> <ul style="list-style-type: none"> • Supports horizontal and backbone fiber and copper cables between racks and cabinets • Serves most applications • 9 sizes • No side walls, 1-1/2" (38 mm) high stringers • 12" (300 mm) rung spacing 	<p>Key Features:</p> <ul style="list-style-type: none"> • Use when specifications require cross-member spacing to be on 9" (230 mm) centers • 7 sizes • No side walls, 1-1/2" (38 mm) high stringers • 9" (230 mm) rung spacing 	<p>Key Features:</p> <ul style="list-style-type: none"> • UL Classified for suitability as an equipment grounding conductor only • Splices bond cable runway sections - a separate bonding step is not required • 7 sizes • No side walls, 1-1/2" (38 mm) high stringers • 9" (230 mm) rung spacing 	<p>Key Features:</p> <ul style="list-style-type: none"> • Support cable runway from the ceiling, wall, floor or tops of racks and cabinets • Connect Cable Runway end-to-end with Butt Splice Kits • Create 90° L- or T-shaped intersections with Junction Splice Kits • Use E-Bends and Corner Brackets to make smooth turns • Change elevations with Radius Bends • Add Cable Retaining Posts when cables are stacked over 2" (50 mm) high • Use Radius Drop wherever cables exit the pathway 	<p>Key Features:</p> <ul style="list-style-type: none"> • Support horizontal and backbone fiber and copper cables overhead or under (raised) access floors • UL Classified for suitability as an equipment grounding conductor only • 22 sizes • Side Walls: 2" (50 mm), 4" (100 mm) or 6" (150 mm) high • 2" x 4" (50 mm x 100 mm) wire mesh 	<p>Key Features:</p> <ul style="list-style-type: none"> • Support OnTrac Wire Mesh Cable Tray from the ceiling, wall, floor or the tops of racks and cabinets • Use above drop ceilings or below raised access floors • Cut and form OnTrac Wire Mesh Cable Tray to create smooth turns and changes in elevation • Use splice kits to bolt and electrically bond sections of wire mesh tray together • Support from the ceiling with Edge Hanger, Trapeze Support Bracket or Center Support Bracket • Support from the wall with Wall-Mount Angle, Triangle Support Bracket or L-Support Bracket • Support from the floor with Under Floor Support, Pedestal Clamp Bracket or Pedestal Clamp Support Kit
<p>Widths (9):</p> <ul style="list-style-type: none"> • 4" (100 mm) • 6" (150 mm) • 9" (230 mm) • 12" (300 mm) • 15" (380 mm) • 18" (460 mm) • 24" (610 mm) • 30" (760 mm) • 36" (910 mm) 	<p>Widths (7):</p> <ul style="list-style-type: none"> • 6" (150 mm) • 9" (230 mm) • 10" (250 mm) • 12" (300 mm) • 15" (380 mm) • 18" (460 mm) • 20" (510 mm) 	<p>Widths (7):</p> <ul style="list-style-type: none"> • 6" (150 mm) • 9" (230 mm) • 12" (300 mm) • 15" (380 mm) • 18" (460 mm) • 20" (510 mm) • 24" (610 mm) 		<p>Widths (8):</p> <ul style="list-style-type: none"> • 4" (100 mm) • 6" (150 mm) • 8" (200 mm) • 12" (300 mm) • 16" (400 mm) • 18" (450 mm) • 20" (500 mm) • 24" (600 mm) 	
<p>Length:</p> <ul style="list-style-type: none"> • 119.5" (3035 mm) • 9' - 11.5" (3 m) 	<p>Length:</p> <ul style="list-style-type: none"> • 116.5" (2939 mm) • 9' - 8.5" (2.9 m) 	<p>Length:</p> <ul style="list-style-type: none"> • 116.5" (2959 mm) • 9' - 8.5" (2.9 m) 		<p>Length:</p> <ul style="list-style-type: none"> • 120" (3048 mm) • (10'L) (3 m) 	
<p>Support Spacing:</p> <ul style="list-style-type: none"> • Every 5' (1.5 m) of span and within 2' (0.6 m) of any intersection 	<p>Support Spacing:</p> <ul style="list-style-type: none"> • Every 5' (1.5 m) of span and within 2' (0.6 m) of any intersection 	<p>Support Spacing:</p> <ul style="list-style-type: none"> • Every 5' (1.5 m) of span and within 2' (0.6 m) of any intersection 		<p>Support Spacing:</p> <ul style="list-style-type: none"> • Every 5' (1.5 m) of span and within 2' (0.6 m) of any intersection 	
<p>Construction:</p> <ul style="list-style-type: none"> • Welded steel, painted finish 	<p>Construction:</p> <ul style="list-style-type: none"> • Welded steel, painted finish 	<p>Construction:</p> <ul style="list-style-type: none"> • Welded steel, zinc-plated finish 	<p>Construction:</p> <ul style="list-style-type: none"> • Welded or formed steel, zinc-plated or painted finish 	<p>Construction:</p> <ul style="list-style-type: none"> • Welded steel, zinc-plated, pre-galvanized or black painted finish 	<p>Construction:</p> <ul style="list-style-type: none"> • Welded or formed steel, zinc-plated or black painted finish




Universal Cable Runway

Part No.	Description	Wt.
10250-X04	1.5"H x 4"W x 9'-11.5"L 38 mm x 100 mm x 3 m	18 lb 8.2 kg
10250-X06	1.5"H x 6"W x 9'-11.5"L 38 mm x 150 mm x 3 m	19 lb 8.6 kg
10250-X09	1.5"H x 9"W x 9'-11.5"L 38 mm x 230 mm x 3 m	20 lb 9.1 kg
10250-X12	1.5"H x 12"W x 9'-11.5"L 38 mm x 300 mm x 3 m	25 lb 11.3 kg
10250-X15	1.5"H x 15"W x 9'-11.5"L 38 mm x 380 mm x 3 m	27 lb 12.2 kg
10250-X18	1.5"H x 18"W x 9'-11.5"L 38 mm x 460 mm x 3 m	29 lb 13.2 kg
10250-X24	1.5"H x 24"W x 9'-11.5"L 38 mm x 610 mm x 3 m	32 lb 14.5 kg
10250-X31	1.5"H x 30"W x 9'-11.5"L 38 mm x 760 mm x 3 m	35 lb 15.7 kg
10250-X37	1.5"H x 36"W x 9'-11.5"L 38 mm x 910 mm x 3 m	38 lb 17.2 kg

Note: X=Color: (-1)=Gray, (-2)=White and (-7)=Black.

Key Accessories

Part No.	Description	Wt.
11301-001	Butt-Splice Kit	1 lb 0.5 kg
11302-001	Junction-Splice Kit	1 lb 0.5 kg
11959-X15	Corner Bracket, 15"W (380 mm)	4 lb 1.8 kg
10822-X12	E-Bend, 12"W (300 mm)	12 lb 5.4 kg
10723-X12	Outside Radius Bend, 12"W (300 mm)	4 lb 1.8 kg
10724-X12	Inside Radius Bend, 12"W (300 mm)	4 lb 1.8 kg
10596-X08	Cable Retaining Post, 8"H (200 mm)	1 lb 0.5 kg
12100-X06	Radius Drop, 6"W (150 mm)	2 lb 0.9 kg
13392-712	Cable Runway Dividers Pack of 25	1 lb 0.5 kg
13394-X04	Patch Rack, 4U x 19"W w/Cross-Member Brackets	4 lb 1.8 kg
13395-X04	Patch Rack, 4U x 19"W w/Side Stringer Brackets	5 lb 2.3 kg




TELCO-Style Cable Runway

Part No.	Description	Wt.
11252-X06	1.5"H x 6"W x 9'-8.5"L 38 mm x 150 mm x 2.9 m	22 lb 10.0 kg
11252-X09	1.5"H x 9"W x 9'-8.5"L 38 mm x 230 mm x 2.9 m	24 lb 10.9 kg
11252-X10	1.5"H x 10"W x 9'-8.5"L 38 mm x 250 mm x 2.9 m	24 lb 10.9 kg
11252-X12	1.5"H x 12"W x 9'-8.5"L 38 mm x 300 mm x 2.9 m	26 lb 11.8 kg
11252-X15	1.5"H x 15"W x 9'-8.5"L 38 mm x 380 mm x 2.9 m	26 lb 11.8 kg
11252-X18	1.5"H x 18"W x 9'-8.5"L 38 mm x 460 mm x 2.9 m	28 lb 12.7 kg
11252-X20	1.5"H x 20"W x 9'-8.5"L 38 mm x 510 mm x 2.9 m	30 lb 13.6 kg

Note: X=Color: (-1)=Gray, (-2)=White and (-7)=Black.

Key Accessories

Part No.	Description	Wt.
11301-001	Butt-Splice Kit	1 lb 0.5 kg
11302-001	Junction-Splice Kit	1 lb 0.5 kg
11959-X15	Corner Bracket, 15"W (380 mm)	4 lb 1.8 kg
10822-X12	E-Bend, 12"W (300 mm)	12 lb 5.4 kg
10723-X12	Outside Radius Bend, 12"W (300 mm)	4 lb 1.8 kg
10724-X12	Inside Radius Bend, 12"W (300 mm)	4 lb 1.8 kg
10596-X08	Cable Retaining Post, 8"H (200 mm)	1 lb 0.5 kg
13392-712	Cable Runway Dividers	1 lb 0.5 kg
13394-X04	Patch Rack, 4U x 19"W w/Cross-Member Brackets	4 lb 1.8 kg
13395-X04	Patch Rack, 4U x 19"W w/Side Stringer Brackets	5 lb 2.3 kg




UL Classified Cable Runway

Part No.	Description	Wt.
11275-X06	1.5"H x 6"W x 9'-8.5"L 38 mm x 150 mm x 2.9 m	19 lb 8.6 kg
11275-X09	1.5"H x 9"W x 9'-8.5"L 38 mm x 230 mm x 2.9 m	20 lb 9.1 kg
11275-X12	1.5"H x 12"W x 9'-8.5"L 38 mm x 300 mm x 2.9 m	22 lb 10.0 kg
11275-X15	1.5"H x 15"W x 9'-8.5"L 38 mm x 380 mm x 2.9 m	26 lb 11.8 kg
11275-X18	1.5"H x 18"W x 9'-8.5"L 38 mm x 460 mm x 2.9 m	28 lb 12.7 kg
11275-X20	1.5"H x 20"W x 9'-8.5"L 38 mm x 510 mm x 2.9 m	29 lb 13.2 kg
11275-X24	1.5"H x 24"W x 9'-8.5"L 38 mm x 610 mm x 2.9 m	31 lb 14.1 kg

Note: X=Color over Zinc: (-0)=Gold and (-7)=Black.


Key Accessories

Part No.	Description	Wt.
16301-001	Butt-Splice Kit	1 lb 0.5 kg
16302-001	Junction-Splice Kit	1 lb 0.5 kg
11959-015	Corner Bracket, 15"W (380 mm)	4 lb 1.8 kg
10822-X12	E-Bend, 12"W (300 mm)	12 lb 5.4 kg
10723-X12	Outside Radius Bend, 12"W (300 mm)	4 lb 1.8 kg
10724-X12	Inside Radius Bend, 12"W (300 mm)	4 lb 1.8 kg
10596-X08	Cable Retaining Post, 8"H (200 mm)	5 lb 2.3 kg
13392-712	Cable Runway Dividers	1 lb 0.5 kg
13394-X04	Patch Rack, 4U x 19"W w/Cross-Member Brackets	4 lb 1.8 kg
13395-X04	Patch Rack, 4U x 19"W w/Side Stringer Brackets	5 lb 2.3 kg



Runway Splices, Turns & Supports


Part No.	Description	Wt.
Triangle Support Bracket		
11746-X12	Wall Support, Side, for 12"W (300 mm) Runway	5 lb 2.3 kg
11746-X18	Wall Support, Side, for 18"W (460 mm) Runway	8 lb 3.6 kg
11746-X24	Wall Support, Side, for 24"W (610 mm) Runway	9 lb 4.1 kg
Wall Angle Support Kit		
11421-X12	Wall Support, End, for 12"W (300 mm) Runway	3 lb 1.4 kg
11421-X18	Wall Support, End, for 18"W (460 mm) Runway	5 lb 2.3 kg
11421-X24	Wall Support, End, for 24"W (610 mm) Runway	6 lb 2.7 kg
Center Support Kit		
12362-X12	Ceiling Support, for 12"W (300 mm) Runway	2 lb 0.9 kg
12362-X18	Ceiling Support, End, for 18"W (460 mm) Runway	4 lb 1.8 kg
12362-X24	Ceiling Support, End, for 24"W (610 mm) Runway	5 lb 2.3 kg
3" Channel Rack-To-Runway Mounting Plate		
10595-X12	Rack-Top Support, for 12"W (300 mm) Runway	5 lb 2.3 kg
10595-X18	Rack-Top Support, for 18"W (460 mm) Runway	7 lb 3.2 kg
12408-X24	Rack-Top Support, for 24"W (610 mm) Runway	4 lb 1.8 kg
<i>(-024) not available. Use with CPI Standard and Universal Racks.</i>		
Elevation Kit for 2-Post Racks		
10506-X02	Elevates Runway, 2"H (50 mm), 2.5"H (64 mm) or 3"H (80 mm)	2 lb 0.9 kg
10506-X06	Elevates Runway, 4"H (100 mm), 5"H (130 mm) or 6"H (150 mm)	5 lb 2.3 kg
<i>Use with Rack-To-Runway Mounting Plate.</i>		
<i>Note: X=Color: (-0)=Gold, (-1)=Gray, (-2)=White and (-7)=Black.</i>		
<i>Contact Tech Support at 800-834-4969 for assistance specifying splices and supports.</i>		



OnTrac™ Wire Mesh Cable Tray

Part No.	Description	Wt.
34811-504	2"H x 4"W x 10'L 50 mm x 100 mm x 3 m	11 lb 5.0 kg
34811-506	2"H x 6"W x 10'L 50 mm x 150 mm x 3 m	12 lb 5.4 kg
34811-508	2"H x 8"W x 10'L 50 mm x 200 mm x 3 m	14 lb 6.4 kg
34811-512	2"H x 12"W x 10'L 50 mm x 300 mm x 3 m	17 lb 7.7 kg
34811-516	2"H x 16"W x 10'L 50 mm x 400 mm x 3 m	20 lb 9.1 kg
34811-518	2"H x 18"W x 10'L 50 mm x 460 mm x 3 m	21 lb 9.5 kg
34811-520	2"H x 20"W x 10'L 50 mm x 510 mm x 3 m	23 lb 10.6 kg
34811-524	2"H x 24"W x 10'L 50 mm x 610 mm x 3 m	26 lb 11.8 kg
34821-504	4"H x 4"W x 10'L 100 mm x 100 mm x 3 m	14 lb 6.4 kg
34821-506	4"H x 6"W x 10'L 100 mm x 150 mm x 3 m	16 lb 7.3 kg
34821-508	4"H x 8"W x 10'L 100 mm x 200 mm x 3 m	18 lb 8.7 kg
34821-512	4"H x 12"W x 10'L 100 mm x 300 mm x 3 m	21 lb 9.5 kg
34821-516	4"H x 16"W x 10'L 100 mm x 400 mm x 3 m	24 lb 10.9 kg
34821-518	4"H x 18"W x 10'L 100 mm x 460 mm x 3 m	25 lb 11.3 kg
34821-520	4"H x 20"W x 10'L 100 mm x 510 mm x 3 m	27 lb 12.2 kg
34821-524	4"H x 24"W x 10'L 100 mm x 610 mm x 3 m	30 lb 13.6 kg
34831-508	6"H x 8"W x 10'L 150 mm x 200 mm x 3 m	22 lb 10.0 kg
34831-512	6"H x 12"W x 10'L 150 mm x 300 mm x 3 m	25 lb 11.3 kg
34831-516	6"H x 16"W x 10'L 150 mm x 400 mm x 3 m	28 lb 12.7 kg
34831-518	6"H x 18"W x 10'L 150 mm x 460 mm x 3 m	29 lb 13.2 kg
34831-520	6"H x 20"W x 10'L 150 mm x 510 mm x 3 m	31 lb 14.1 kg
34831-524	6"H x 24"W x 10'L 150 mm x 610 mm x 3 m	34 lb 15.4 kg

Note: The above OnTrac Wire Mesh Cable Tray part numbers have a zinc electroplate finish. Pre-galvanized (-6XX) and black painted finish (-7XX) are also available.

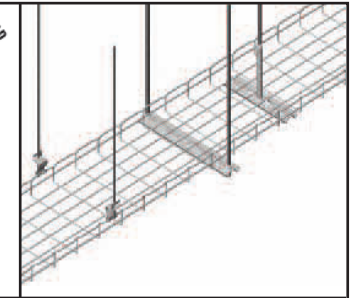

OnTrac™ Splices, & Supports

Part No.	Description	Wt.
34738-501	Standard Splice Kit, 50 Pk	11 lb 5.0 kg
34740-501	90° Splice Bar Kit	2 lb 0.9 kg
<i>Note: Use Standard Splice Kit to make turns and end-to-end connections. Use 90° Splice Bar Kit to make (1) T-splice or (2) L-splices.</i>		
34730-512	Trapeze Support Brkt, 12"W (300 mm)	2 lb 0.9 kg
34730-524	Trapeze Support Brkt, 24"W (610mm)	3 lb 1.4 kg
34735-512	Wall-Mount Angle, 12"W (300 mm)	1 lb 0.5 kg
34735-524	Wall-Mount Angle, 24"W (610mm)	2 lb 0.9 kg
34733-512	Triangle Support Brkt, 12"W (300 mm)	2 lb 0.9 kg
34733-524	Triangle Support Brkt, 24"W (610mm)	4 lb 1.8 kg
34737-502	Pedestal Clamp Support Kit, 2' (0.6 m) Floor	4 lb 1.8 kg
<i>Note: Support Trapeze Support Bracket with 3/8" threaded rod and hardware. Attach Wall-Mount Angle with 1/4" hardware. Attach Triangle Support Bracket with 3/8" hardware. Pedestal Clamp Support Kit attaches to 1" to 2" round or square pedestals.</i>		
Key Accessories		
Part No.	Description	Wt.
34741-501	Toolless Radius Drop, 5.9"W (150 mm)	1 lb 0.5 kg
34838-001	Split Bolt Grounding Clamp, 10 Pack	1 lb 0.5 kg
34749-001	Label Holder, 10 Pack	1 lb 0.5 kg
34839-001	Cable Tray Cutting Tool	6 lb 2.7 kg
<i>Note: Other supports are available.</i>		
<i>Contact Tech Support at 800-834-4969 for assistance specifying splices and supports.</i>		