

FIELD NOTES

Of the survey of the Exterior L

Lines of T^s. 2 N. R^s. 32 & 33 E., T^s. 4 N. R^s. 34 & 35

E. & T^s. 3 N. R^s. 33. 34. 35 & 36 E., Willamette Meridian, Oregon,

as surveyed by Jas. P. Currier & Jas. E. Nolan

U. S. Deputy Surveyors, under ^{their} his Contract No. Special

dated May 4th, 1887.

Survey commenced, July 27th, 1887.

Survey completed, Sept 10th, 1887.

NAMES AND DUTIES OF ASSISTANTS.

L. J. Wooley, Compassman.

Frank Belshaw, Chainman.

Guy Davis, Chainman.

W. H. Medley, Chainman.

J. S. Medley, Chainman.

Barney Coomer, Axman.

J. R. Gadley, Axman.

, Flagman.

PRELIMINARY OATHS OF ASSISTANTS.

We, J. S. Medley, W. H. Medley, Frank Belshaw & Guy Davis

do solemnly swear that we will faithfully execute the duties of Chain Carriers; that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in the survey

of the Exterior Lines of T. 2 N. R. 32 & 33 E. T. 4 N. R. 34 & 35 E. lines of T. 3 N. R. 33. 34. 35 & 36 East. Willamette Meridian, Oregon.

J. S. Medley, Chainman.
W. H. Medley, Chainman.
Frank Belshaw, Chainman.
Guy Davis, Chainman.

Subscribed and sworn to before me this 14th day of June, 1887



James P. Currin, U.S. Deputy Surveyor.


We, B. B. Cronner and H. Beach

do solemnly swear that we will well and truly perform the duties of Axmen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the

Exterior Lines of T. 2 N. R. 32 & 33 E. T. 4 N. R. 34 & 35 E. T. 3 N. R. 33. 34. 35 & 36 E. Willamette Meridian, Oregon.

B. B. Cronner, Axman.
H. Beach, Axman.

Subscribed and sworn to before me this 14th day of June, 1887

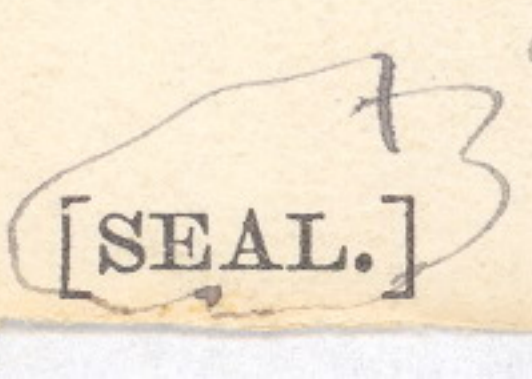

James P. Currin, U.S. Deputy Surveyor.

Extracors of T. 4 North R. 34 East

Willamette Meridian, Oregon.

South on E. bdy Dec 36
Var. 190 45' E

12.45 Leave field

24.25* Wagon Road Course N.W. 1/4 E.

40.00 Deposited a charred stake 12 ins
in the ground for 1/4 Sec Cor dug pits
18x18x12 ins N. 1/4 of Cor 5 1/2 ft dist
and raised a mound of earth 1 1/2 ft
high. 3 1/2 ft base over it, in N Pit
drove a stake 2 ft long 2 ins sq 12 ins
in the ground, marked ^{S on} 1/4 N. face

49.00* Road Course N. 1/4

80.00 Set a post 5 1/4 x 4 x 4 ins 12 ins in the
ground for Cor to, Tps. 3 + 4 N. R 34
+ 35. East marked, D. 4 N. R 34 E,
D. 36, on N.W. R 35 E, D. 31, on N.E. T.
3 N. D. 6, on S.E. Dec. 1, on S.W. with
6 notches on each edge, dug pits
24x18x12 ins long thurs'e on each line
N. S. E. W. of post 6 ft dist & raised a
mound of earth 2 1/2 ft high. 5 ft base
around post Land level. Soil 1st rate
Some grass.

Extensions of T. 4 North R. 34 East
Willamette Meridian, Oregon.

(8093-10 M.)

From Con to Tps. 34 N. R. 34 & 35 E,
From W on random bet Tps. 34 & 35 N,
R 34 E. = Var. $19^{\circ} 45' E$

Set temporary half mile and
mile corners at each 40 & 80 Chs. at
3 miles I found the Cor to Secs
3, 4, 33 & 34 to be 40 less N of line
From this Cor which is a post in earth
'mound with pits, I run $S 89^{\circ} 54' E$
on true line bet Sec 3 & 34,
Var $21^{\circ} E$.

1350 Intersect W R. bdy at meander Cor
Set a basalt stone $9 \times 8 \times 7$ ins, 6 ins
in the ground for meander Cor to frac-
tional Secs. 3 & 34, marked W R. M.
C., Dug a pit 3 ft square and 1 ft deep
S 1/4 S. E. of Cor and raised a mound
of earth 2 ft high $4 \frac{1}{2}$ ft base alongside
4000 Set a post $36 \times 3 \times 3$ ins, 12 ins in
the ground for 1/4 Sec Cor marked
1/4 S. N. at face. Dug pits $78 \times 18 \times 12$ ins

Excavations of T. 4 North R. 34 East

Willamette Meridian, Oregon.

Cor. of Cor 5 1/2 ft dist. raised a mound of earth 1 1/2 ft high 3 1/2 ft base around post

42.75 Walla Walla Branch. R.R. Course NW,

44.50 Wagon Road

80.00 Set a base of 10 x 8 x 7 ins in the ground for Cor to Decs, 2, 3, 34 & 35 marked 2 notches on E. + 4 notches on W edges. dug pits 7 8 x 18 x 12 ins in each Dec. 5 1/2 ft dist and raised a mound of earth 2 ft high 4 1/2 ft base along side,

Land level,

Soil 1st rate

Some grass.

Aug 17 - 1887

Exteriors of T. 4 North R. 34 East
Willamette Meridian, Oregon.

(8093-10 M.)

South $89^{\circ}54'$ E. on true line out bdy
Sec. 2,

Var 20° East

3,50

Wagon Road Course A.W.

2000

Deposited a charred stake, 12 ins in
the ground for $\frac{1}{16}$ Sec Cor, dug pits 18×18
 $\times 12$ ins E.W. of cor $5\frac{1}{2}$ ft dist and
raised a mound of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$
ft base over it. In E. pit drove a
stake 2 ft long, 2 ins square 12 ins in
the ground marked $\frac{1}{16}$ on its face

40,00

Set a basalt stone $12 \times 10 \times 8$ ins 8 ins in
the ground for $\frac{1}{4}$ Sec Cor, marked $\frac{1}{4}$
on its face dug pits $18 \times 18 \times 12$ ins E.W.
of cor $5\frac{1}{2}$ ft dist raised a mound of
earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base alongside

60,00

Deposited a charred stake 12 ins in
the ground for $\frac{1}{16}$ Sec Cor, dug pits
 $18 \times 18 \times 12$ ins E.W. of cor $5\frac{1}{2}$ ft dist
and raised a mound of earth $1\frac{1}{2}$ ft
high $3\frac{1}{2}$ ft base over it. In E. pit.

Extensions of T. B. North R. 34 East
Willamette Meridian, Oregon.

drove a stake 2 ft long 2 ins square
12 ins in the ground marked ¹¹⁶ on
N face

7880 Enter field

80,00 Set a post 48 x 4 x 4 ins 12 ins in the
ground for Cor to Secs. 1, 2, 35, 36
marked, R. 34 E. S. 36 on N. E. S. 1
on S. E. S. 36 N. 2 on S. W. S. 36 N. 2
on N. W. ^{faces} with 5 notches on W +
1 notch on E edges, dug pits
18 x 18 x 12 in each Sec 5 1/2 ft dist
raised a mound of earth 2 ft high
4 1/2 ft base around post

Land rolling

Soil 1st rate Same Grass

South 89° 54' E. on true line on N bdy
Sec 1

Var 21° E.

20,00 Deposited a charred stake 12 ins in
the ground for ¹¹⁶ Sec Cor dug pits 18 x
18 x 12 ins Cor. W. of Cor 5 1/2 ft dist

Extensions of T. 4 North R. 34 East

Willamette Meridian, Oregon.

(8093-10 M.)

and raised a mound of earth $1\frac{1}{2}$ ft high, $3\frac{1}{2}$ ft base over it. In E. pit drove a stake 2 ft long 2 ins square 1 2 ins in the ground, marked $\frac{1}{16}$ on it face

40,00 Deposited a charred stake 1 2 ins in the ground for $\frac{1}{4}$ Sec Cor dug pits $18 \times 18 \times 12$ ins E. & W. of Cor $5\frac{1}{2}$ ft dist and raised a mound of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it. In E. Pit drove a stake 2 ft long 2 ins sq. 1 2 ins in the ground marked $\frac{1}{4}$ on it face

6000 Deposited a charred stake 1 2 ins in the ground for $\frac{1}{16}$ Sec Cor dug pits $18 \times 18 \times 12$ ins E. & W. of Cor $5\frac{1}{2}$ ft dist and raised a mound of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it. In E. pit drove a stake 2 ft long 2 ins sq. 1 2 ins in the ground marked $\frac{1}{16}$ on it face

49.37 Leave field

Ex levions of T. 4 North R. 34 East

Willamette Meridian, Oregon.

80.00 Do Con to Tps. 3 & 4, N. R's. 34 & 35 E,
Land rolling
Soil 1st rate
Good grass Aug 17 - 1887

General Description

This Township is rolling
Soil 1st-rate most of it in
cultivation - There is a fine
grove of Cotton wood on wild
horse creek with scattering Thorn
& willow - Poor grass

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Gas. P. Currier & Gas. E. Poland, U. S. Deputy Surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of the Exterior lines of T. 2 N. R. 32 & 33 E. lines of T. 4 N. R. 34 & 35 E. & T. 3 N. R. 33, 34, 35 & 36 E. Willamette Meridian, Oregon, showing the respective capacities in which they acted:

- L. J. Woolley, Compassman.
- Frank Belshaw, Chainman.
- Guy Davis, Chainman.
- H. J. Medley, Chainman.
- J. S. Medley, Chainman.
- Barny Crommer, Axman.
- J. R. Hadley, Axman.
- _____, Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted Gas. P. Currier & Gas. E. Poland, U. S. Deputy Surveyor, in surveying all those parts or portions of the Exterior lines of T. 2 N. R. 32 & 33 E. T. 4 N. R. 34 & 35 E. & T. 3 N. R. 33, 34, 35 & 36 E. Willamette Meridian, Oregon, as represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- L. J. Woolley, Compassman.
- J. S. Medley, Chainman.
- H. J. Medley, Chainman.
- Frank Belshaw, Chainman.
- Guy Davis, Chainman.
- B. B. Crommer, Axman.
- J. R. Hadley, Axman.
- _____, Flagman.

Subscribed and sworn to before me this 30th day of Sept, 1887.

[SEAL.]

James P. Currier
U. S. Surveyor

FINAL OATH OF DEPUTY SURVEYOR.

I, James P. Leurrin & James E. Toland, United States
 Deputy Surveyor, do solemnly swear that in pursuance of instructions
 received from Douglas H. Taylor, U. S.
 Surveyor General for Oregon, bearing date of the 13th
 day of May, 1887^{vol}, I have well, faithfully,
 and truly, in my own proper person, and in strict conformity with the
 instructions furnished by the U. S. Surveyor General for Oregon, the
 Surveying Manual, and the laws of the United States, surveying all
 those parts or portions of the Exterior Lines of T. 2 N. R. 32 & 33

& T. 4 N. R. 34 & 35 E. & T. 3 N. R. 33. 34. 35 & 36 E.

Willamette Meridian, in the State of Oregon, as are represented in the
 foregoing field notes as having been surveyed by me and under my
 directions; and I do further solemnly swear that all the corners of said
 survey have been established and perpetuated in strict accordance with
 the Surveying Manual, printed instructions, the special written instruc-
 tions of the U. S. Surveyor General for Oregon, and in the specific man-
 ner described in the field notes, and that the foregoing are the *true* field
 notes of such survey, and should any fraud be detected I will suffer the
 penalty of perjury under the provisions of an act of Congress approved
 August 8, 1846.

James P. Leurrin James E. Toland
 U. S. Deputy Surveyor.

Subscribed and sworn to before me this Fifteenth
 day of February, 1888

Alfred Woodcock
 Notary Public
 for Oregon

Office of U. S. Surveyor General,

Portland, Oregon, June 19th, 1888.The ^{foregoing} following Field Notes of the Survey of the

Esterior lines of T. 2 N Rqs

32 + 33 E. T. 4 N Rqs 34 + 35. E

and T. 3 N. Rqs 33 34 35 + 36 East

Will May Or.

executed by James J. Currier and James E. Nolan
Special Joint U. S. Dept. Surveyors.
under his Contract No. _____, dated May4th, 1887, having been critically examined,the necessary corrections and explanations made, the
said Field Notes and the survey they describe, are
hereby approved.

Douglas W. Taylor -

Surveyor General.