

Sircle POS Dejavoo Z11

Initial Setup of the Dejavoo Z11

Plug the power cable into the outlet and power on the device.

Connect the device to your network via Ethernet/WiFi.

Press the green “OK” button and type in the default password “1234” Press “Utility” and type in the default password again.

Press “Communications” then “Print Details”.

Click “Local Parameters” then “Wifi” or “Ethernet”, whichever you're connected to.

This report will tell you your IP address. Keep this handy as we will need it

later.

```
Communication Report
*****
01/13/2016          0:35
*****
Local Settings
*****
WiFi
*****
SSID                intlpos2013
Mode                 DHCP
Addr                 10.0.0.3
Netmask
Broadcast
Gateway              10.0.0.1
DNS1                 10.0.0.1
DNS2
Active interface setup
DHCP Mode           On
MAC                 44:39:C4:2E:E7:80
Addr                 10.0.0.61
Netmask              255.255.255.0
Gateway              10.0.0.1
```

Setup with Sircle POS

Open the POS software and click settings, then “Payment Processing”.


Uncheck “Express Checkout” if selected, and open “Other Payment Processing”.

In the drop down menu select “dejavoov8s”.

Once completed, hit the back button on your tablet until you are back at the initial settings screen.

Select “Payment Device Setup”, then select “Dejavoo V8s”.

Enter the IP address that printed out earlier, and type **8443** for the port number.

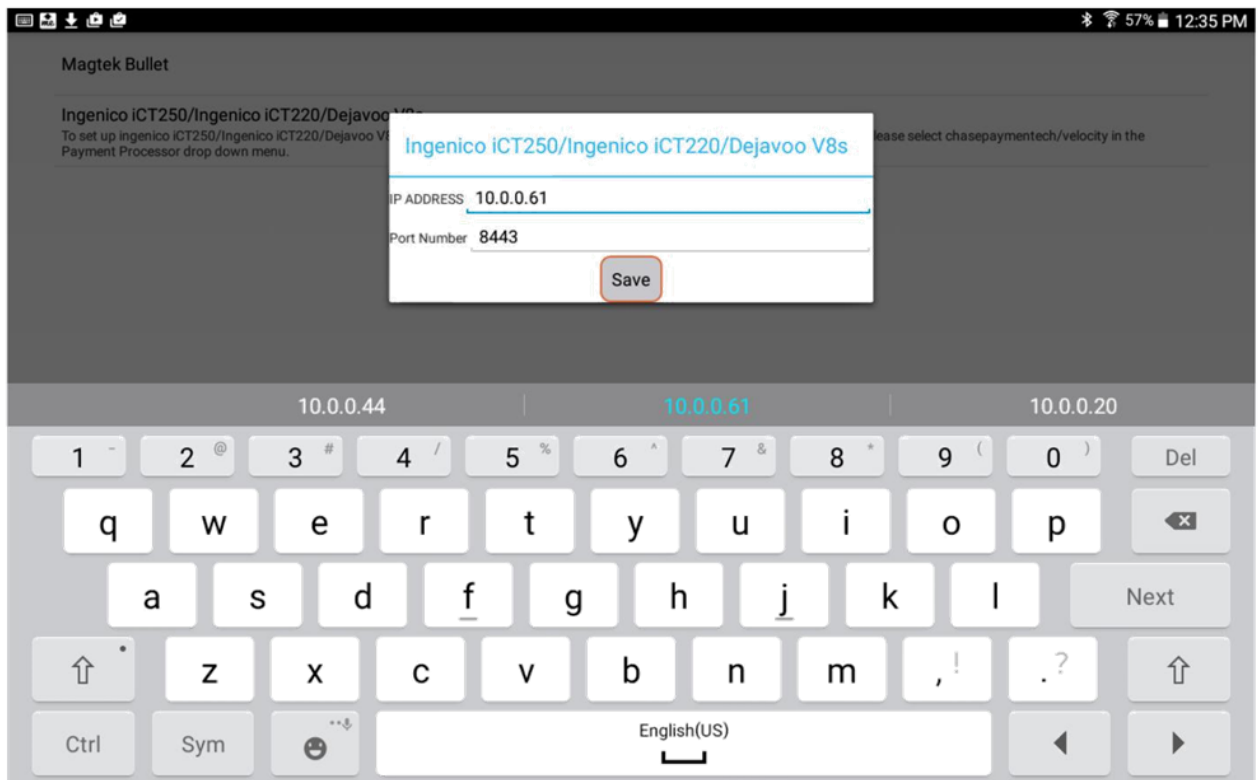

View Sales Data & Invoices

Open a browser and log into

<https://dvmms.com/denovo/account/login>

Enter your login information and password.

If you need help finding your login and password you can contact Dejavoo

You will also receive daily emails on batch close with you registered email address.