

OWNER'S MANUAL

*LG LED TV applies LCD screen with LED backlights.

Please read this manual carefully before operating your set and retain it for future reference.

۲

UB80** UB83** UB82** UF695*

۲



www.lg.com P/NO : MFL68484511(1504-REV05) Printed in Korea

2 TABLE OF CONTENTS

ENGLISH

۲

TABLE OF CONTENTS

3 LICENSES

3 **OPEN SOURCE SOFTWARE** NOTICE INFORMATION

3 EXTERNAL CONTROL DEVICE SETUP

4 SAFETY INSTRUCTIONS

10 - Viewing 3D Imaging (Only 3D models)

INSTALLATION PROCEDURE 12

ASSEMBLING AND PREPARING 12

- 12 Unpacking
- 15 Separate purchase
- 16 Parts and buttons
- 17 - Using the Joystick button Lifting and moving the TV
- 18 19 Setting up the TV
- 19 - Attaching the stand
- 21 Mounting on a table
- 22 Mounting on a wall
- 23 Tidying cables

24 MAKING CONNECTIONS

- 24 Antenna connection
- 25 Satellite dish connection HDMI connection
- 25 26 Headphone connection
- 27 DVI to HDMI connection
- 27 Component connection
- 28 Composite connection
- 28 MHL connection
- 29 Audio connection
- 29 - Digital optical audio connection
- 29 USB connection
- 30 CI module connection
- 30 Euro Scart connection

REMOTE CONTROL 31

MAGIC REMOTE FUNCTIONS 33

- 34 Registering Magic Remote
- 34 How to use Magic Remote
- 35 Precautions to Take when Using the Magic Remote

USING THE USER GUIDE 35

36 MAINTENANCE

- 36 Cleaning your TV
- 36 - Screen, frame, cabinet and stand
- 36 - Power cord

TROUBLESHOOTING 36

37 SPECIFICATIONS

WARNING

If you ignore the warning message, you may be seriously injured or there is a possibility of accident or death.

۲

CAUTION

If you ignore the caution message, you ٠ may be slightly injured or the product may be damaged.

NOTE

- The note helps you understand and use the product safely. Please read the note carefully before using the product.

LICENSES / OPEN SOURCE SOFTWARE NOTICE INFORMATION / EXTERNAL CONTROL DEVICE SETUP

۲

LICENSES

۲

Supported licenses may differ by model. For more information about licenses, visit www.lg.com.





OPEN SOURCE SOFTWARE NOTICE INFORMATION

To obtain the source code under GPL, LGPL, MPL, and other open source licenses, that is contained in this product, please visit *http://opensource.lge.com*.

In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to opensource@lge.com. This offer is valid for three (3) years from the date on which you purchased the product.

EXTERNAL CONTROL DEVICE SETUP

To obtain the external control device setup information, please visit www.lg.com.



۲

3

dts

2.0+Digital Out

۲


SAFETY INSTRUCTIONS


Please read these safety precautions carefully before using the product.

۲




۲

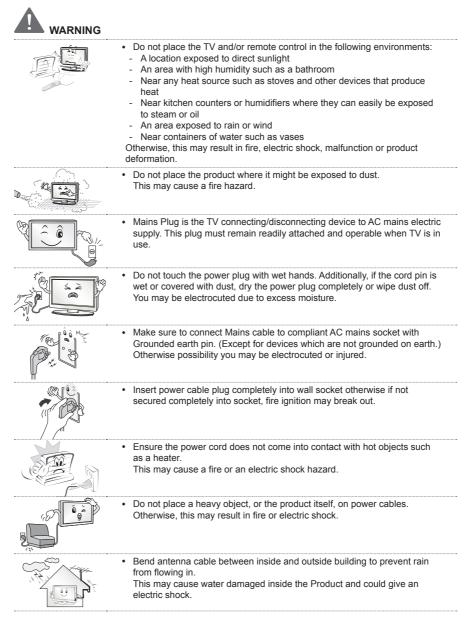


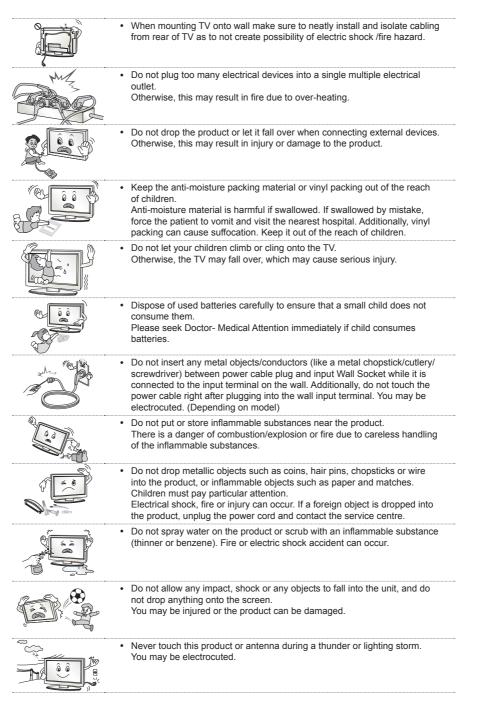

ENGLISH


ENGLISH

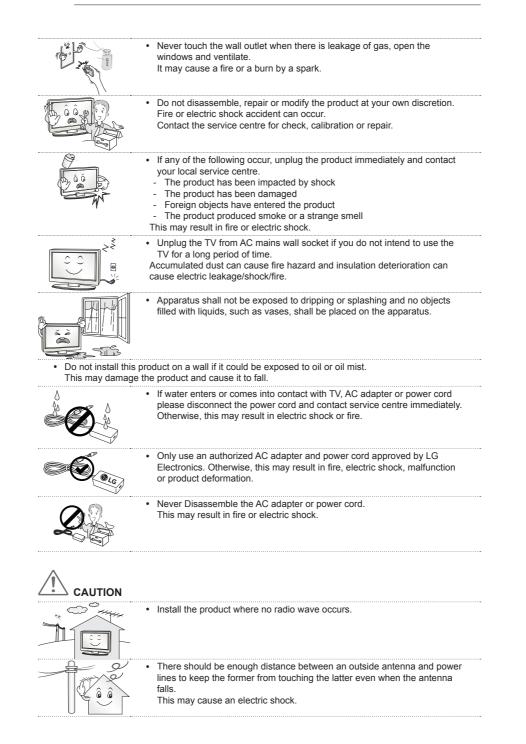

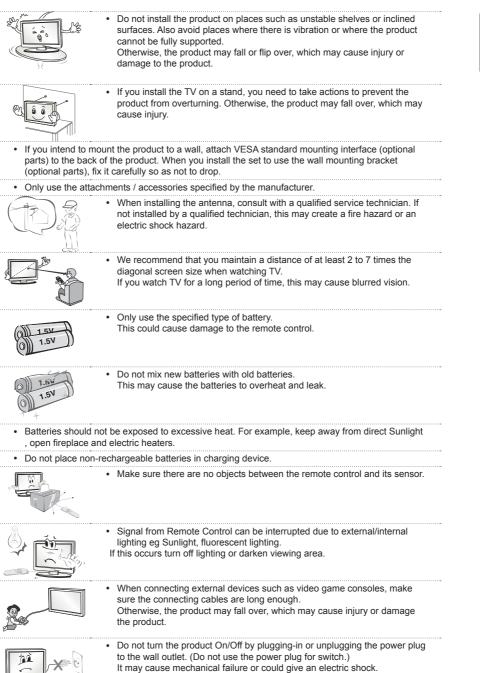


ENGLISH

۲

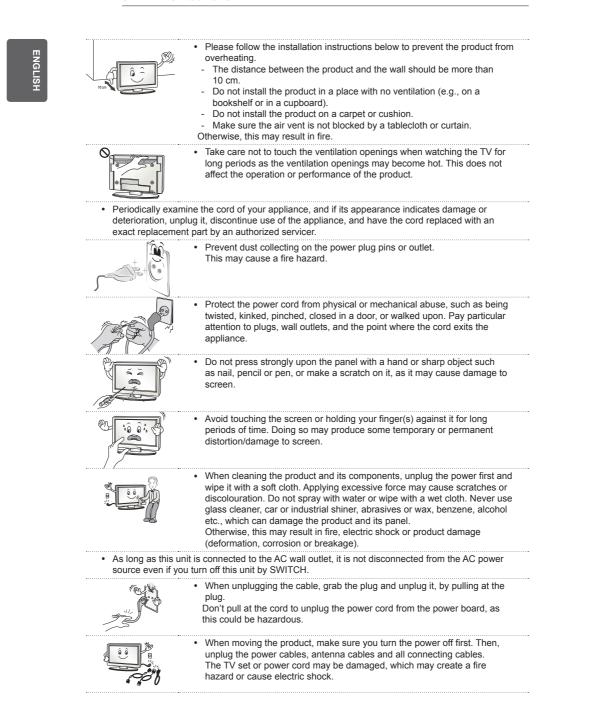

۲

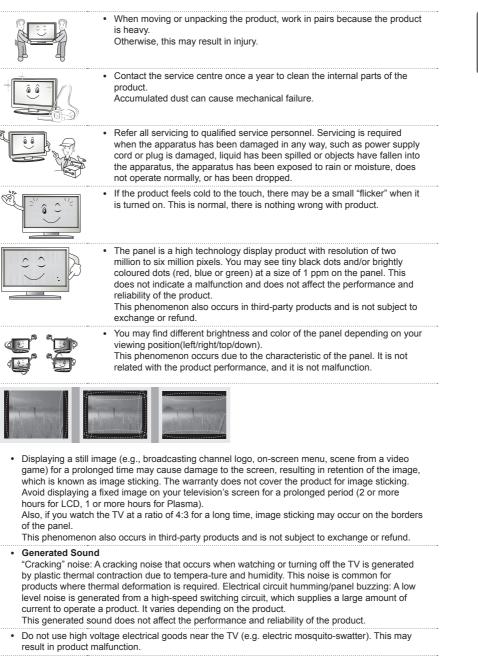

۲

۲

ENGLISH

9

10 SAFETY INSTRUCTIONS

ENGLISH

۲

Viewing 3D Imaging (Only 3D models)



Viewing Environment

- Viewing Time
 - When watching 3D contents, take 5 to 15 minute breaks every hour. Viewing 3D contents for a long period of time may cause headache, dizziness, fatigue or eye strain.

Those that have a photosensitive seizure or chronic illness

- Some users may experience a seizure or other abnormal symptoms when they are exposed to a flashing light or particular pattern from 3D contents.
- Do not watch 3D videos if you feel nausea, are pregnant and/ or have a chronic illness such as epilepsy, cardiac disorder, or blood pressure disease, etc.
- 3D Contents are not recommended to those who suffer from stereo blindness or stereo anomaly. Double images or discomfort in viewing may be experienced.
- If you have strabismus (cross-eyed), amblyopia (weak eyesight) or astigmatism, you may have trouble sensing depth and easily feel fatigue due to double images. It is advised to take frequent breaks than the average adult.

۲

If your eyesight varies between your right and left eye, correct your eyesight prior to watching 3D contents.

Symptoms which require discontinuation or refraining from watching 3D contents

- Do not watch 3D contents when you feel fatigue from lack of sleep, overwork or drinking.
- When these symptoms are experienced, stop using/watching 3D contents and get enough rest until the symptom subsides.
 - Consult your doctor when the symptoms persist. Symptoms may include headache, eyeball pain, dizziness, nausea, palpitation, blurriness, discomfort, double image, visual inconvenience or fatigue.



Viewing Environment

Viewing Distance

Maintain a distance of at least twice the screen diagonal length when watching 3D contents. If you feel discomfort in viewing 3D contents, move further away from the TV.

Viewing Age

- Infants/Children
- Usage/ Viewing 3D contents for children under the age of 6 are prohibited.
- Children under the age of 10 may overreact and become overly excited because their vision is in development (for example: trying to touch the screen or trying to jump into it. Special monitoring and extra attention is required for children watching 3D contents.
- Children have greater binocular disparity of 3D presentations than adults because the distance between the eyes is shorter than that of adults. Therefore they will perceive more stereoscopic depth compared to adults for the same 3D image.
- Teenagers

Teenagers under the age of 19 may react with sensitivity due to stimulation from light in 3D contents. Advise them to refrain from watching 3D contents for a long time when they are tired. Elderly

۲

The elderly may perceive less 3D effect compared to the young. Do not sit closer to the TV than the recommended distance.

Cautions when using the 3D glasses

- Make sure to use LG 3D glasses. Otherwise, you may not be able to view 3D videos properly. Do not use 3D glasses instead of your normal glasses, sunglasses or protective goggles.
- Using modified 3D glasses may cause eye strain or image distortion.
- Do not keep your 3D glasses in extremely high or low temperatures. It will cause deformation. The 3D glasses are fragile and are easily scratched. Always use a soft, clean piece of cloth when wiping the lenses. Do not scratch the lenses of the 3D glasses with sharp objects or clean/wipe them with chemicals.

12 INSTALLATION PROCEDURE / ASSEMBLING AND PREPARING



۲

NOTE

- Image shown may differ from your TV.
- Your TV's OSD (On Screen Display) may differ slightly from that shown in this manual.
- The available menus and options may differ from the input source or product model that you are using. New features may be added to this TV in the future.
- The TV can be placed in standby mode in order to reduce the power consumption. And the TV should be turned off if it will not be watched for some time, as this will reduce energy consumption.
- The energy consumed during use can be significantly reduced if the level of brightness of the picture is reduced, and this will reduce the overall running cost.

INSTALLATION PROCEDURE

- 1 Open the package and make sure all the accessories are included.
- 2 Attach the stand to the TV set.
- 3 Connect an external device to the TV set.
- Make sure the network connection is available. 4
 - You can use the TV network functions only when the network connection is made.

ASSEMBLING AND PREPARING

Unpacking


Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and item. ۲

CAUTION

- Do not use any unapproved items to ensure the safety and product life span.
- Any damage or injuries caused by using unapproved items are not covered by the warranty. •
 - Some models have a thin film attached on to the screen and this must not be removed.



- The items supplied with your product may vary depending on the model. Product specifications or contents of this manual may be changed without prior notice due to upgrade of product functions.
- For an optimal connection, HDMI cables and USB devices should have bezels less than 10 mm thick and 18 mm width. Use an extension cable that supports USB 2.0 if the USB cable or USB memory stick does not fit into your TV's USB port.





*A≦ 10 mm *B ≦ 18 mm

- Use a certified cable with the HDMI logo attached.
- If you do not use a certified HDMI cable, the screen may not display or a connection error may occur. (Recommended HDMI Cable Types)
- High-Speed HDMI[®]/[™] cable (3 m or less) High-Speed HDMI[®]/[™] cable with Ethernet (3 m or less)

ENGLISH

۲





(AA)

Magic Remote, Batteries

(Only UB80**, UB82**,

UB83**, UF695*)

(See p. 33)



Owner's Manual

Remote Control, Batteries

(AAA) (Depending on model) The remote control will not be included for all sales market. (See p. 31, 32)



Cinema 3D Glasses The number of 3D glasses may differ depending on the model or country. (Only UB83**)

A 2320000000000

Cable Holder (See p. 23)



Power Cord

۲

Stand Body / Stand Base (Only UB83**-ZB) (See p. 20)



Stand Base (Only UB83**-ZG, UF695*-ZA) (See p. 19)

۲



Cable Managements 2 EA (Depending on model) (See p. 23)

14 ASSEMBLING AND PREPARING



۲



Scart Gender Cable (See p. 30)

Ð

Stand Screws

8 EA, M4 x L20

4 EA, M4 x L20 (Only UB80**, UB82**, UF695*-ZB) (See p. 19)

(See p. 20)

(Only UB83**-ZB)



Composite Gender Cable (See p. 27, 28)



Stand Screws 4 EA, M4 x L21 (Only UB83**-ZG, UF695*-ZA) (See p. 19)




Component Gender Cable (See p. 27)




Ferrite core (Depending on model)

۲



(See p. 19)

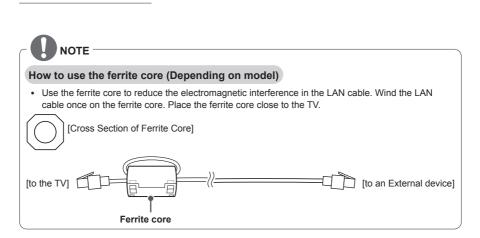

ASSEMBLING AND PREPARING 15

ENGLISH

۲

Separate purchase

Separate purchase items can be changed or modified for quality improvement without any notification. Contact your dealer to buy these items. These devices only work with certain models.

AN-VC5**			
Dual Play Glasses	Cinema 3D Glasses	Magic Remote	
AG-F***DP	AG-F***	AN-MR500	
,			

Video Call Camera

۲

LG Audio Device

Compatibility	UB80** UB82** UF695*	UB83**
AG-F***DP Dual Play Glasses		•
AG-F*** Cinema 3D Glasses		•
AN-MR500 Magic Remote	•	•
AN-VC5** Video Call Camera	•	•
LG Audio Device	•	•

The model name or design may be changed depending on the upgrade of product functions, manufacturer's circumstances or policies.


16 ASSEMBLING AND PREPARING




۲

Parts and buttons


A type : UB83**-ZB





۲





Intelligent sensor - Adjusts the image quality and brightness based on the surrounding environment.
 Joystick Button - This button is located behind the TV screen.

ASSEMBLING AND PREPARING 17

• You can set the Power Indicator Light to on or off by selecting **OPTION** in the main menus.

۲

ENGLISH

۲

Using the Joystick button

NOTE

You can simply operate the TV functions, pressing or moving the joystick button up, down, left or right.

Basic Functions

Power On	When the TV is turned off, place your finger on the joystick button and press it once and release it.
Power Off	When the TV is turned on, place your finger on the joystick button and press it once for a few seconds and release it. (However, if the Menu button is on the screen, pressing and holding the joystick button will let you exit the Menu.)
Volume Control	If you place your finger over the joystick button and move it left or right, you can adjust the volume level you want.
Programmes Control	If you place your finger over the joystick button and move it up or down, you can scrolls through the saved programmes you want.

۲

When your finger over the joystick button and push it to the up, down, left or right, be careful not
to press the joystick button. If you press the joystick button first, you may not be able to adjust the
volume level and saved programmes.

Adjusting the Menu

When the TV is turned on, press the joystick button one time. You can adjust the Menu items($(\underline{0}, \underline{0}, \mathbf{X}, \underline{\bullet})$) moving the joystick button up, down, left or right.

6	Q	TV off	Turns the power off.
	Ø	Settings	Accesses the main menu.
×	X	Close	Clears on-screen displays and returns to TV viewing.
	•	Input List	Changes the input source.

18 ASSEMBLING AND PREPARING

۲



۲

Lifting and moving the TV


Please note the following advice to prevent the TV from being scratched or damaged and for safe transportation regardless of its type and size.



- Avoid touching the screen at all times, as this may result in damage to the screen.
- It is recommended to move the TV in the box or packing material that the TV originally came in.
- Before moving or lifting the TV, disconnect the power cord and all cables.
- When holding the TV, the screen should face away from you to avoid damage.



 Hold the top and bottom of the TV frame firmly. Make sure not to hold the transparent part, speaker, or speaker grill area.



- When transporting a large TV, there should be at least 2 people.
- When transporting the TV by hand, hold the TV as shown in the following illustration.



- When transporting the TV, do not expose the TV to jolts or excessive vibration.
- When transporting the TV, keep the TV upright, never turn the TV on its side or tilt towards the left or right.
- Do not apply excessive pressure to cause flexing / bending of frame chassis as it may damage screen.
- When handling the TV, be careful not to damage the protruding joystick button.


ENGLISH

۲

Image shown may differ from your TV. 1 Attaching the stand UB80**, UB82**, UF695*-ZB 1 A Stand Base B Stand Base 1 œ Ø 2 2


UB83**-ZG, UF695*-ZA

۲




1 Attach the stand to the TV using the upper mounting hole on the back of the TV. 2 Attach the stand to the TV using the lower

connection on the back of the TV.




Setting up the TV

- 1 Attach the stand to the TV using the upper mounting hole on the back of the TV.
- Attach the stand to the TV using the lower connection on the back of the TV.




ASSEMBLING AND PREPARING




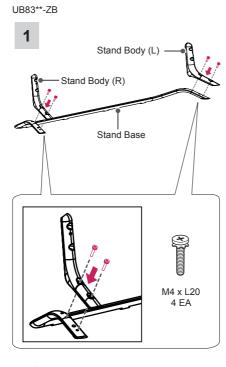





- Attach the stand to the TV using the upper mounting hole on the back of the TV.
 Attach the stand to the TV using the lower connection on the back of the TV.



- When attaching the stand to the TV set, place the screen facing down on a cushioned table or flat surface to protect the screen from scratches.
- Make sure that the screws are inserted correctly and fastened securely. (If they are not fastened securely enough, the TV may tilt forward after being installed.)
 Do not use too much force and over tighten the screws; otherwise screw may be damaged and not tighten correctly.


NOTE

۲

 Remove the stand before installing the TV on a wall mount by performing the stand attachment in reverse.

Mounting on a table

- 1 Lift and tilt the TV into its upright position on a table.
 - Leave a 10 cm (minimum) space from the wall for proper ventilation.




2 Connect the power cord to a wall outlet.

• Do not place the TV near or on sources of heat, as this may result in fire or other damage.

Securing the TV to a wall

۲

(This feature is not available for all models.)



- 1 Insert and tighten the eye-bolts, or TV brackets and bolts on the back of the TV.
- If there are bolts inserted at the eyebolts position, remove the bolts first.2 Mount the wall brackets with the bolts to the
- 2 Mount the wall brackets with the bolts to the wall.
- Match the location of the wall bracket and the eye-bolts on the rear of the TV. 3 Connect the eye-bolts and wall brackets tightly
- 3 Connect the eye-bolts and wall brackets tightly with a sturdy rope.

Make sure to keep the rope horizontal with the flat surface.

• Make sure that children do not climb on or hang on the TV.

NOTE

- Use a platform or cabinet that is strong and large enough to support the TV securely.
- Brackets, bolts and ropes are not provided. You can obtain additional accessories from your local dealer.


22 ASSEMBLING AND PREPARING

۲

Mounting on a wall

Attach an optional wall mount bracket at the rear of the TV carefully and install the wall mount bracket on a solid wall perpendicular to the floor. When you attach the TV to other building materials, please contact qualified personnel. LG recommends that wall mounting be performed by a qualified professional installer. We recommend the use of LG's wall mount bracket.


When you do not use LG's wall mount bracket, please use a wall mount bracket where the device is adequately secured to the wall with enough space to allow connectivity to external devices.



Make sure to use screws and wall mount bracket that meet the VESA standard. Standard dimensions for the wall mount kits are described in the following table.

Separate purchase(Wall Mounting Bracket)

Model	49/55UB83**	42UB82**
	49/55UB82**	40UB80**
	49/55UF695*	40UF695*
VESA (A x B)	400 x 400	200 x 200
Standard screw	M6	M6
Number of	4	4
screws		
Wall mount	LSW440B	LSW240B
bracket	MSW240	MSW240
Model	60UF695*	
VESA (A x B)	400 x 400	
Standard screw	M6	
Number of	4	
screws		
Wall mount	LSW440B	
bracket		



Disconnect the power first

- Disconnect the power first, and then move or install the TV. Otherwise electric shock may occur.
- If you install the TV on a ceiling or slanted wall, it may fall and result in severe injury. Use an authorised LG wall mount and contact the local dealer or qualified personnel.
- Do not over tighten the screws as this may cause damage to the TV and void your warranty.

۲

 Use the screws and wall mounts that meet the VESA standard. Any damages or injuries by misuse or using an improper accessory are not covered by the warranty.

NOTE

- Use the screws that are listed on the VESA standard screw specifications.
- The wall mount kit includes an installation
- manual and necessary parts.The wall mount bracket is not provided.
- You can obtain additional accessories from your local dealer. • The length of screws may differ
- depending on the wall mount. Make sure to use the proper length.
- For more information, refer to the manual supplied with the wall mount.


Tidying cables

Image shown may differ from your TV.

- 1 Gather and bind the cables with the Cable
- Holder and the Cable Management.
 Fix the Cable Management firmly to the TV.

(Only UB80**, UB82**, UB83**)


۲



1 Gather and bind the cables with the **Cable** Holder.

(Only UF695*)

۲



 Do not move the TV by holding the cable holder, as the cable holder may break, and injuries and damage to the TV may occur. ۲

24 MAKING CONNECTIONS

۲

MAKING CONNECTIONS


This section on **MAKING CONNECTIONS** mainly uses diagrams for the UB83**-ZB models.

Connect various external devices to the TV and switch input modes to select an external device. For more information of external device's connection, refer to the manual provided with each device.

Available external devices are: HD receivers, DVD players, VCRs, audio systems, USB storage devices, PC, gaming devices, and other external devices.

- The external device connection may differ from the model.
- Connect external devices to the TV regardless of the order of the TV port.
- If you record a TV programme on a DVD recorder or VCR, make sure to connect the TV signal input cable to the TV through a DVD recorder or VCR. For more information of recording, refer to the manual provided with the connected device.
- Refer to the external equipment's manual for operating instructions.
- If you connect a gaming device to the TV, use the cable supplied with the gaming device.
- In PC mode, there may be noise associated with the resolution, vertical pattern, contrast or brightness. If noise is present, change the PC output to another resolution, change the refresh rate to another rate or adjust the brightness and contrast on the PICTURE menu until the picture is clear.
- In PC mode, some resolution settings may not work properly depending on the graphics card.
- If ULTRA HD content is played on your PC, video or audio may become disrupted intermittently depending on your PC's performance.

Antenna connection



Connect the TV to a wall antenna socket with an RF cable (75 $\Omega). \label{eq:result}$


۲

- Use a signal splitter to use more than 2 TVs.
- If the image quality is poor, install a signal amplifier properly to improve the image quality.
- If the image quality is poor with an antenna connected, try to realign the antenna in the correct direction.
- An antenna cable and converter are not supplied.
- Supported DTV Audio: MPEG, Dolby Digital, Dolby Digital Plus, HE-AAC
- This TV cannot receive ULTRA HD (3840 x 2160 pixels) broadcasts directly because the related standards have not been confirmed.



Satellite dish connection

(Only satellite models)




Connect the TV to a satellite dish to a satellite socket with a satellite RF cable (75 $\Omega).$

۲

HDMI connection

۲

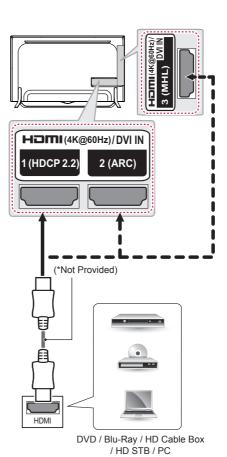

Transmits the digital video and audio signals from an external device to the TV. Connect the external device and the TV with the HDMI cable as shown. Choose any HDMI input port to connect. It does not matter which port you use.



۲

NOTE

- It is recommended to use the TV with the HDMI connection for the best image quality.
- Use the latest High Speed HDMI™ Cable with CEC (Customer Electronics Control) function.
- High Speed HDMI™ Cables are tested to carry an HD signal up to 1080p and higher.
- Supported HDMI Audio format : Dolby Digital (32 kHz, 44.1 kHz, 48 kHz), DTS(44.1 kHz, 48 kHz), PCM (32 kHz, 44.1 kHz, 48 kHz, 96 kHz, 192 kHz)


4K @ 50/60 Hz Support Format

Resolution	Frame rate (Hz)	Colour Depth / Chroma Sampling		
3840 x 2160p 4096 x 2160p	50.00 59.94 60.00	8 bit / YCbCr 4:2:0		

ARC (Audio Return Channel)

- An external audio device that supports SIMPLINK and ARC must be connected using HDMI (4K @ 60 Hz) / DVI IN 2 (ARC) port.
- When connected with a high-speed HDMI cable, the external audio device that supports ARC outputs optical SPDIF without additional optical audio cable and supports the SIMPLINK function

Headphone connection



Headphone


۲

Transmits the headphone signal from the TV to an external device. Connect the external device and the TV with the headphone as shown.

NOTE


- AUDIO menu items are disabled when connecting a headphone.
- Optical Digital Audio Out is not available
- when connecting a headphone. Headphone impedance: 16 Ω
- .
- Max audio output of headphone: 0.627 mW to 1.334 mW •
- Headphone jack size: 0.35 cm

MAKING CONNECTIONS 27

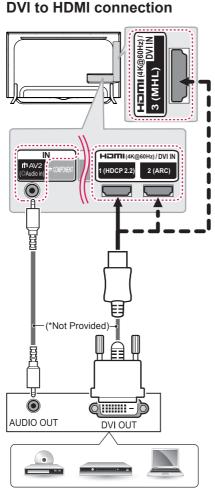

DVD / Blu-Ray / HD Cable Box / HD STB / PC


Transmits the digital video signal from an external device to the TV. Connect the external device and the TV with the DVI-HDMI cable as shown. To transmit an audio signal, connect an audio cable. Choose any HDMI input port to connect. It does not matter which port you use.



۲

- mode may not work if a HDMI to DVI Cable is in use.
 When using the HDMI/DVI cable, only
- Single link is supported.

Component connection

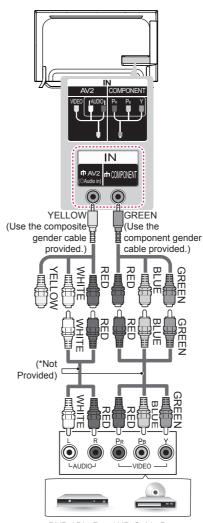

DVD / Blu-Ray / HD Cable Box

Transmits analogue video and audio signals from an external device to the TV. Connect the external device and the TV with a component cable(or component gender cable) as shown.



۲

 If cables are not installed correctly, it could cause this image to display in black and white or with distorted colours.


۲

28 MAKING CONNECTIONS

Composite connection



۲

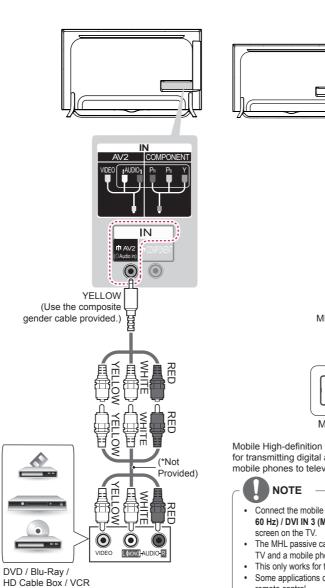

Transmits analog video and audio signals from an external device to the TV. Connect the external device and the TV with the composite cable as shown.


MHL connection

MHL passive cable (*Not Provided) (*Not Provid

۲

SB

- Connect the mobile phone to the HDMI (4K @ 60 Hz) / DVI IN 3 (MHL) port to view the phone screen on the TV.
- The MHL passive cable is needed to connect the TV and a mobile phone.
- This only works for the MHL-enabled phone.Some applications can be operated by the
- remote control.
- For some mobile phones supporting MHL, you can control with the Magic Remote.
 Remove the MHL passive cable from the TV when:
- Remove the MHL passive cable from the TV when: - the MHL function is disabled
- your mobile device is fully charged in standby mode

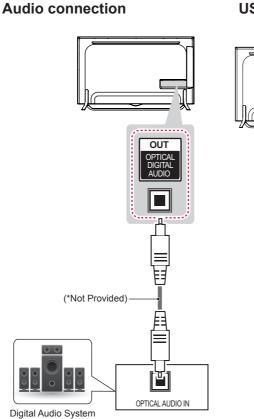

You may use an optional external audio system instead of the built-in speaker.

Digital optical audio connection


Transmits a digital audio signal from the TV to an external device. Connect the external device and the TV with the optical audio cable as shown.

NOTE

۲

- Do not look into the optical output port. Looking at the laser beam may damage your vision.
- Audio with ACP (Audio Copy Protection) function may block digital audio output. .



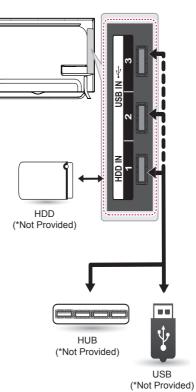

Connect a USB storage device such as a USB flash memory, external hard drive, or a USB memory card reader to the TV and access the SmartShare menu to use various multimedia files.

NOTE

۲


- Some USB Hubs may not work. If a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.


30 MAKING CONNECTIONS



۲

CI module connection






View the encrypted (pay) services in digital TV mode. This feature is not available in all countries.



- Check if the CI module is inserted into the PCMCIA CARD SLOT in the right direction. If the module is not inserted properly, this can cause damage to the TV and the PCMCIA card slot.
- If the TV does not display any video and audio when CI+ CAM is connected, please contact to the Terrestrial/Cable/ Satellite Service Operator.

Euro Scart connection

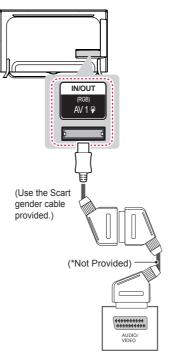

Transmits the video and audio signals from an external device to the TV set. Connect the external device and the TV set with the euro scart cable (or Scart gender cable) as shown.

۲

Output Type Current input mode	AV1 (TV Out ¹)	
Digital TV	Digital TV	
Analogue TV, AV		
Component	Analogue TV	
HDMI		

1 TV Out : Outputs Analogue TV or Digital TV signals.



- Any Euro scart cable used must be signal shielded.
- When watching digital TV in 3D imaging mode, only 2D out signals can be output through the SCART cable. (Only 3D models)

REMOTE CONTROL

The descriptions in this manual are based on the buttons on the remote control. Please read this manual carefully and use the TV correctly. To replace batteries, open the battery cover, replace batteries (1.5 V AAA) matching the \bigoplus and \bigcirc ends to the label inside the compartment, and close the battery cover. To remove the batteries, perform the installation actions in reverse.


۲

۲

• Do not mix old and new batteries, as this may damage the remote control.

• The remote control will not be included for all sales market.

Make sure to point the remote control toward the remote control sensor on the TV. (Depending on model)

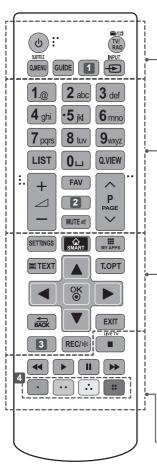

	() (POWER) Turns the TV on or off. TV/RAD 首/Eo Selects Radio, TV and DTV programme.
	SUBTITLE Recalls your preferred subtitle in digital mode.
	Q.MENU Accesses the quick menus.
	GUIDE Shows programme quide.
	1 AD By Pressing AD button, audio descriptions function will be enabled. (Depending on model)
	INFO Views the information of the current programme and screen. (Depending on model)
	INPUT Changes the input source.
	LIST Accesses the saved programme list.
	 ❑ (Space) Opens an empty space on the screen keyboard. (Depending on model) Q.VIEW Returns to the previously viewed programme. + △ — Adjusts the volume level.
	FAV Accesses your favourite programme list.
	2 INFO Views the information of the current programme and screen. (Depending on model)
	2 3D Used for viewing 3D video. (Depending on model)
	MUTE 时 Mutes all sounds.
	\wedge P \vee Scrolls through the saved programmes.
	∧ PAGE ∨ Moves to the previous or next screen.
	SETTINGS Accesses the main menus.
	SMART Accesses the Home menus.
	MY APPS Shows the list of Apps.
	Teletext buttons(TEXT / T.OPT) These buttons are used for teletext.
	Navigation buttons (up/down/left/right) Scrolls through menus or options.
	OK Selects menus or options and confirms your input.
	BACK Returns to the previous level.
	EXIT Clears on-screen displays and returns to TV viewing.
	3 APP/* Selects the MHP TV menu source. (Only Italy) (Depending on model)
	3 AD By Pressing AD button, audio descriptions function will be
1	enabled. (Depending on model)
	REC/* Starts to record and displays record menu. (Only Time Machine Ready
	supported model)
	LIVE TV Returns to LIVE TV.
	Control buttons (■, ▶, II, ◀, ▶) Controls the Premium contents, Time Machine ^{Ready} or SmartShare menus or the SIMPLINK compatible devices
	(USB or SIMPLINK or Time Machine ^{Ready}).
	4 Coloured buttons These access special functions in some menus.
	(Red: Green: Vellow

(•: Red, •: Green, •: Yellow, •: Blue)

۲

(Depending on model)

32

ENGLISH

۲

	L	(POWER) Turns the TV on or off.	
		SUBTITLE Recalls your preferred subtitle in digital mode.	
	 	RATIO Resizes an image.	
		INPUT Changes the input source.	
	H	TV/RAD ≝/≝ Selects Radio, TV and DTV programme.	
1 .,;@ 2 abc 3 def		LIST Accesses the saved programme list.	
4ghi 5jkl • 6mno	.	(Space) Opens an empty space on the screen keyboard.	
		Q.VIEW Returns to the previously viewed programme.	
		$+ \bigtriangleup - Adjusts$ the volume level.	
		FAV Accesses your favourite programme list.	
FAV		GUIDE Shows programme guide.	
		MUTE	
		\land P \checkmark Scrolls through the saved programmes.	
		PAGE Moves to the previous or next screen.	
INFO SMART MY APPS	PPS	INFO (i) Views the information of the current programme and screen.	
		SMART Accesses the Home menus.	
< <u>ок</u> >		MY APPS Shows the list of Apps.	
		Navigation buttons (up/down/left/right) Scrolls through menus or options.	
BACK SETTINGS EXIT		OK Selects menus or options and confirms your input.	
	t I	BACK Returns to the previous level.	
		SETTINGS Accesses the main menus.	
		EXIT Clears on-screen displays and returns to TV viewing.	
	 -	Coloured buttons These access special functions in some menus.	
SLEEP AD APP/*		(Centre Content and Content a	
۲ <u>+</u>	ľ	2 TELETEXT BUTTONS These buttons are used for teletext.	
	'	LIVE TV Returns to LIVE TV.	
		Q.MENU Accesses the quick menus.	
		Control buttons (■, ▶, II , ◀, ▶) Controls the Premium contents, Time Machine ^{Ready} or SmartShare menus or the SIMPLINK compatible devices (USB or SIMPLINK or Time Machine ^{Ready}).	
		REC/* Starts to record and displays record menu. (Only Time Machine Ready supported model)	
		SLEEP Sets the sleep timer.	

 $\ensuremath{\textbf{AD}}$ By Pressing AD button, audio descriptions function will be enabled. APP/* Selects the MHP TV menu source. (Only Italy) (Depending on model)

۲

MAGIC REMOTE FUNCTIONS 33

2

MAGIC REMOTE FUNCTIONS

This item is not included for all models.

When the message "Magic Remote battery is low. Change the battery." is displayed, replace the battery.


To replace batteries, open the battery cover, replace batteries (1.5 V AA) matching \oplus and \bigcirc ends to the label inside the compartment, and close the battery cover. Be sure to point the remote control toward the remote control sensor on the TV.

To remove the batteries, perform the installation actions in reverse.

۲

Do not mix old and new batteries, as this may damage the remote control.

(Only UB80**, UB82**, UB83**, UF695*)

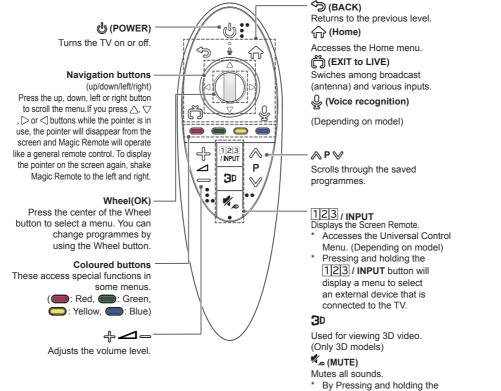

 By Pressing and holding the
 button, audio descriptions function will be enabled. (Depending on model)

۲

ENGLISH

34 MAGIC REMOTE FUNCTIONS



۲

Voice recognition(Depending on model)

Network connection is required to use the voice recognition function.

- 1. Press the Voice recognition button.
- 2. Speak when the voice display window appears on the left of the TV screen.
 - The voice recognition may fail when you speak too fast or too slow.
 - Use the Magic Remote no further than 10 cm from your face.
 - The recognition rate may vary depending on the user's characteristics (voice, pronunciation, intonation and speed) and the environment (noise and TV volume).

Registering Magic Remote


How to register the Magic Remote

To use the Magic Remote, first pair it with your TV.

(Wheel)

- Put batteries into the Magic Remote and turn the TV on.
 Point the Magic Remote at your
- TV and press the () Wheel (OK) on the remote control.
 - » If the TV fails to register the Magic Remote, try again after turning the TV off and back on.

How to deregister the Magic Remote



How to use Magic Remote



Precautions to Take when **Using the Magic Remote**

- Use the remote control within the specified range (within 10 m). You may experience communication failures when using the device outside the coverage area or if there are obstacles within the coverage area.
- You may experience communication failures depending on the accessories. Devices such as a microwave oven and wireless LAN operate in the same frequency band (2.4 GHz) as the Magic Remote. This may cause communication failures
- The Magic Remote may not work properly if a wireless router (AP) is within 1 meter of the TV. Your wireless router should be more than 1 m away from the TV.
- Do not disassemble or heat the battery. Do not drop the battery. Avoid avoid extreme shocks to the battery. •
- Inserting the battery the wrong way may


۲

result in explosion.

USING THE USER GUIDE

User Guide allows you to more easily access the detailed TV information.

- 1 Press the \bigoplus (Home) button to access the Home menu.
- 2 Select SETTINGS \rightarrow SUPPORT.
- 3 Select User Guide and press Wheel(OK).



۲

36 MAINTENANCE / TROUBLESHOOTING

ENGLISH

۲

MAINTENANCE

Cleaning your TV

Clean your TV regularly to keep the best performance and to extend the product lifespan.



- Make sure to turn the power off and disconnect the power cord and all other cables first. When the TV is left unattended and unused for a long time, disconnect the power cord from the .
 - wall outlet to prevent possible damage from lightning or power surges.

Screen, frame, cabinet and stand

- To remove dust or light dirt, wipe the surface with a dry, clean, and soft cloth.
 To remove major dirt, wipe the surface with a soft cloth dampened in clean water or a diluted mild detergent. Then wipe immediately with a dry cloth.



- Avoid touching the screen at all times, as this may result in damage to the screen. ٠
 - Do not push, rub, or hit the screen surface with your fingernail or a sharp object, as this may result in scratches and image distortions.

۲

- Do not use any chemicals as this may damage the product.
- Do not spray liquid onto the surface. If water enters the TV, it may result in fire, electric shock, or malfunction.

Power cord

Remove the accumulated dust or dirt on the power cord regularly.

TROUBLESHOOTING

Problem	Solution
Cannot control the TV with the remote control.	 Check the remote control sensor on the product and try again. Check if there is any obstacle between the product and the remote control. Check if the batteries are still working and properly installed (to , to).
No image display and no sound is produced.	 Check if the product is turned on. Check if the power cord is connected to a wall outlet. Check if there is a problem in the wall outlet by connecting other products.
The TV turns off suddenly.	 Check the power control settings. The power supply may be interrupted. Check if the Automatic Standby (Depending on model) / Sleep Timer / Off Time is activated in the TIME settings. If there is no signal while the TV is on, the TV will turn off automatically after 15 minutes of inactivity.
When connecting to the PC (HDMI/ DVI), 'No signal' or 'Invalid Format' is displayed.	 Turn the TV off/on using the remote control. Reconnect the HDMI cable. Restart the PC with the TV on.

SPECIFICATIONS

Wireless module (LGSBW41) specification					
	Wireless LAN	Bluetooth			
Standard	IEEE 802.11a/b/g/n	Standard Bluetooth Version 3.			
Frequency Range	2400 to 2483.5 MHz 5150 to 5250 MHz 5725 to 5850 MHz (for Non EU)	Frequency Range	2400 to 2483.5 MHz		
Output Power (Max.) 802.11a: 13 dBm 802.11b: 15 dBm 802.11g: 14 dBm 802.11n - 2.4 GHz: 16 dBm 802.11n - 5 GHz: 16 dBm		Output Power (Max.)	10 dBm or lower		

Because band channel used by the country could be different, the user can not change or adjust the operating frequency and this product is set for the regional frequency table.
This device should be installed and operated with minimum distance 20 cm between the

 This device should be installed and operated with minimum distance 20 cm between the device and your body. And this phrase is for the general statement for consideration of user environment.





42UB82** 49UB82** MODELS 42UB820V-ZG 49UB820V-ZG 42UB820V-ZH 49UB820V-ZH With stand (mm) 951 x 604 x 218 1093 x 684 x 248 Dimensions (W x H x D) Without stand (mm) 951 x 569 x 37.3 1093 x 646 x 38.2 With stand (kg) 11.8 18 Weight Without stand (kg) 11.5 17.5 AC 100-240 V ~ 50/60 Hz AC 100-240 V ~ 50/60 Hz Power requirement 120 W 180 W Power consumption 55UB82** 40UB80** MODELS 55UB820V-ZG 40UB800V-ZA 55UB820V-ZH With stand (mm) 1233 x 766 x 248 900 x 568 x 217 Dimensions (W x H x D) Without stand (mm) 1233 x 727 x 37.8 900 x 529 x 48.0 With stand (kg) 21 10.9 Weight Without stand (kg) 20.5 10.6 Power requirement AC 100-240 V ~ 50/60 Hz AC 100-240 V ~ 50/60 Hz 190 W 100 W Power consumption 49UB83** MODELS 49UB830V-ZG 49UB830V-ZB 49UB836V-ZG With stand (mm) 1093 x 689 x 242 1093 x 684 x 248 Dimensions (W x H x D) Without stand (mm) 1093 x 646 x 38.2 1093 x 646 x 38.2 With stand (kg) 18.2 18 Weight Without stand (kg) 17.5 17.5 AC 100-240 V ~ 50/60 Hz AC 100-240 V ~ 50/60 Hz Power requirement Power consumption 180 W 180 W 55UB83** MODELS 55UB830V-ZG 55UB830V-ZB 55UB836V-ZG With stand (mm) 1233 x 766 x 260 1233 x 766 x 248 Dimensions $(W \times H \times D)$ Without stand (mm) 1233 x 727 x 37.8 1233 x 727 x 37.8 With stand (kg) 21.2 21 Weight Without stand (kg) 20.5 20.5 AC 100-240 V ~ 50/60 Hz AC 100-240 V ~ 50/60 Hz Power requirement 190 W 190 W Power consumption

۲

Product specifications may be changed without prior notice due to upgrade of product functions.

 \odot

SPECIFICATIONS 39

			49UF695*		55UF695*	
MODELS			49UF695V-ZA 49UF6959-ZA		55UF695V-ZA 55UF6959-ZA	
Dimensions	With stand (mm)	mm) 1093 x 684 x 248		1233 x 766 x 248	
(W x H x D)	Without star	nd (mm)	1093 x 646 x 38.2		1233 x 727 x 37.8	
	With stand (kg)	18		21	
Weight	Without star	nd (kg)	17.5		20.5	
Power requireme	ent		AC 100-240 V ~ 50/60) Hz	AC 100-240 V ~ 50/60 Hz	
Power consumpt	tion		180 W		190 W	
			60UF695*		40UF695*	
N	IODELS		60UF695V-ZA 60UF6959-ZA		40UF695V-ZB 40UF6959-ZB	
Dimensions	With stand (mm)	1341 x 836 x 271		900 x 568 x 217	
(W x H x D)	Without star	nd (mm)	1341 x 788 x 39.1		900 x 529 x 48	
)A/sisht	With stand (kg)		26.5		10.9	
Weight	Without star	nd (kg)	25.8		10.6	
Power requireme	ent		AC 100-240 V ~ 50/60) Hz	AC 100-240 V ~ 50/60 Hz	
Power consumpt	tion		200 W		100 W	
CI Module Size	(W x H x D)		100.0 mm x 55.0 mm x 5.0 mm			
	Operating Te	emperature	0 °C to 40 °C		to 40 °C	
Environment	Operating Humidity		Less than 80 %		han 80 %	
condition	condition Storage Temperature Storage Humidity		-20 °C		°C to 60 °C	
			idity Less		ess than 85 %	
			Digital TV		Analogue TV	
DVB-C		DVB-T/T2 DVB-C DVB-S/S2	SEC		PAL/SECAM B/G/I/D/K SECAM L/L'	
		VHF, UHF C-Band, K	HF, UHF Band, Ku-Band		VHF: E2 to E12, UHF : E21 to E69, CATV: S1 to S20, HYPER: S21 to S47	
		DVB-S/S2 DVB-T/T2/	62 : 6,000 2/C & Analogue TV : 1,500			

۲

ENGLISH

۲

External antenna impedance 75 Ω



Please contact LG First. If you have any inquiries or comments, please contact LG customer information centre.

LG Customer Information Centre

۲

Record the model number and serial number of the TV.

Refer to the label on the back cover and quote this information to your dealer when requiring any service.

MODEL

۲

SERIAL

