


SHR-6082

8 Channel 120fps MPEG4 Standalone
DVR w/ DVD-RW



Dimensions (unit : in)

Front/Rear Panel

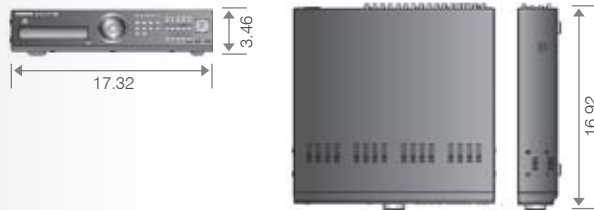

Summary

The new Samsung SHR-6082 DVR employs MPEG-4 video encoding for 8 channels of camera input and G.723 audio encoding for 4 channels, and supports simultaneous hard drive recording and playback. The SHR-6082 has various back up options such as USB ports and built-in DVD-RW, supports web browser access and records up to 120fps. This DVR also supports network connectivity, providing remote monitoring from a remote PC by transferring video and audio data.

Features

- 8CH DVR
- Simultaneous Record and Playback of 8-channel video data
- Video (MPEG-4) / Audio(ADPCM)
- Up to 120fps Recording Rate
- 4Ch Audio Inputs and 1Ch Audio Output
- Combined BNC and VGA Video Output for main display (up to 1280x1024)
- 250 GB SATA HDD Standard
- MAX 5 Internal HDD (HDD x 5)
- Mass storage hard disk backup through high-speed USB 2.0
- Various Search Modes: Time, Event, Backup, POS and Motion Detection
- Built-in DVD-RW
- HDD & DVD SATA Interface
- DDNS Support (Multiple Options)
- Built-in Web Server
- USB Mouse Control
- Event Notifications by E-mail
- Remote Monitoring function: NET-i Pro and Web viewer

Recommended Accessories

- GV-500GBHDS**, 500Gb SATA Video Hard Drive
- GV-1000GBHDS**, 1Tb SATA Video Hard Drive

Specifications

Video	Input	Composite	8 Channel 1.0Vp-p 75Ω
	Output	Composite	2 Channel
		VGA	1 Channel
		Loop Through	8 Channel
Live Display	Resolution	D1 (704x480)	
	Display Speed	240fps	
	Display Mode	Single; 4-,6-,8-,9-,13- splits; Sequence; PIP; Freeze	
Storage	Internal	Default	250 GB SATA
		Expansion Capability	500/1000GB SATA HDD x 5
Audio	Input	4 Channel (RCA Type)	
	Output	1 Channel (RCA Type)	
Recording	Events	Alarm, Motion, Video Loss, Schedule	
	Resolution	CIF (352x240), Half D1 (704x240), D1 (704x480)	
	Speed	120fps (CIF), 60fps(Half D1), 30fps(D1)	
Event	Alarm Function/ Alarm Input/ Alarm Output	Record/8 Channel/4 Channel	
	Motion Detection	Mode, Sensitivity, Alarm, Duration	
	Pre Event Set Time	5, 10, 20, 30 sec	
	Post Event Set Time	5, 10, 20, 30 sec / 1, 3, 5, 10, 20 min	
Playback	Search Mode	Calendar, Event, Time/Date, Text Search(for POS), Motion, Preview	
	Display Mode	Single /4-/9-/13-splits	
	Play Mode	2x Digital Zoom, Fast Forward/Fast Reverse - 2x, 4x, 8x, 16x, 32x, 64x	
Network	Interface	10/100/1000 BaseT	
	Protocol	ADSL(PPPoE),DHCP	
Control	RS-485	PTZ Control	
	Remote Controller	Yes	
Backup	Support Mouse	USB Mouse	
	DVD-RW	Yes	
	USB	USB 2.0, 3 ports USB Memory USB External HDD	
	Back up Viewer Format	AVI, EXE, DVR and SEC w/ Net I	
Client S/W	Support OS	Windows XP (Pro), Windows 2000 (Pro), Windows Vista (Home Basic/Premium)	
	Web Viewer	Support Live/REC/Search	
	Remote Viewer	Net-I	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)		
Operating Humidity	20%-85%		
Power	Power Supply	Adapter	
	Power Source	AC 100-240V	
Physical Specifications	Dimensions (WxHxD)	17.32 x 3.46 x 16.92 in (440 x 88 x 430mm)	
	Weight	16.35lb (~7.42kg)	